

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P1315641

Luminaire Tested: LDSQA3D13R359735DE010 3LSQPHR1MW

Issue Date: 1/29/2026

**Test Information**

Test Method: LM-79-2019  
Report Number: P1315641  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2510-583-5)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/29/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LDSQA3D13R359735DE010 3LSQPHR1MW  
Description: 3in Adjustable LED luminaire with, R35 optic, 3500K CCT AND, 97CRI , 3LSQPHR1MW TRIM  
Light Source: -  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1051.0 lumens  
Efficiency: N/A  
Efficacy: 72.0 lumens/watt  
Spacing Criteria (0/90/45): 0.57 / 0.56 / 0.51  
Luminous Opening: Rectangular (W 0.25' x L: 0.25' x H: 0')  
CIE Type: Direct

Input Watts (W): 14.6  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1315641  
CATALOG NUMBER: LDSQA3D13R359735DE010 3LSQPHR1MW

### Luminous Intensity Polar Plot

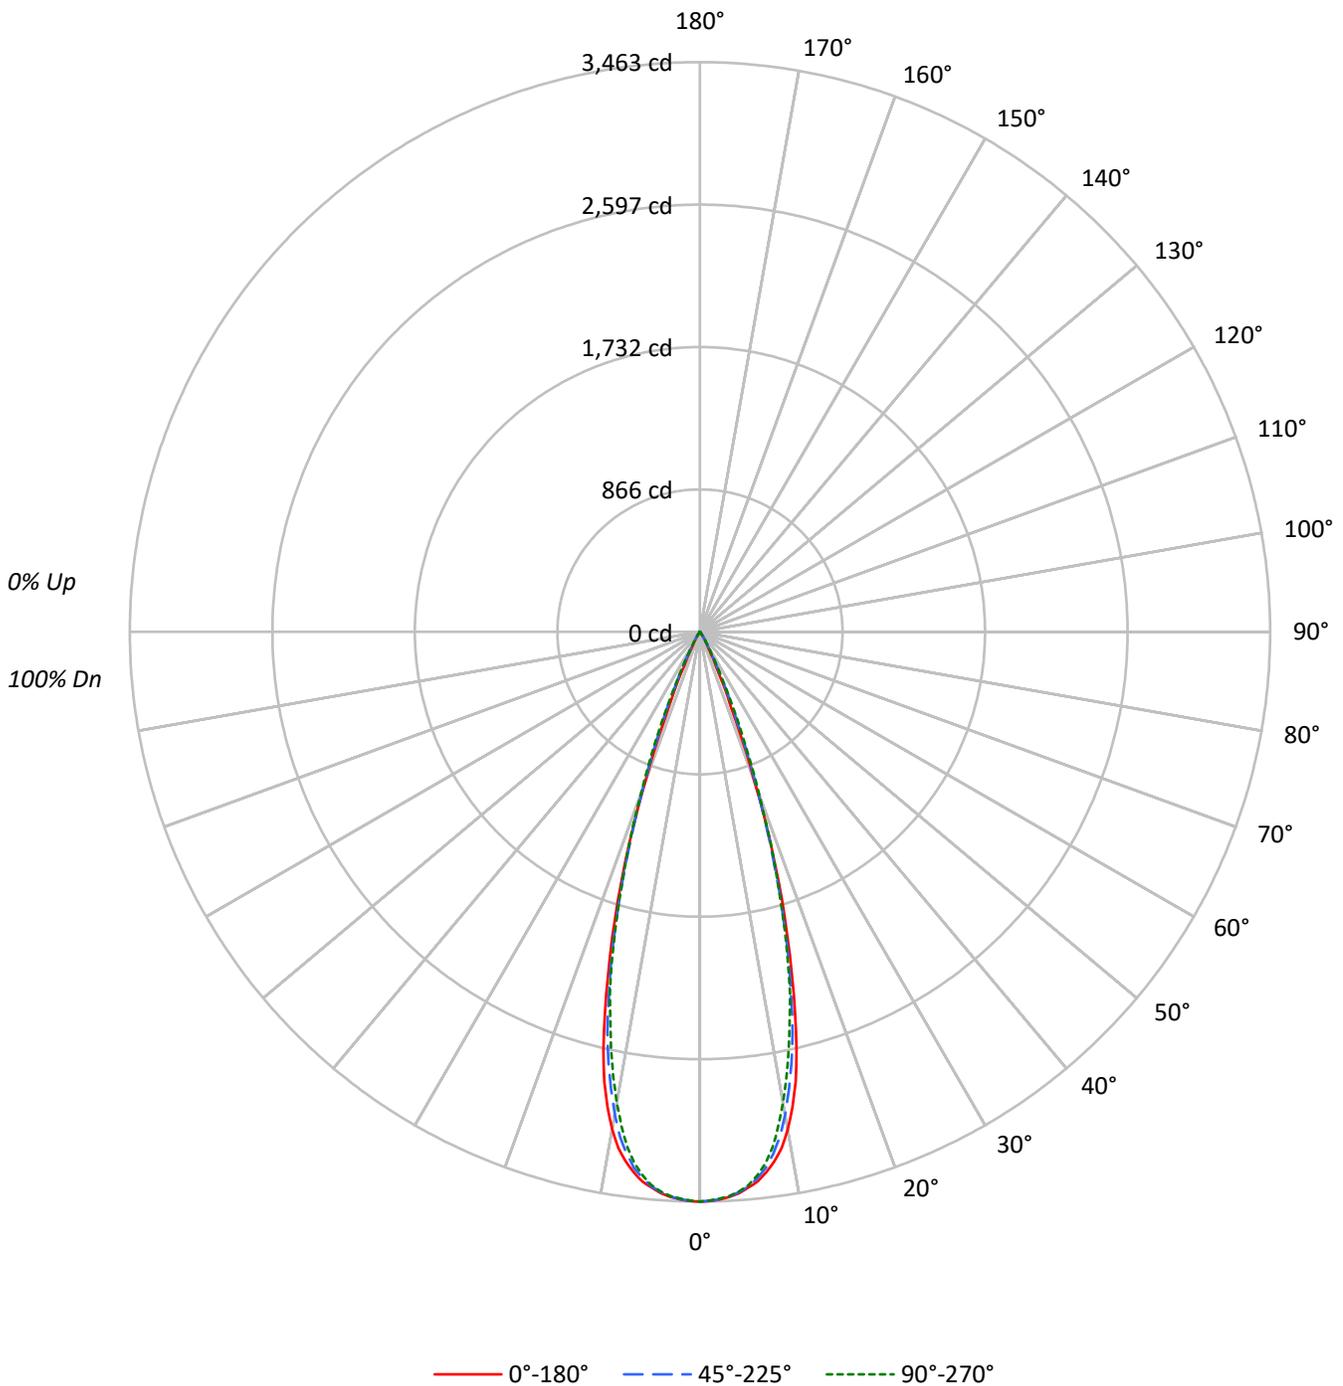



TEST NUMBER: P1315641

CATALOG NUMBER: LDSQA3D13R359735DE010 3LSQPHR1MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	102	102	102	100
1	115	113	111	109	113	111	109	108	107	106	104	103	102	101	100	99	98	98	98	98	97
2	111	108	105	102	109	106	103	101	103	101	99	100	98	97	97	96	95	95	95	95	93
3	108	103	100	97	106	102	99	96	99	97	94	97	95	93	95	93	92	93	93	92	90
4	104	99	95	92	103	98	94	92	96	93	91	94	92	90	93	90	89	93	90	89	87
5	101	95	91	88	100	95	91	88	93	90	87	92	89	87	90	88	86	90	88	86	85
6	98	92	88	85	97	91	88	85	90	87	84	89	86	84	88	85	83	88	85	83	82
7	96	89	85	82	94	89	85	82	87	84	81	86	83	81	85	83	81	85	83	81	80
8	93	86	82	79	92	86	82	79	85	81	79	84	81	79	83	80	78	83	80	78	77
9	90	84	80	77	89	83	79	77	82	79	76	82	79	76	81	78	76	81	78	76	75
10	88	81	77	75	87	81	77	74	80	77	74	80	76	74	79	76	74	79	76	74	73

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	596355	596355	596355
5°	586117	584855	583610
10°	537160	521018	508340
15°	384642	372375	367847
20°	178364	184503	190973
25°	42319	60200	62785
30°	12429	14219	16029
35°	2859	4562	4184
40°	607	1214	809
45°	219	219	219
50°	241	0	241
55°	0	0	0
60°	0	0	0
65°	0	0	0
70°	0	0	0
75°	0	0	0
80°	0	0	0
85°	0	0	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°

Vertical Angle: 52.5°

Luminance: 255 cd/sqm



TEST NUMBER: P1315641

CATALOG NUMBER: LDSQA3D13R359735DE010 3LSQPHR1MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	310.9	29.6
10°-20°	555.8	52.9
20°-30°	167.2	15.9
30°-40°	16.0	1.5
40°-50°	1.1	0.1
50°-60°	0.1	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1033.8	98.4
0°-40°	1049.8	99.9
0°-60°	1051.0	100.0
0°-90°	1051.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1051.0	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	3463	3463	3463	3463	3463	
5°	3390	3389	3383	3378	3376	314
15°	2157	2141	2088	2079	2063	570
25°	223	245	317	330	330	143
35°	14	18	22	24	20	13
45°	1	1	1	1	1	1
55°	0	0	0	0	0	0
65°	0	0	0	0	0	0
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	0



TEST NUMBER: P1315641

CATALOG NUMBER: LDSQA3D13R359735DE010 3LSQPHR1MW

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	3462.7	3462.7	3462.7	3462.7	3462.7
1°	3460.9	3460.9	3459.1	3459.1	3455.4
2°	3452.7	3453.6	3450.0	3449.1	3446.4
3°	3440.0	3437.3	3437.3	3435.5	3433.7
4°	3420.1	3414.7	3412.9	3413.8	3410.2
5°	3390.3	3389.4	3383.0	3378.5	3375.8
6°	3357.7	3351.3	3337.8	3326.0	3323.3
7°	3308.8	3295.2	3283.4	3259.0	3255.4
8°	3249.0	3227.3	3202.0	3167.6	3165.8
9°	3175.7	3140.4	3105.1	3058.9	3042.6
10°	3071.6	3039.0	2979.3	2938.5	2906.8
11°	2942.1	2901.4	2831.7	2782.8	2756.6
12°	2795.5	2757.5	2676.0	2631.6	2594.5
13°	2607.2	2575.5	2499.5	2450.6	2421.6
14°	2389.0	2365.5	2293.1	2271.3	2261.4
15°	2157.3	2141.0	2088.5	2079.4	2063.1
17.5°	1587.9	1560.7	1530.8	1536.3	1541.7
20°	973.2	1011.2	1006.7	1026.6	1042.0
22.5°	485.2	534.1	591.1	625.5	642.7
25°	222.7	245.3	316.8	330.4	330.4
27.5°	112.3	117.7	149.4	152.1	159.3
30°	62.5	67.0	71.5	79.7	80.6
32.5°	31.7	37.1	38.9	43.5	41.6
35°	13.6	18.1	21.7	23.5	19.9
37.5°	6.3	8.1	11.8	10.9	8.1
40°	2.7	3.6	5.4	4.5	3.6
42.5°	1.8	1.8	2.7	1.8	1.8
45°	0.9	0.9	0.9	0.9	0.9
47.5°	0.9	0.9	0.0	0.9	0.9
50°	0.9	0.0	0.0	0.0	0.9
52.5°	0.9	0.0	0.0	0.0	0.9
55°	0.0	0.0	0.0	0.0	0.0
57.5°	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0
62.5°	0.0	0.0	0.0	0.0	0.0
65°	0.0	0.0	0.0	0.0	0.0
67.5°	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1315641  
CATALOG NUMBER: LDSQA3D13R359735DE010 3LSQPHR1MW

**CANDELA DISTRIBUTION (continued):**

	0°	22.5°	45°	67.5°	90°
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)