

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P1315949

Luminaire Tested: LDSQA3D20R359735D010 3LSQPHRLP1MW

Issue Date: 1/29/2026

**Test Information**

Test Method: LM-79-2019  
Report Number: P1315949  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2510-583-15)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/29/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LDSQA3D20R359735D010 3LSQPHRLP1MW  
Description: 3in Adjustable LED luminaire with, R35 optic, 3500K CCT AND, 97CRI , 3LSQPHRLP1MW TRIM  
Light Source: -  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1034.0 lumens  
Efficiency: N/A  
Efficacy: 35.9 lumens/watt  
Spacing Criteria (0/90/45): 0.69 / 0.68 / 0.73  
Luminous Opening: Rectangular (W 0.25' x L: 0.25' x H: 0')  
CIE Type: Direct

Input Watts (W): 28.8  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1315949  
CATALOG NUMBER: LDSQA3D20R359735D010 3LSQPHRLP1MW

### Luminous Intensity Polar Plot

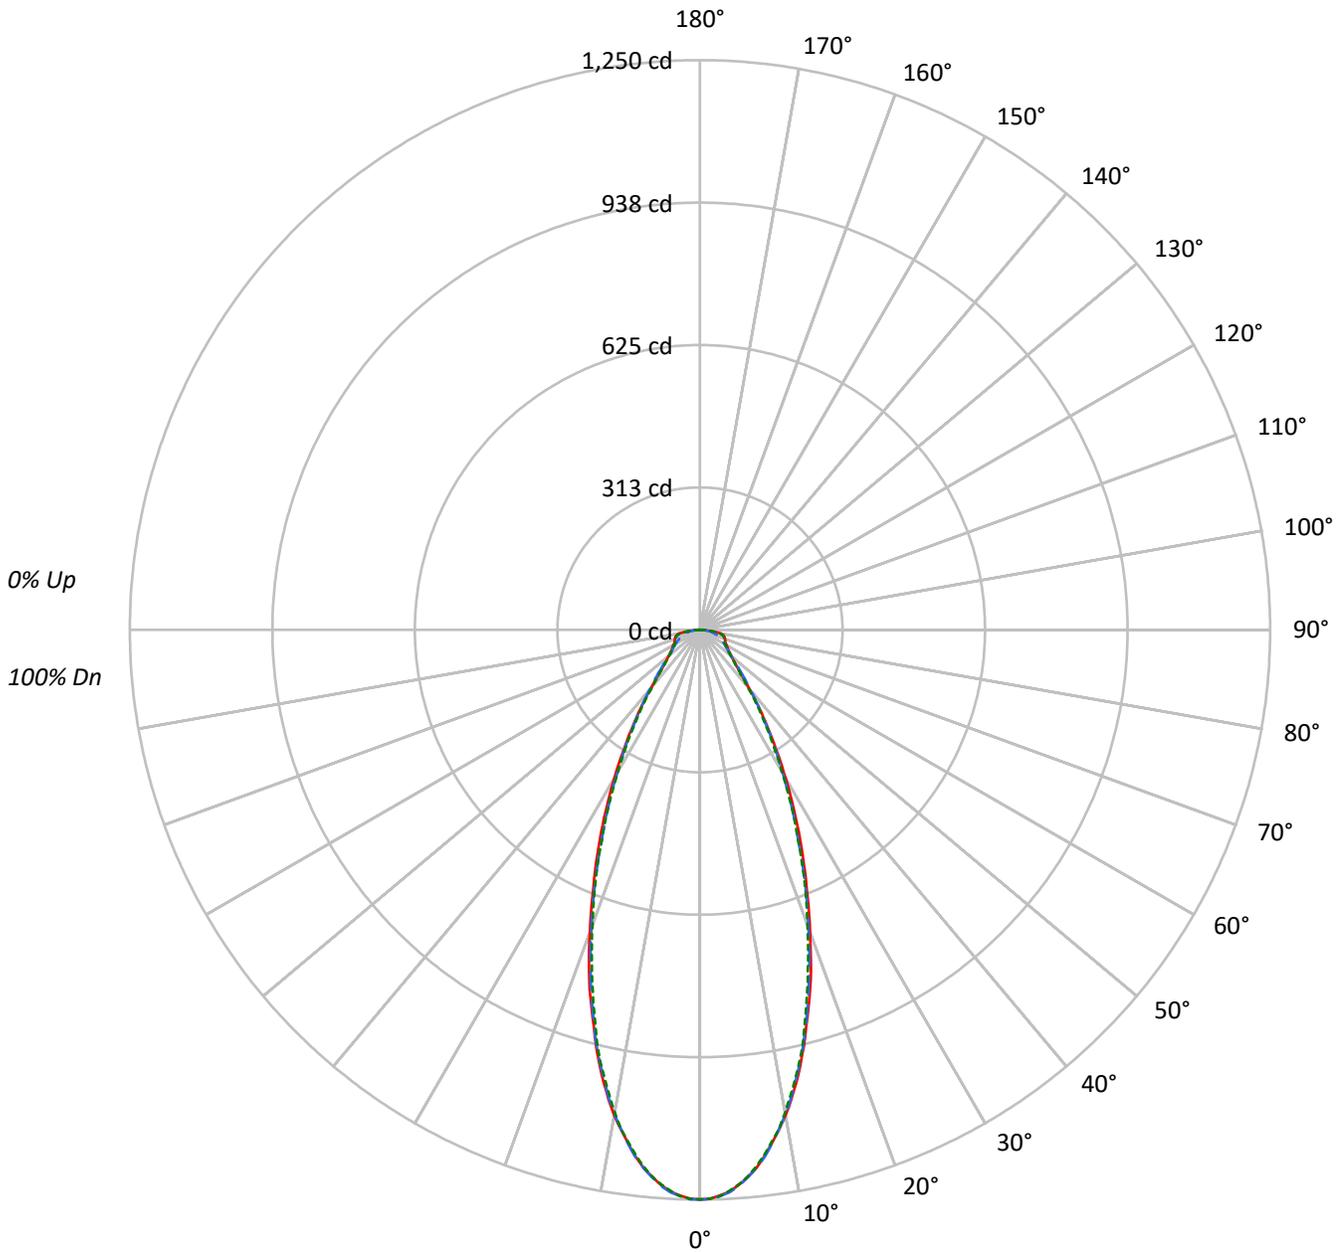

0% Up  
100% Dn

— 0°-180°    - - 45°-225°    - - - 90°-270°



TEST NUMBER: P1315949

CATALOG NUMBER: LDSQA3D20R359735D010 3LSQPHRLP1MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10		0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	102	102	100
1	111	107	104	101	109	105	102	99	101	99	96	97	95	93	94	92	91	91	91	89
2	104	98	92	88	101	96	91	87	92	88	85	89	86	83	86	84	81	81	81	79
3	97	89	83	78	95	88	82	77	85	80	76	82	78	75	80	77	74	74	74	72
4	92	82	75	70	90	81	75	70	79	73	69	77	72	68	75	71	67	67	67	65
5	86	76	69	64	84	75	69	64	73	68	63	72	67	63	70	66	62	62	62	60
6	82	71	64	59	80	70	64	59	69	63	58	67	62	58	66	61	57	57	57	56
7	77	66	60	55	76	66	59	54	64	58	54	63	58	54	62	57	54	54	54	52
8	73	62	56	51	72	62	55	51	61	55	51	60	54	50	59	54	50	50	50	49
9	70	59	52	48	68	58	52	48	57	52	47	56	51	47	55	51	47	47	47	46
10	66	56	49	45	65	55	49	45	54	49	45	53	48	45	53	48	44	44	44	43

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	215227	215227	215227
5°	208165	208442	208165
10°	189097	188835	187995
15°	160522	159969	158560
20°	129228	127505	126350
25°	99897	96914	96914
30°	74495	71989	71373
35°	53612	52940	51615
40°	37500	38579	36084
45°	27985	29519	27230
50°	24033	24033	23605
55°	22700	21739	22219
60°	23319	21149	22217
65°	25021	21150	24369
70°	29306	22206	28551
75°	36664	23023	35600
80°	46813	24993	42151
85°	37347	24898	37347

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 80°  
 Luminance: 46813 cd/sqm



TEST NUMBER: P1315949

CATALOG NUMBER: LDSQA3D20R359735D010 3LSQPHRLP1MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	111.0	10.7
10°-20°	247.7	24.0
20°-30°	236.6	22.9
30°-40°	158.9	15.4
40°-50°	93.3	9.0
50°-60°	66.7	6.5
60°-70°	55.5	5.4
70°-80°	45.5	4.4
80°-90°	18.8	1.8
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	595.3	57.6
0°-40°	754.2	72.9
0°-60°	914.2	88.4
0°-90°	1034.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1034.0	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1250	1250	1250	1250	1250	
5°	1204	1207	1206	1204	1204	111
15°	900	902	897	891	889	250
25°	526	519	510	510	510	241
35°	255	255	252	247	246	161
45°	115	118	121	115	112	92
55°	76	74	72	72	74	69
65°	61	55	52	55	60	61
75°	55	42	35	42	54	57
85°	19	20	13	20	19	21
90°	0	0	0	0	0	



TEST NUMBER: P1315949

CATALOG NUMBER: LDSQA3D20R359735D010 3LSQPHRLP1MW

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	1249.7	1249.7	1249.7	1249.7	1249.7
1°	1248.2	1249.7	1249.7	1248.2	1248.2
2°	1241.9	1245.0	1243.4	1241.9	1243.4
3°	1234.0	1237.2	1235.6	1234.0	1232.4
4°	1221.4	1224.6	1223.0	1219.8	1219.8
5°	1204.1	1207.2	1205.7	1204.1	1204.1
6°	1186.8	1189.9	1186.8	1183.6	1183.6
7°	1163.2	1167.9	1164.7	1161.6	1160.0
8°	1136.4	1141.1	1138.0	1136.4	1133.3
9°	1109.7	1112.8	1108.1	1108.1	1108.1
10°	1081.3	1082.9	1079.8	1075.0	1075.0
11°	1049.8	1048.3	1046.7	1043.6	1040.4
12°	1015.2	1015.2	1010.5	1007.4	1005.8
13°	979.0	977.4	974.3	971.1	971.1
14°	941.2	941.2	938.1	931.8	933.4
15°	900.3	901.9	897.2	890.9	889.3
17.5°	807.5	804.3	796.4	791.7	787.0
20°	705.1	703.6	695.7	691.0	689.4
22.5°	610.7	609.1	601.3	596.5	599.7
25°	525.7	519.4	510.0	510.0	510.0
27.5°	447.0	439.1	432.8	429.7	432.8
30°	374.6	368.3	362.0	360.4	358.9
32.5°	310.1	306.9	303.8	299.1	299.1
35°	255.0	255.0	251.8	247.1	245.5
37.5°	207.8	209.3	207.8	203.0	201.5
40°	166.8	170.0	171.6	166.8	160.5
42.5°	136.9	141.7	144.8	136.9	132.2
45°	114.9	118.0	121.2	114.9	111.8
47.5°	100.7	102.3	103.9	99.2	97.6
50°	89.7	89.7	89.7	88.1	88.1
52.5°	81.8	81.8	80.3	78.7	78.7
55°	75.6	74.0	72.4	72.4	74.0
57.5°	70.8	69.3	66.1	67.7	69.3
60°	67.7	64.5	61.4	63.0	64.5
62.5°	63.0	59.8	56.7	58.2	61.4
65°	61.4	55.1	51.9	55.1	59.8
67.5°	59.8	51.9	47.2	51.9	58.2
70°	58.2	48.8	44.1	48.8	56.7
72.5°	56.7	45.6	39.3	45.6	55.1
75°	55.1	42.5	34.6	42.5	53.5
77.5°	51.9	39.3	29.9	39.3	48.8
80°	47.2	36.2	25.2	34.6	42.5
82.5°	34.6	29.9	20.5	29.9	31.5
85°	18.9	20.5	12.6	20.5	18.9
87.5°	1.6	3.1	3.1	9.4	6.3



TEST NUMBER: P1315949  
CATALOG NUMBER: LDSQA3D20R359735D010 3LSQPHRLP1MW

**CANDELA DISTRIBUTION (continued):**

	0°	22.5°	45°	67.5°	90°
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)