

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P1317330

Luminaire Tested: LDSQA3D09R309827DE010 3LSQCA45R 1MMS

Issue Date: 1/29/2026

**Test Information**

Test Method: LM-79-2019  
Report Number: P1317330  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2510-583-76)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/29/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LDSQA3D09R309827DE010 3LSQCA45R 1MMS  
Description: 3in Adjustable LED luminaire with, R30 optic, 2700K CCT AND, 98CRI , 3LSQCA45R 1MMS TRII  
Light Source: -  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 604.0 lumens  
Efficiency: N/A  
Efficacy: 54.9 lumens/watt  
Spacing Criteria (0/90/45): 4.07 / 0.66 / 1.44  
Luminous Opening: Rectangular (W 0.25' x L: 0.25' x H: 0')  
CIE Type: Direct

Input Watts (W): 11  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1317330  
CATALOG NUMBER: LDSQA3D09R309827DE010 3LSQCA45R 1MMS

### Luminous Intensity Polar Plot

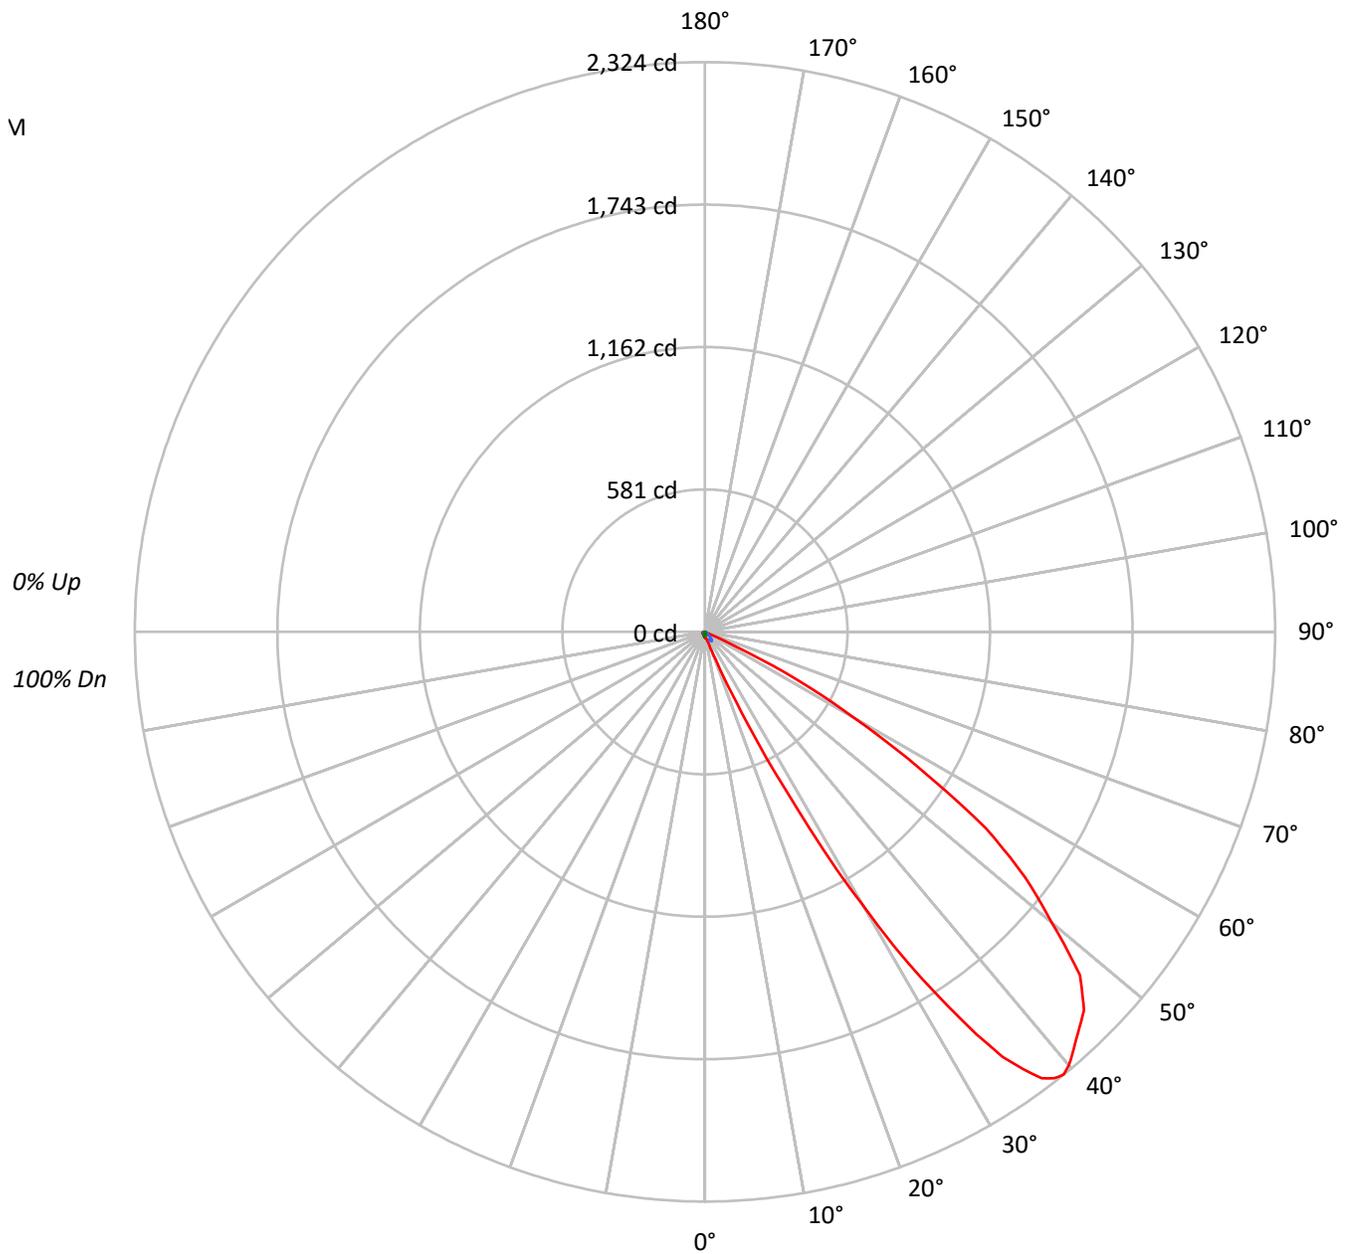

— 0°-180°    - - 45°-225°    - - - 90°-270°



TEST NUMBER: P1317330  
 CATALOG NUMBER: LDSQA3D09R309827DE010 3LSQCA45R 1MMS

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100	
1	110	106	102	99	108	104	100	97	100	97	94	96	93	91	92	90	89	87			87	
2	100	93	86	81	98	91	85	80	87	83	78	84	80	77	81	78	75	73			73	
3	91	81	73	67	89	79	72	66	76	70	65	74	68	64	71	67	63	61			61	
4	83	71	62	55	80	69	61	55	67	60	54	64	58	53	62	57	52	50			50	
5	75	62	52	46	73	60	52	45	58	51	45	56	50	44	54	49	44	42			42	
6	68	54	45	38	66	53	44	38	51	43	37	49	42	37	48	42	37	35			35	
7	62	48	38	32	60	47	38	32	45	37	31	44	36	31	42	36	31	29			29	
8	56	42	33	27	55	41	33	27	40	32	26	39	32	26	37	31	26	24			24	
9	52	37	29	23	50	37	28	23	36	28	22	34	27	22	33	27	22	20			20	
10	48	33	25	19	46	33	25	19	32	24	19	31	24	19	30	24	19	17			17	

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°	135°	180°
0°	4030	4030	4030	4030	4030
5°	4305	4218	3959	3613	3527
10°	4722	4180	3463	3113	3025
15°	6900	4172	2906	2639	2728
20°	17338	4564	2236	2236	2511
25°	80533	5701	1748	2033	2318
30°	256397	7895	1313	1929	2327
35°	444878	9629	1072	1808	2355
40°	518841	9600	809	1821	2406
45°	532105	6820	877	1973	2606
50°	494842	3805	670	2036	3001
55°	420576	1982	751	2282	3363
60°	242903	517	861	2446	3686
65°	49554	0	1019	2893	4157
70°	755	252	1259	3323	4884
75°	665	333	1331	3394	5723
80°	496	496	1984	4066	6546
85°	0	988	3952	3952	8102

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 532105 cd/sqm



TEST NUMBER: P1317330

CATALOG NUMBER: LDSQA3D09R309827DE010 3LSQCA45R 1MMS

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	2.1	0.4
10°-20°	6.1	1.0
20°-30°	34.8	5.8
30°-40°	162.7	26.9
40°-50°	230.1	38.1
50°-60°	141.5	23.4
60°-70°	21.6	3.6
70°-80°	3.4	0.6
80°-90°	1.7	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	43.0	7.1
0°-40°	205.7	34.1
0°-60°	577.3	95.6
0°-90°	604.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	604.0	100.0

**CANDELA DISTRIBUTION:**

	0°	45°	90°	135°	180°	Flux
0°	23	23	23	23	23	
5°	25	24	23	21	20	2
15°	39	23	16	15	15	14
25°	424	30	9	11	12	261
35°	2116	46	5	9	11	1270
45°	2185	28	4	8	11	1656
55°	1401	7	2	8	11	1192
65°	122	0	2	7	10	220
75°	1	0	2	5	9	1
85°	0	0	2	2	4	0
90°	0	0	0	0	0	



TEST NUMBER: P1317330  
 CATALOG NUMBER: LDSQA3D09R309827DE010 3LSQCA45R 1MMS

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	22.5°	45°	67.5°	90°	112.5°	135°
0°	23.4	23.4	23.4	23.4	23.4	23.4	23.4	23.4	23.4	23.4	23.4
2.5°	23.9	23.9	24.4	24.4	23.9	24.4	24.4	24.4	23.4	22.9	21.9
5°	24.9	24.9	24.9	25.4	24.9	24.9	24.4	23.9	22.9	21.4	20.9
7.5°	25.9	25.9	25.4	25.9	25.4	25.4	24.4	23.4	21.9	20.4	19.3
10°	27.0	27.0	26.5	26.5	25.9	25.9	23.9	22.4	19.8	18.3	17.8
12.5°	30.0	30.0	29.5	29.0	28.0	27.5	23.4	20.9	17.8	16.3	15.8
15°	38.7	38.2	37.1	35.6	33.1	32.6	23.4	19.3	16.3	14.8	14.8
17.5°	52.9	52.4	50.9	46.8	42.2	40.7	23.4	17.3	14.2	13.2	13.2
20°	94.6	90.6	82.9	72.8	62.1	56.5	24.9	15.3	12.2	11.7	12.2
21°	123.6	119.6	109.9	93.1	74.3	68.2	25.9	14.8	11.7	11.2	12.2
22°	168.4	163.8	144.0	121.1	94.1	83.4	26.5	13.7	10.7	10.7	11.7
23°	235.1	227.4	193.8	157.2	117.5	102.3	27.5	13.2	10.2	10.7	11.2
24°	307.8	301.2	263.0	208.1	150.1	128.2	28.5	12.7	9.7	9.7	10.7
25°	423.8	416.2	348.5	262.5	190.3	154.2	30.0	11.7	9.2	9.2	10.7
26°	573.9	538.8	448.7	338.3	234.5	193.3	31.5	11.2	8.6	9.2	10.2
27°	716.4	687.4	586.1	434.0	290.0	237.6	33.6	10.7	8.1	8.6	10.2
28°	903.6	862.9	735.2	549.0	365.3	287.5	35.6	10.2	7.6	8.6	9.7
29°	1113.2	1056.2	902.1	678.2	450.3	343.4	37.7	9.7	7.1	8.1	9.7
30°	1289.3	1235.8	1081.7	831.4	548.0	417.2	39.7	9.2	6.6	8.1	9.7
31°	1495.8	1414.9	1228.2	961.1	631.9	491.0	41.7	8.1	6.1	7.6	9.2
32°	1663.2	1606.7	1408.3	1107.6	742.3	572.4	43.2	7.6	6.1	7.6	9.2
33°	1825.0	1749.2	1557.4	1248.0	842.0	655.8	44.8	7.1	5.6	7.1	9.2
34°	1979.7	1910.0	1698.3	1361.5	936.2	735.2	45.8	6.1	5.6	7.1	8.6
35°	2116.0	2035.1	1822.5	1472.4	1032.8	807.4	45.8	5.6	5.1	6.6	8.6
36°	2204.6	2146.6	1930.3	1581.8	1120.3	876.1	45.8	5.1	4.6	6.6	8.1
37°	2280.4	2212.7	2016.8	1665.8	1185.0	931.1	45.8	4.6	4.6	6.6	8.1
38°	2311.4	2253.4	2076.3	1740.0	1245.5	987.0	45.3	4.1	4.1	6.1	8.1
39°	2323.6	2271.7	2121.1	1793.5	1290.3	1024.7	44.3	3.6	4.1	6.1	8.1
40°	2307.8	2268.7	2144.0	1828.1	1325.9	1052.2	42.7	3.1	3.6	6.1	8.1
42.5°	2242.7	2216.8	2138.9	1862.7	1356.4	1072.5	37.1	2.0	3.6	5.6	8.1
45°	2184.7	2156.2	2087.5	1826.5	1316.7	1032.3	28.0	1.0	3.6	5.6	8.1
47.5°	2072.3	2054.5	2000.5	1734.4	1229.7	941.8	19.8	0.5	3.1	5.1	7.6
50°	1846.9	1830.1	1758.9	1506.0	1057.8	796.2	14.2	0.5	2.5	5.1	7.6
52.5°	1644.9	1627.1	1524.8	1252.1	812.5	583.6	9.2	0.5	2.5	5.1	7.6
55°	1400.7	1369.6	1235.3	950.4	575.9	391.3	6.6	0.5	2.5	4.6	7.6
57.5°	1036.9	991.6	871.5	648.2	331.7	212.2	3.6	0.5	2.5	4.6	7.6
60°	705.2	678.2	545.4	341.9	141.4	89.5	1.5	0.5	2.5	4.6	7.1
62.5°	427.4	393.3	274.2	145.5	61.1	40.7	0.0	1.0	2.5	4.6	7.1
65°	121.6	107.9	71.7	33.1	17.3	13.2	0.0	1.0	2.5	4.6	7.1
67.5°	4.1	4.1	4.1	3.6	2.5	2.5	0.5	1.0	2.5	4.6	6.6
70°	1.5	1.5	1.5	1.0	1.0	0.5	0.5	1.0	2.5	4.1	6.6
72.5°	1.0	1.0	1.0	1.0	0.5	0.5	0.5	1.0	2.0	3.6	6.1
75°	1.0	1.0	1.0	0.5	0.5	0.5	0.5	1.5	2.0	3.6	5.1
77.5°	1.0	1.0	1.0	0.5	0.5	0.5	0.5	1.5	2.0	3.1	5.1
80°	0.5	0.5	0.5	0.5	0.5	0.5	0.5	1.5	2.0	3.1	4.1



TEST NUMBER: P1317330  
CATALOG NUMBER: LDSQA3D09R309827DE010 3LSQCA45R 1MMS

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	22.5°	45°	67.5°	90°	112.5°	135°
82.5°	0.5	0.5	0.5	0.0	0.0	0.0	0.5	1.5	2.0	2.0	3.1
85°	0.0	0.0	0.0	0.0	0.0	0.0	0.5	1.5	2.0	1.5	2.0
87.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.5	1.5	1.5	1.5	1.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1317330  
CATALOG NUMBER: LDSQA3D09R309827DE010 3LSQCA45R 1MMS

**CANDELA DISTRIBUTION (continued):**

	157.5°	180°
0°	23.4	23.4
2.5°	21.9	21.9
5°	20.4	20.4
7.5°	18.8	18.8
10°	17.3	17.3
12.5°	16.3	16.3
15°	14.8	15.3
17.5°	13.7	14.2
20°	13.2	13.7
21°	13.2	13.7
22°	12.7	13.2
23°	12.7	13.2
24°	12.2	12.7
25°	11.7	12.2
26°	11.7	12.2
27°	11.7	12.2
28°	11.2	12.2
29°	11.2	11.7
30°	11.2	11.7
31°	10.7	11.7
32°	10.7	11.7
33°	10.7	11.2
34°	10.2	11.2
35°	10.2	11.2
36°	10.2	11.2
37°	10.2	10.7
38°	10.2	11.2
39°	10.2	10.7
40°	10.2	10.7
42.5°	10.2	10.7
45°	10.2	10.7
47.5°	10.2	11.2
50°	10.2	11.2
52.5°	10.2	11.2
55°	10.2	11.2
57.5°	10.2	10.7
60°	10.2	10.7
62.5°	9.7	10.7
65°	9.7	10.2
67.5°	9.7	10.2
70°	9.2	9.7
72.5°	8.6	9.2
75°	7.6	8.6
77.5°	7.1	7.6
80°	6.1	6.6



TEST NUMBER: P1317330  
CATALOG NUMBER: LDSQA3D09R309827DE010 3LSQCA45R 1MMS

**CANDELA DISTRIBUTION (continued):**

	157.5°	180°
82.5°	5.1	5.1
85°	3.6	4.1
87.5°	2.0	2.0
90°	0.0	0.0

(END OF REPORT)