

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P1318795

Luminaire Tested: LDSQA3D02R309835DE010 3LSQPHR1MB

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1318795
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2510-583-4)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LDSQA3D02R309835DE010 3LSQPHR1MB
Description: 3in Adjustable LED luminaire with, R30 optic, 3500K CCT AND, 98CRI , 3LSQPHR1MB TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 216.0 lumens
Efficiency: N/A
Efficacy: 60.0 lumens/watt
Spacing Criteria (0/90/45): 0.5 / 0.49 / 0.46
Luminous Opening: Rectangular (W 0.25' x L: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 3.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1318795
CATALOG NUMBER: LDSQA3D02R309835DE010 3LSQPHR1MB

Luminous Intensity Polar Plot

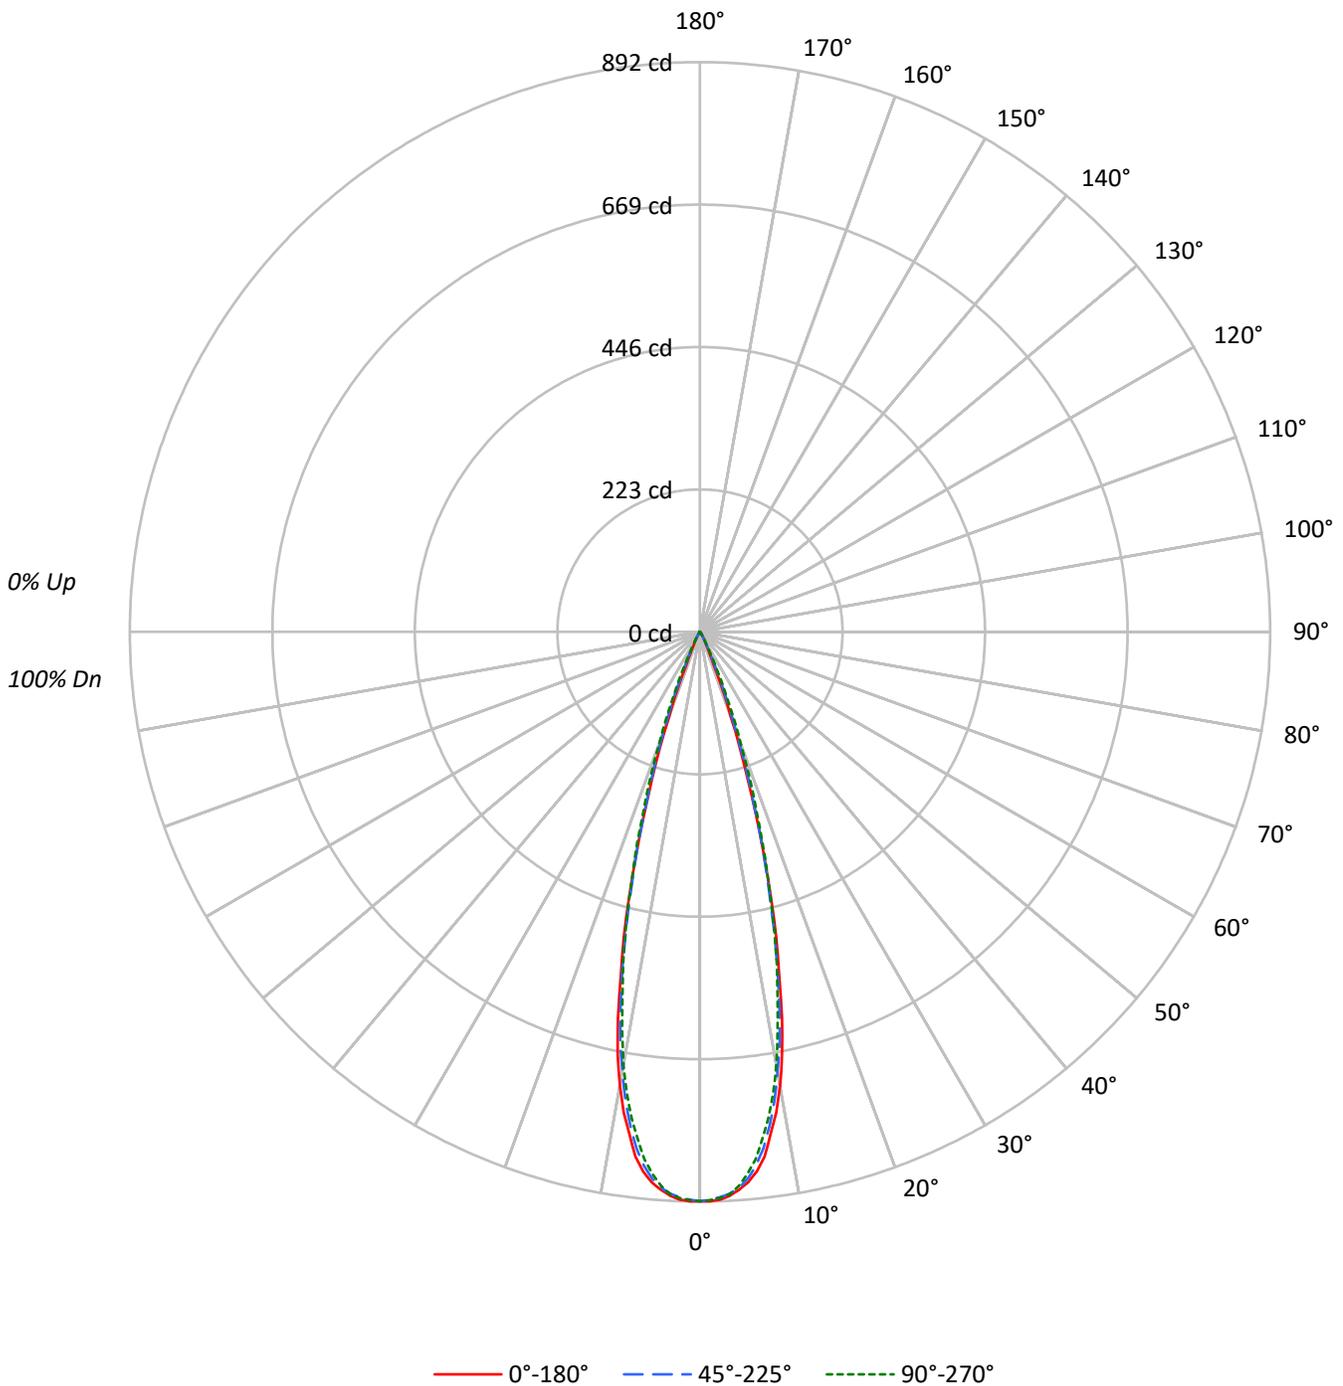



TEST NUMBER: P1318795
 CATALOG NUMBER: LDSQA3D02R309835DE010 3LSQPHR1MB

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	102	102	102	100
1	115	113	111	110	113	111	109	108	107	106	105	103	103	102	100	99	99	99	99	99	97
2	112	108	105	103	110	107	104	102	104	101	100	101	99	98	98	97	96	96	96	96	94
3	108	104	101	98	107	103	100	97	100	98	96	98	96	94	96	94	93	96	94	93	92
4	105	100	97	94	104	99	96	93	97	94	92	95	93	91	94	92	90	94	92	90	89
5	102	97	93	90	101	96	93	90	95	91	89	93	90	88	92	89	88	92	89	88	87
6	100	94	90	87	99	93	90	87	92	89	86	91	88	86	90	87	85	90	87	85	84
7	97	91	87	84	96	91	87	84	89	86	84	88	86	83	88	85	83	88	85	83	82
8	95	89	85	82	94	88	84	82	87	84	82	86	83	81	86	83	81	86	83	81	80
9	92	86	82	80	92	86	82	80	85	82	79	84	81	79	84	81	79	84	81	79	78
10	90	84	80	78	90	84	80	78	83	80	77	82	79	77	82	79	77	82	79	77	76

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	153519	153519	153519
5°	149576	148539	147311
10°	126228	122346	120370
15°	76062	73940	75295
20°	25805	29801	34364
25°	4751	7430	8779
30°	1631	1810	2028
35°	463	589	631
40°	135	202	157
45°	49	49	49
50°	54	0	54
55°	0	0	0
60°	0	0	0
65°	0	0	0
70°	0	0	0
75°	0	0	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 52.5°
 Luminance: 57 cd/sqm



TEST NUMBER: P1318795

CATALOG NUMBER: LDSQA3D02R309835DE010 3LSQPHR1MB

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	77.1	35.7
10°-20°	112.7	52.2
20°-30°	23.8	11.0
30°-40°	2.2	1.0
40°-50°	0.2	0.1
50°-60°	0.0	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	213.6	98.9
0°-40°	215.8	99.9
0°-60°	216.0	100.0
0°-90°	216.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	216.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	891	891	891	891	891	
5°	865	864	859	857	852	78
15°	427	425	415	424	422	113
25°	25	28	39	46	46	18
35°	2	3	3	3	3	2
45°	0	0	0	0	0	0
55°	0	0	0	0	0	0
65°	0	0	0	0	0	0
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	0



TEST NUMBER: P1318795
 CATALOG NUMBER: LDSQA3D02R309835DE010 3LSQPHR1MB

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	891.4	891.4	891.4	891.4	891.4
1°	891.6	890.7	889.4	891.3	890.0
2°	889.8	887.5	885.7	887.5	887.0
3°	884.2	882.3	881.0	881.9	881.9
4°	875.8	873.7	872.6	872.8	870.0
5°	865.2	863.5	859.2	856.6	852.1
6°	849.5	845.4	840.2	835.9	830.2
7°	828.3	822.0	814.5	807.1	799.8
8°	794.2	791.3	781.2	776.2	768.9
9°	762.2	754.9	744.1	735.9	732.0
10°	721.8	711.0	699.6	693.1	688.3
11°	673.9	662.9	653.8	644.3	636.9
12°	617.7	608.4	598.0	591.6	582.9
13°	551.0	549.7	538.0	535.9	534.8
14°	493.9	488.6	477.1	480.3	481.0
15°	426.6	425.1	414.7	424.4	422.3
17.5°	267.2	267.8	274.3	289.6	294.4
20°	140.8	145.1	162.6	181.0	187.5
22.5°	57.0	66.5	84.4	96.8	105.2
25°	25.0	27.9	39.1	46.0	46.2
27.5°	14.2	14.3	18.8	19.6	19.9
30°	8.2	8.4	9.1	9.7	10.2
32.5°	4.5	4.8	5.0	5.8	5.8
35°	2.2	2.8	2.8	3.4	3.0
37.5°	1.3	1.5	1.7	1.7	1.5
40°	0.6	0.7	0.9	0.9	0.7
42.5°	0.2	0.4	0.4	0.4	0.6
45°	0.2	0.2	0.2	0.2	0.2
47.5°	0.2	0.2	0.0	0.2	0.2
50°	0.2	0.0	0.0	0.0	0.2
52.5°	0.2	0.0	0.0	0.0	0.2
55°	0.0	0.0	0.0	0.0	0.0
57.5°	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0
62.5°	0.0	0.0	0.0	0.0	0.0
65°	0.0	0.0	0.0	0.0	0.0
67.5°	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1318795
CATALOG NUMBER: LDSQA3D02R309835DE010 3LSQPHR1MB

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)