

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P1319656

Luminaire Tested: LDSQA3D02R259840DE010 3LSQPHR1MW

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1319656
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2510-583-3)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LDSQA3D02R259840DE010 3LSQPHR1MW
Description: 3in Adjustable LED luminaire with, R25 optic, 4000K CCT AND, 98CRI , 3LSQPHR1MW TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 213.0 lumens
Efficiency: N/A
Efficacy: 59.2 lumens/watt
Spacing Criteria (0/90/45): 0.43 / 0.43 / 0.4
Luminous Opening: Rectangular (W 0.25' x L: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 3.6
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1319656
CATALOG NUMBER: LDSQA3D02R259840DE010 3LSQPHR1MW

Luminous Intensity Polar Plot

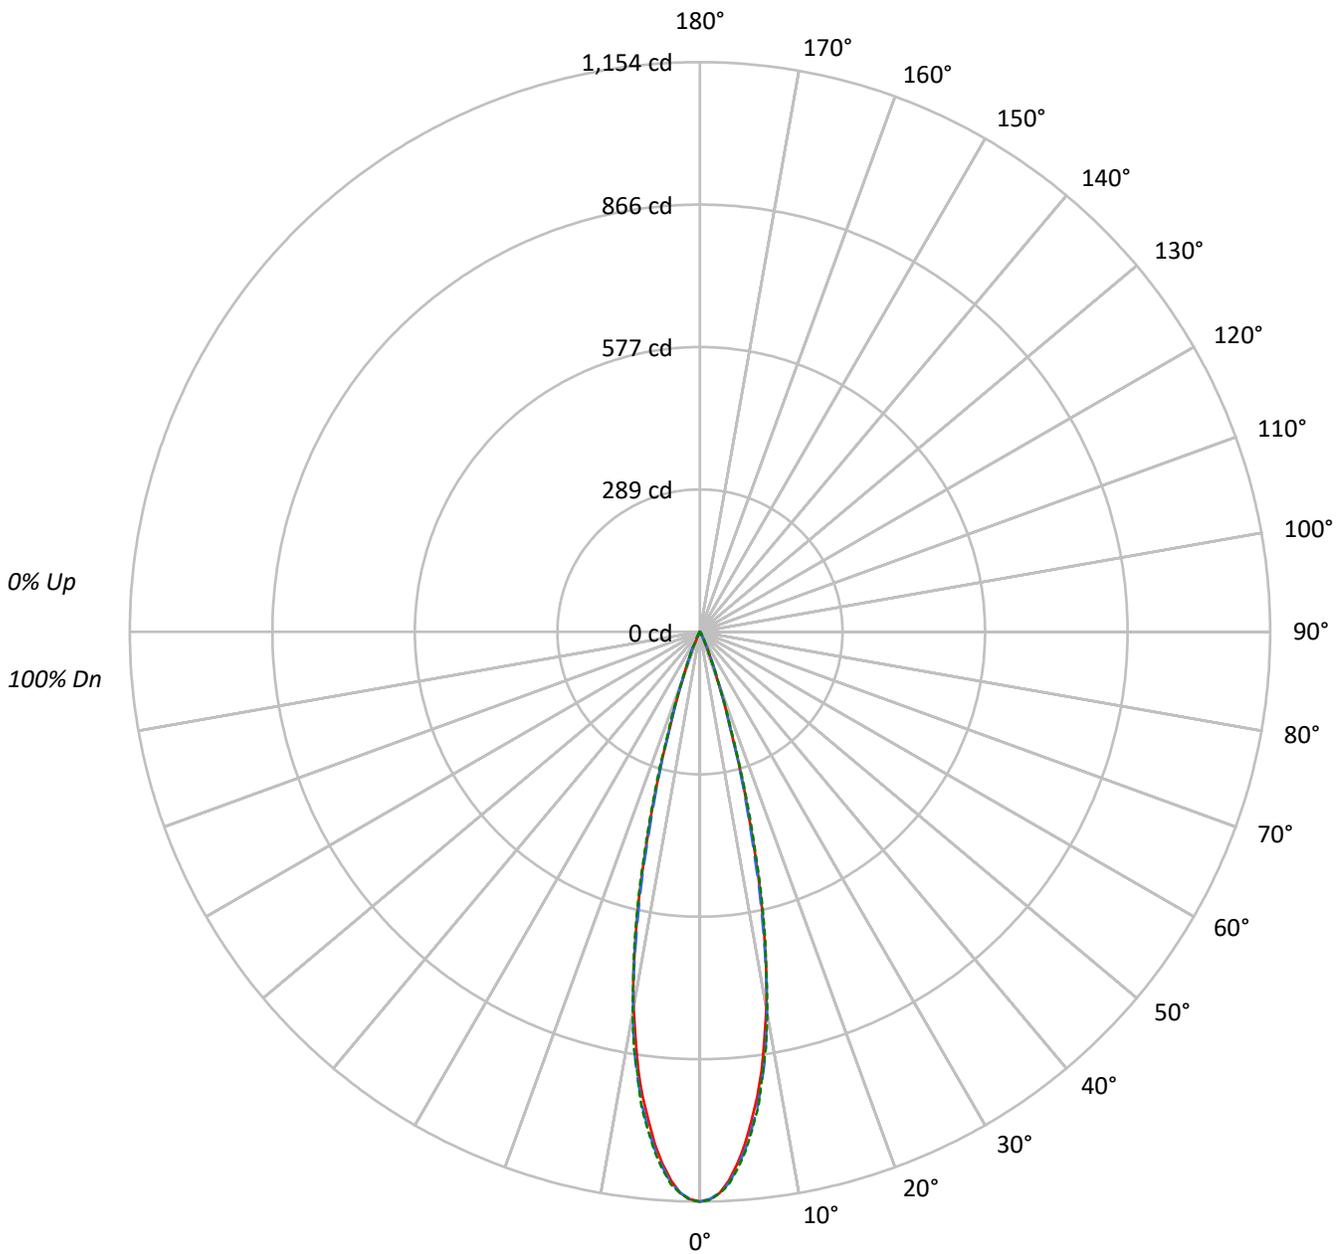

— 0°-180° - - 45°-225° - · - · 90°-270°



TEST NUMBER: P1319656

CATALOG NUMBER: LDSQA3D02R259840DE010 3LSQPHR1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	102	102	102	100
1	115	113	112	110	113	111	110	108	107	106	105	104	103	102	100	100	99	99	99	99	97
2	112	109	106	104	110	107	105	103	104	102	101	101	100	98	99	97	96	96	96	96	95
3	109	105	102	99	107	104	101	98	101	99	97	99	97	95	97	95	94	94	94	94	93
4	106	101	98	95	105	100	97	95	99	96	94	97	94	93	95	93	92	92	92	92	91
5	104	98	95	92	102	98	94	92	96	93	91	95	92	90	93	91	89	89	89	89	88
6	101	96	92	89	100	95	92	89	94	91	89	93	90	88	91	89	87	87	87	87	86
7	99	93	89	87	98	93	89	87	92	89	86	91	88	86	90	87	86	86	86	86	85
8	97	91	87	85	96	90	87	85	90	86	84	89	86	84	88	85	84	84	84	84	83
9	95	89	85	83	94	88	85	83	88	85	82	87	84	82	86	84	82	82	82	82	81
10	93	87	83	81	92	86	83	81	86	83	81	85	82	80	85	82	80	80	80	80	80

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	198762	198762	198762
5°	180124	181767	182648
10°	135409	136371	137001
15°	67040	65043	69376
20°	18932	19244	19464
25°	3287	6214	3896
30°	1293	1313	1352
35°	399	442	442
40°	135	180	135
45°	97	49	97
50°	54	0	54
55°	60	0	60
60°	0	0	0
65°	0	0	0
70°	0	0	0
75°	0	0	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 97 cd/sqm



TEST NUMBER: P1319656

CATALOG NUMBER: LDSQA3D02R259840DE010 3LSQPHR1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	91.7	43.0
10°-20°	103.4	48.5
20°-30°	16.0	7.5
30°-40°	1.6	0.8
40°-50°	0.2	0.1
50°-60°	0.0	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	211.1	99.1
0°-40°	212.7	99.9
0°-60°	213.0	100.0
0°-90°	213.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	213.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1154	1154	1154	1154	1154	
5°	1042	1044	1051	1056	1056	91
15°	376	373	365	381	389	103
25°	17	26	33	25	20	15
35°	2	2	2	2	2	2
45°	0	0	0	0	0	0
55°	0	0	0	0	0	0
65°	0	0	0	0	0	0
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	0



TEST NUMBER: P1319656
 CATALOG NUMBER: LDSQA3D02R259840DE010 3LSQPHR1MW

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1154.1	1154.1	1154.1	1154.1	1154.1
1°	1149.4	1150.9	1149.2	1151.1	1150.9
2°	1137.4	1139.0	1136.9	1138.0	1138.0
3°	1112.9	1116.2	1118.1	1119.4	1120.5
4°	1080.6	1084.3	1087.1	1090.5	1090.5
5°	1041.9	1043.8	1051.4	1055.6	1056.5
6°	995.8	1003.3	1009.0	1017.4	1012.3
7°	949.6	955.9	963.8	965.2	968.8
8°	897.2	903.8	911.2	909.9	906.9
9°	833.4	843.1	851.8	848.9	852.7
10°	774.3	780.2	779.8	777.0	783.4
11°	705.7	707.1	699.7	711.3	704.2
12°	624.5	625.6	616.1	627.5	634.7
13°	546.6	543.9	530.8	545.8	554.9
14°	456.9	457.9	441.2	470.2	468.0
15°	376.0	373.4	364.8	381.2	389.1
17.5°	200.4	202.1	200.0	208.2	213.3
20°	103.3	106.2	105.0	108.4	106.2
22.5°	53.6	57.5	58.7	56.0	48.8
25°	17.3	25.6	32.7	24.9	20.5
27.5°	10.4	10.3	16.0	11.0	11.2
30°	6.5	6.3	6.6	6.6	6.8
32.5°	3.6	3.8	3.6	4.0	3.8
35°	1.9	2.1	2.1	2.3	2.1
37.5°	1.1	1.3	1.3	1.3	1.1
40°	0.6	0.8	0.8	0.6	0.6
42.5°	0.4	0.4	0.4	0.4	0.4
45°	0.4	0.2	0.2	0.2	0.4
47.5°	0.2	0.2	0.0	0.2	0.2
50°	0.2	0.2	0.0	0.2	0.2
52.5°	0.2	0.0	0.0	0.0	0.2
55°	0.2	0.0	0.0	0.0	0.2
57.5°	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0
62.5°	0.0	0.0	0.0	0.0	0.0
65°	0.0	0.0	0.0	0.0	0.0
67.5°	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1319656
CATALOG NUMBER: LDSQA3D02R259840DE010 3LSQPHR1MW

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)