

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P1319963

Luminaire Tested: LDSQA3D09R309840DE010 3LSQPHR1MB

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1319963
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2510-583-4)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LDSQA3D09R309840DE010 3LSQPHR1MB
Description: 3in Adjustable LED luminaire with, R30 optic, 4000K CCT AND, 98CRI , 3LSQPHR1MB TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 673.0 lumens
Efficiency: N/A
Efficacy: 61.2 lumens/watt
Spacing Criteria (0/90/45): 0.5 / 0.49 / 0.46
Luminous Opening: Rectangular (W 0.25' x L: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 11
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1319963

CATALOG NUMBER: LDSQA3D09R309840DE010 3LSQPHR1MB

Luminous Intensity Polar Plot

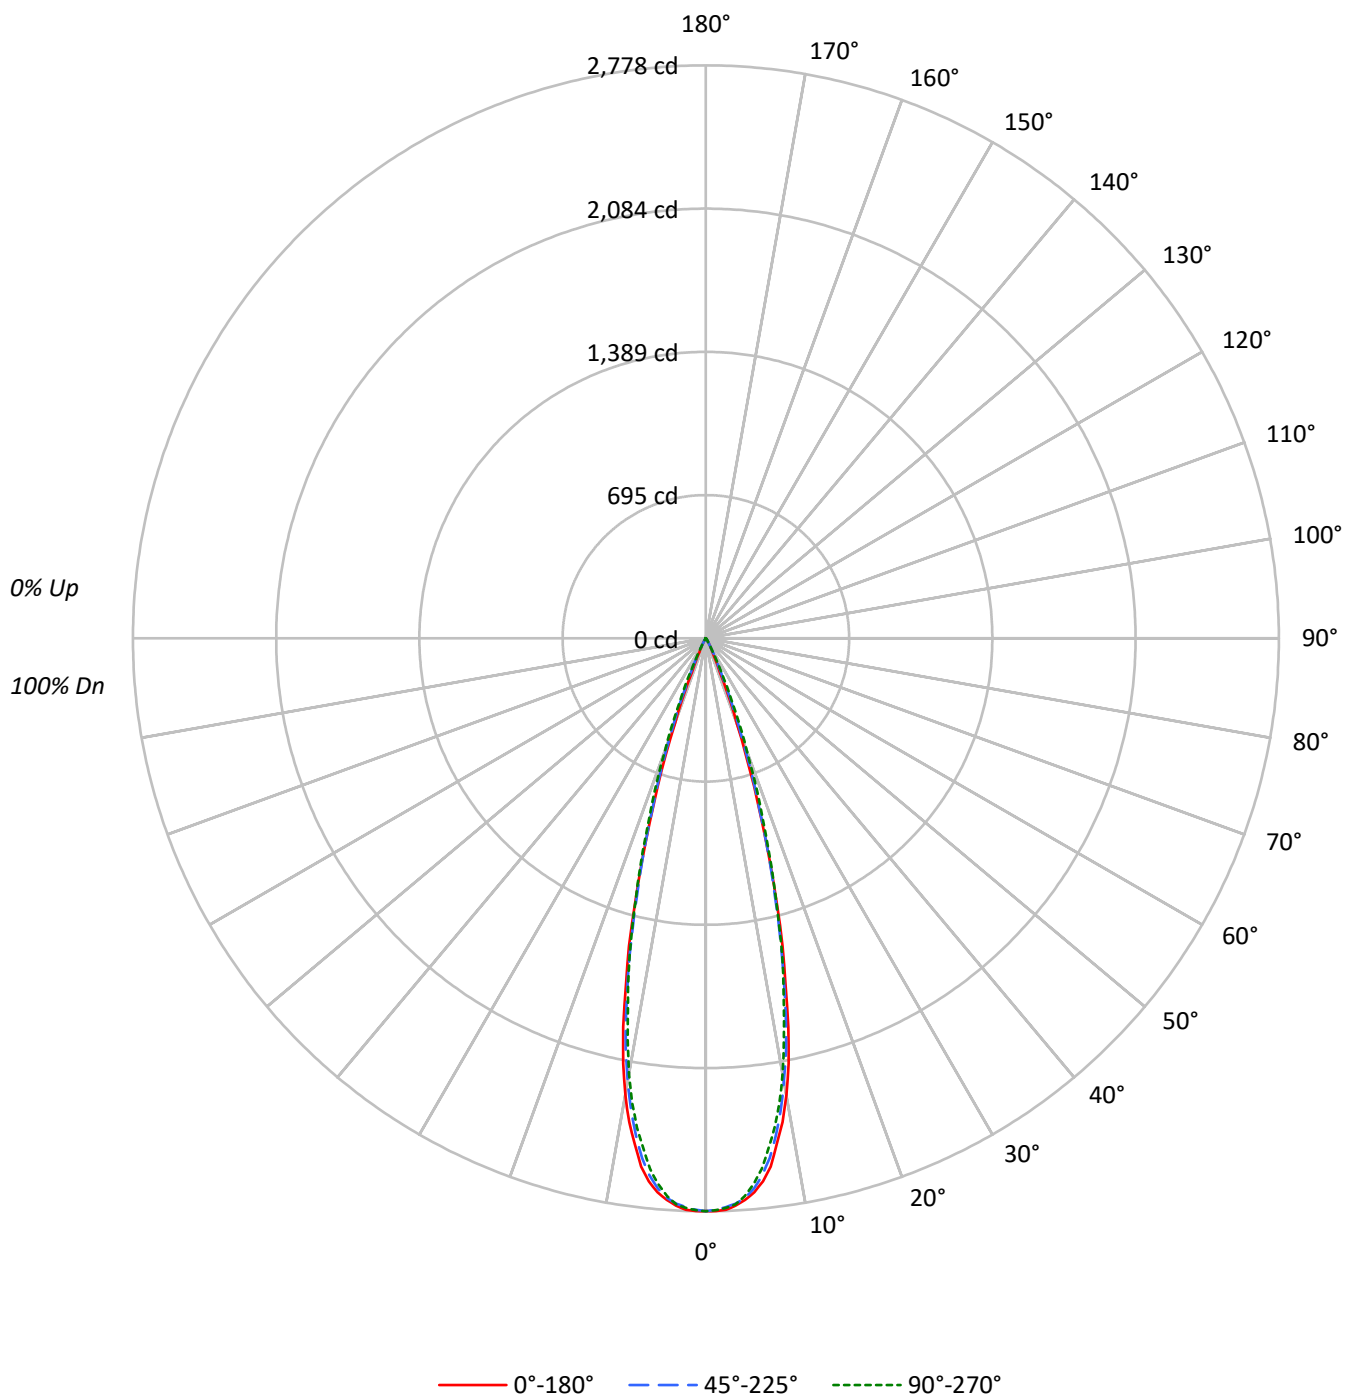

TEST NUMBER: P1319963

CATALOG NUMBER: LDSQA3D09R309840DE010 3LSQPHR1MB

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	115	113	111	110	113	111	109	108	107	106	105		103	103	102		100
2	112	108	105	103	110	107	104	102	104	101	100		101	99	98		98
3	108	104	101	98	107	103	100	97	100	98	96		98	96	94		96
4	105	100	97	94	104	99	96	93	97	94	92		95	93	91		94
5	102	97	93	90	101	96	93	90	95	91	89		93	90	88		92
6	100	94	90	87	99	93	90	87	92	89	86		91	88	86		90
7	97	91	87	84	96	91	87	84	90	86	84		88	86	83		88
8	95	89	85	82	94	88	84	82	87	84	82		86	83	81		86
9	92	86	82	80	92	86	82	80	85	82	79		84	81	79		84
10	90	84	80	78	90	84	80	78	83	80	77		82	79	77		82

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	478348	478348	478348
5°	466034	462818	459015
10°	393286	381220	375029
15°	237012	230379	234622
20°	80385	92829	107088
25°	14765	23145	27345
30°	5071	5648	6344
35°	1472	1829	1955
40°	382	652	517
45°	146	146	146
50°	161	0	161
55°	0	0	0
60°	0	0	0
65°	0	0	0
70°	0	0	0
75°	0	0	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 52.5°

Luminance: 170 cd/sqm

TEST NUMBER: P1319963

CATALOG NUMBER: LDSQA3D09R309840DE010 3LSQPHR1MB

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	240.2	35.7
10°-20°	351.0	52.2
20°-30°	74.3	11.0
30°-40°	6.8	1.0
40°-50°	0.7	0.1
50°-60°	0.0	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	665.4	98.9
0°-40°	672.3	99.9
0°-60°	673.0	100.0
0°-90°	673.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	673.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2778	2778	2778	2778	2778	
5°	2696	2690	2677	2669	2655	243
15°	1329	1325	1292	1322	1316	351
25°	78	87	122	143	144	57
35°	7	9	9	10	9	6
45°	1	1	1	1	1	1
55°	0	0	0	0	0	0
65°	0	0	0	0	0	0
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	0

TEST NUMBER: P1319963

CATALOG NUMBER: LDSQA3D09R309840DE010 3LSQPHR1MB

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2777.5	2777.5	2777.5	2777.5	2777.5
1°	2778.1	2775.2	2771.1	2776.9	2772.9
2°	2772.3	2765.3	2759.5	2765.3	2763.6
3°	2754.9	2749.1	2745.0	2747.9	2747.9
4°	2728.8	2722.4	2718.9	2719.5	2710.8
5°	2695.7	2690.5	2677.1	2669.0	2655.1
6°	2646.9	2634.2	2617.9	2604.6	2586.6
7°	2580.8	2561.1	2537.9	2514.7	2492.0
8°	2474.6	2465.3	2434.0	2418.3	2395.7
9°	2374.8	2352.2	2318.5	2293.0	2280.8
10°	2248.9	2215.3	2179.9	2159.6	2144.5
11°	2099.8	2065.6	2037.1	2007.6	1984.3
12°	1924.6	1895.6	1863.1	1843.3	1816.1
13°	1716.9	1712.8	1676.2	1669.9	1666.4
14°	1538.7	1522.5	1486.5	1496.4	1498.7
15°	1329.3	1324.6	1292.1	1322.3	1315.9
17.5°	832.6	834.4	854.7	902.2	917.3
20°	438.6	452.0	506.5	564.0	584.3
22.5°	177.5	207.1	262.8	301.7	327.8
25°	77.7	87.0	121.8	143.3	143.9
27.5°	44.1	44.7	58.6	60.9	62.1
30°	25.5	26.1	28.4	30.2	31.9
32.5°	13.9	15.1	15.7	18.0	18.0
35°	7.0	8.7	8.7	10.4	9.3
37.5°	4.1	4.6	5.2	5.2	4.6
40°	1.7	2.3	2.9	2.9	2.3
42.5°	0.6	1.2	1.2	1.2	1.7
45°	0.6	0.6	0.6	0.6	0.6
47.5°	0.6	0.6	0.0	0.6	0.6
50°	0.6	0.0	0.0	0.0	0.6
52.5°	0.6	0.0	0.0	0.0	0.6
55°	0.0	0.0	0.0	0.0	0.0
57.5°	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0
62.5°	0.0	0.0	0.0	0.0	0.0
65°	0.0	0.0	0.0	0.0	0.0
67.5°	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1319963

CATALOG NUMBER: LDSQA3D09R309840DE010 3LSQPHR1MB

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)