

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P1323507

Luminaire Tested: LDSQA3D02R459030D2WDE010 3LSQCDR1MB

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1323507
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2510-583-32)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LDSQA3D02R459030D2WDE010 3LSQCDR1MB
Description: 3in Adjustable Dim to Warm LED luminaire with, R45 optic, 3000K CCT AND, 90CRI ,
3LSQCDR1MB TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 438.0 lumens
Efficiency: N/A
Efficacy: 60.8 lumens/watt
Spacing Criteria (0/90/45): 0.72 / 0.74 / 0.67
Luminous Opening: Rectangular (W 0.25' x L: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1323507
CATALOG NUMBER: LDSQA3D02R459030D2WDE010 3LSQCDR1MB

Luminous Intensity Polar Plot

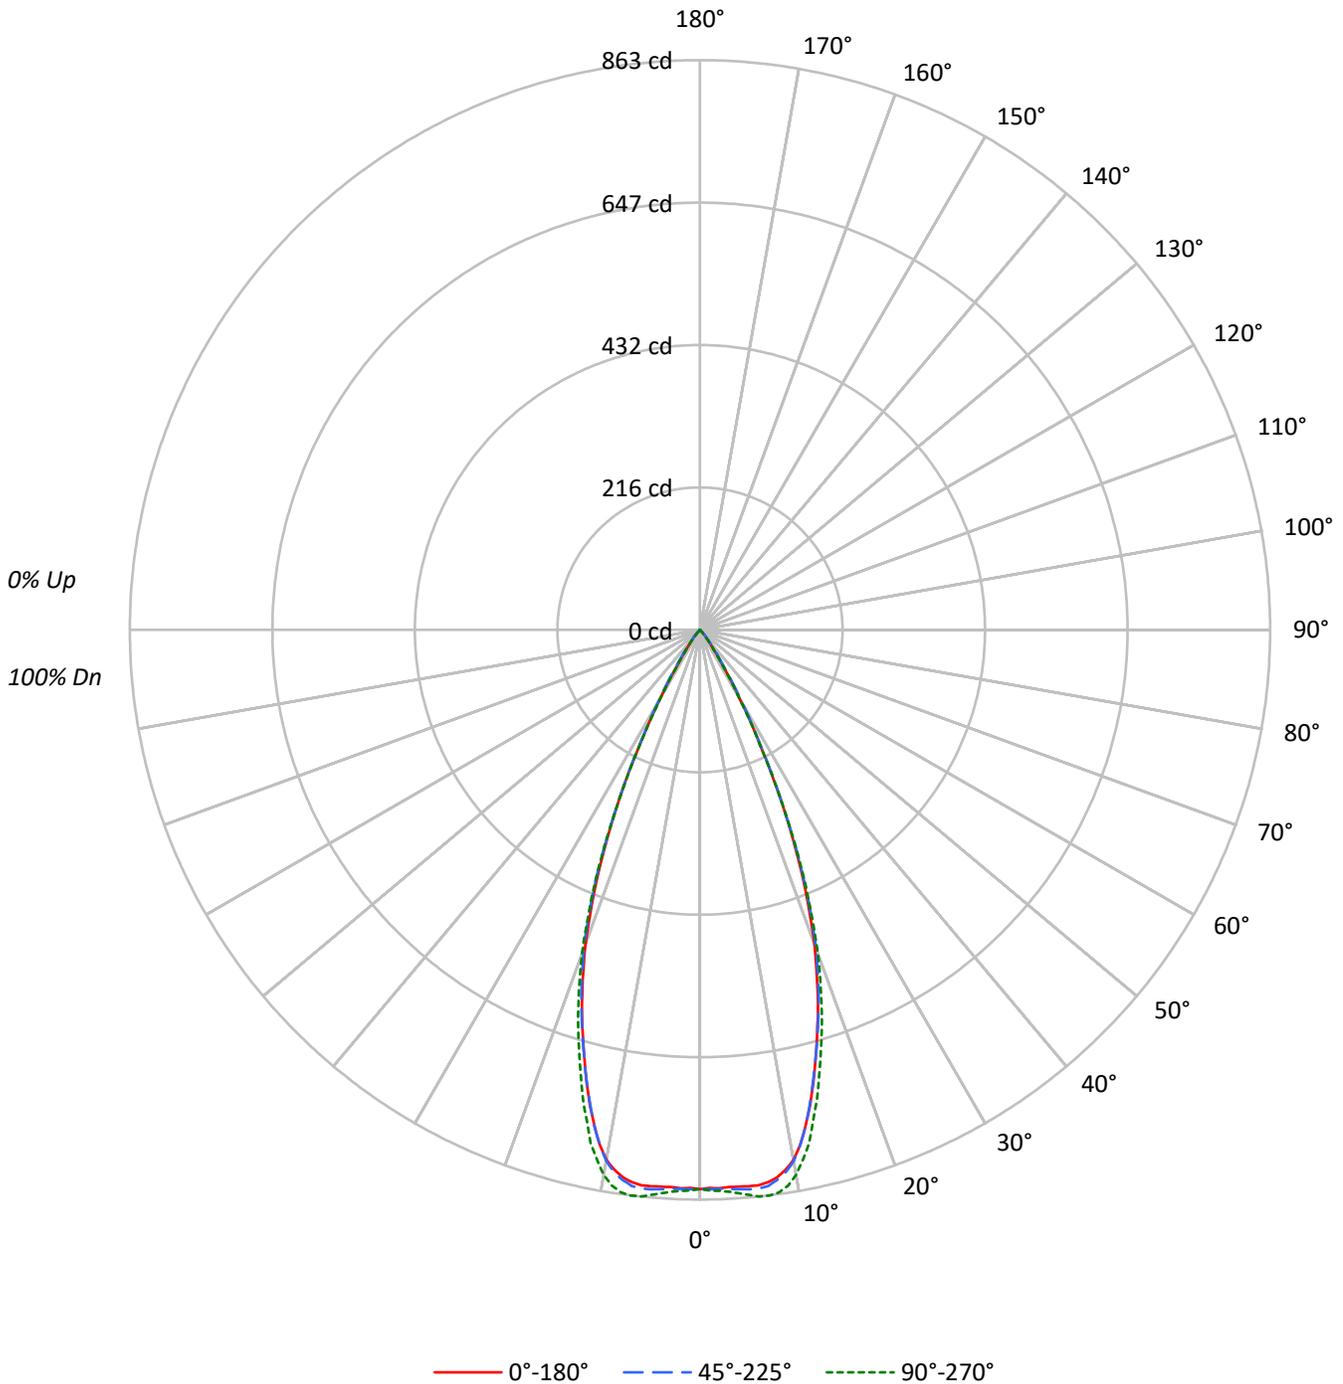



TEST NUMBER: P1323507

CATALOG NUMBER: LDSQA3D02R459030D2WDE010 3LSQCDR1MB

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20
RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	102	102	102	100
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	97	97	97	95
2	110	106	103	100	108	104	101	99	101	99	96	98	96	94	95	94	92	92	92	92	91
3	106	100	96	93	104	99	95	92	97	93	91	94	92	89	92	90	88	92	90	88	87
4	102	95	91	87	100	94	90	87	92	89	86	90	87	85	89	86	84	89	86	84	83
5	98	91	86	83	96	90	86	82	88	85	82	87	83	81	85	82	80	85	82	80	79
6	94	87	82	78	93	86	81	78	85	81	78	83	80	77	82	79	77	82	79	77	75
7	91	83	78	75	89	82	78	74	81	77	74	80	76	74	79	76	73	79	76	73	72
8	87	79	75	71	86	79	74	71	78	74	71	77	73	70	76	73	70	76	73	70	69
9	84	76	71	68	83	76	71	68	75	71	68	74	70	68	73	70	67	73	70	67	66
10	81	73	68	65	80	73	68	65	72	68	65	71	67	65	71	67	65	71	67	65	64

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	145907	145907	145907
5°	146240	147069	148539
10°	142579	142859	146619
15°	120280	120333	124292
20°	92847	94167	95706
25°	57597	57654	58034
30°	23764	25256	23367
35°	7401	9041	7127
40°	2271	3147	2113
45°	170	1193	170
50°	0	188	0
55°	0	0	0
60°	0	0	0
65°	0	0	0
70°	0	0	0
75°	0	0	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 45°
 Vertical Angle: 45°
 Luminance: 1193 cd/sqm



TEST NUMBER: P1323507

CATALOG NUMBER: LDSQA3D02R459030D2WDE010 3LSQCDR1MB

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	80.6	18.4
10°-20°	187.5	42.8
20°-30°	137.5	31.4
30°-40°	29.6	6.7
40°-50°	2.8	0.6
50°-60°	0.0	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	405.6	92.6
0°-40°	435.2	99.4
0°-60°	438.0	100.0
0°-90°	438.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	438.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	847	847	847	847	847	
5°	846	848	851	857	859	80
15°	675	673	675	686	697	186
25°	303	302	303	303	305	136
35°	35	38	43	37	34	28
45°	1	2	5	2	1	2
55°	0	0	0	0	0	0
65°	0	0	0	0	0	0
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	0



TEST NUMBER: P1323507

CATALOG NUMBER: LDSQA3D02R459030D2WDE010 3LSQCDR1MB

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	847.2	847.2	847.2	847.2	847.2
1°	845.5	847.5	847.5	848.8	849.4
2°	846.2	847.5	847.2	849.4	850.4
3°	845.2	847.5	848.1	850.7	852.4
4°	845.5	847.5	849.4	853.4	855.6
5°	845.9	848.1	850.7	856.6	859.2
6°	846.2	847.8	850.7	858.2	863.1
7°	842.9	845.2	848.5	857.9	863.1
8°	837.7	839.0	841.6	854.0	860.2
9°	828.0	827.6	831.5	845.2	852.4
10°	815.3	811.4	816.9	830.6	838.4
11°	794.7	790.5	795.4	810.1	817.5
12°	768.1	768.1	769.0	782.1	795.1
13°	739.7	736.5	738.4	753.1	762.2
14°	708.5	705.2	707.2	718.2	732.6
15°	674.6	673.3	674.9	685.7	697.1
17.5°	594.2	591.3	597.1	607.9	613.7
20°	506.6	511.5	513.8	520.6	522.2
22.5°	406.0	411.2	414.5	415.4	416.4
25°	303.1	302.1	303.4	303.4	305.4
27.5°	199.3	199.3	202.8	200.6	198.3
30°	119.5	124.4	127.0	122.7	117.5
32.5°	65.1	70.0	74.2	68.0	63.5
35°	35.2	37.8	43.0	36.8	33.9
37.5°	19.2	21.5	24.7	20.8	19.2
40°	10.1	12.4	14.0	12.4	9.4
42.5°	3.3	6.2	8.1	6.2	2.9
45°	0.7	2.0	4.9	2.0	0.7
47.5°	0.0	0.3	2.3	0.3	0.0
50°	0.0	0.0	0.7	0.0	0.0
52.5°	0.0	0.0	0.0	0.0	0.0
55°	0.0	0.0	0.0	0.0	0.0
57.5°	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0
62.5°	0.0	0.0	0.0	0.0	0.0
65°	0.0	0.0	0.0	0.0	0.0
67.5°	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1323507
CATALOG NUMBER: LDSQA3D02R459030D2WDE010 3LSQCDR1MB

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)