

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P1323517

Luminaire Tested: LDSQA3D02R509030D2WDE010 3LSQCDR1MMS

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1323517
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2510-583-27)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LDSQA3D02R509030D2WDE010 3LSQCDR1MMS
Description: 3in Adjustable Dim to Warm LED luminaire with, R50 optic, 3000K CCT AND, 90CRI ,
3LSQCDR1MMS TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 455.0 lumens
Efficiency: N/A
Efficacy: 63.2 lumens/watt
Spacing Criteria (0/90/45): 0.85 / 0.85 / 0.78
Luminous Opening: Rectangular (W 0.25' x L: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1323517

CATALOG NUMBER: LDSQA3D02R509030D2WDE010 3LSQCDR1MMS

Luminous Intensity Polar Plot

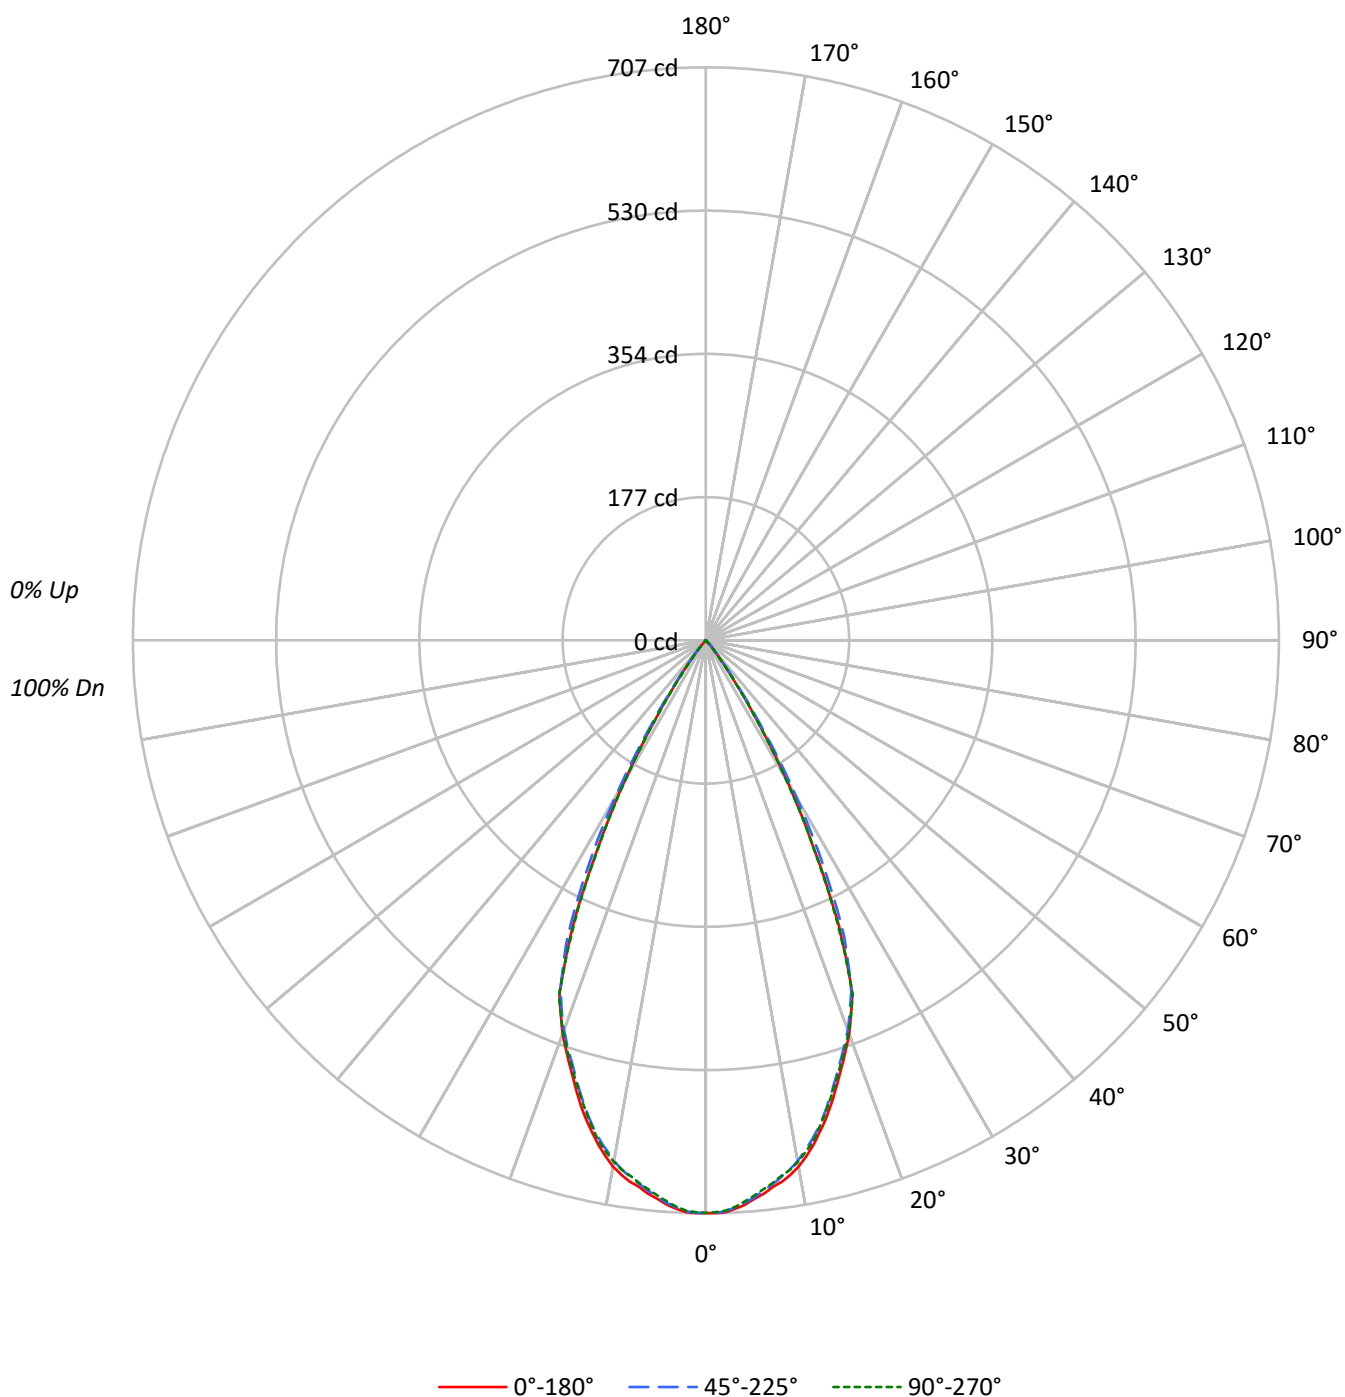

TEST NUMBER: P1323517

CATALOG NUMBER: LDSQA3D02R509030D2WDE010 3LSQCDR1MMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	112	109	107	112	110	108	106	106	104	102		102	101	99		98
2	109	105	101	98	107	103	100	97	100	98	95		97	95	93		95
3	105	99	95	91	103	98	94	90	95	92	89		93	90	88		91
4	100	94	89	85	99	93	88	85	90	87	84		89	85	83		87
5	96	89	84	80	95	88	83	79	86	82	79		85	81	78		83
6	92	84	79	75	91	83	79	75	82	78	74		81	77	74		79
7	88	80	75	71	87	79	74	71	78	74	70		77	73	70		76
8	85	76	71	67	83	76	71	67	75	70	67		74	70	67		73
9	81	73	67	64	80	72	67	64	71	67	64		70	66	63		70
10	78	69	64	61	77	69	64	61	68	64	60		67	63	60		67

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	121693	121693	121693
5°	119564	119236	118890
10°	115316	114056	114284
15°	106069	104750	105035
20°	94717	93819	94369
25°	73711	76809	72913
30°	39932	44586	39216
35°	12594	14990	12320
40°	2788	3867	2630
45°	73	1193	73
50°	0	188	0
55°	0	0	0
60°	0	0	0
65°	0	0	0
70°	0	0	0
75°	0	0	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 45°

Vertical Angle: 45°

Luminance: 1193 cd/sqm

TEST NUMBER: P1323517

CATALOG NUMBER: LDSQA3D02R509030D2WDE010 3LSQCDR1MMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	64.7	14.2
10°-20°	164.5	36.1
20°-30°	173.2	38.1
30°-40°	49.5	10.9
40°-50°	3.1	0.7
50°-60°	0.0	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	402.4	88.5
0°-40°	451.9	99.3
0°-60°	455.0	100.0
0°-90°	455.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	455.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	707	707	707	707	707	
5°	692	691	690	689	688	65
15°	595	591	588	588	589	166
25°	388	402	404	400	384	170
35°	60	64	71	60	59	47
45°	0	2	5	2	0	2
55°	0	0	0	0	0	0
65°	0	0	0	0	0	0
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	



TEST NUMBER: P1323517

CATALOG NUMBER: LDSQA3D02R509030D2WDE010 3LSQCDR1MMS

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	706.6	706.6	706.6	706.6	706.6
1°	706.9	707.2	706.6	707.2	705.6
2°	705.9	705.3	704.6	704.9	704.0
3°	702.3	702.0	700.7	701.0	699.7
4°	697.8	696.8	695.8	695.2	693.9
5°	691.6	691.0	689.7	689.0	687.7
6°	686.4	685.1	682.8	682.2	680.9
7°	679.6	678.9	676.0	675.3	674.7
8°	674.4	672.4	668.8	669.1	667.5
9°	667.5	664.9	661.3	661.3	661.7
10°	659.4	655.5	652.2	653.2	653.5
11°	648.6	646.0	641.2	643.4	643.4
12°	636.9	633.7	630.1	632.0	633.3
13°	623.3	620.7	617.4	619.4	618.7
14°	609.9	605.0	602.8	605.4	604.4
15°	594.9	591.0	587.5	588.4	589.1
17.5°	554.9	550.7	548.1	548.4	551.3
20°	516.8	515.2	511.9	513.3	514.9
22.5°	471.9	472.6	468.7	469.6	473.5
25°	387.9	402.3	404.2	399.7	383.7
27.5°	287.4	308.9	315.4	305.0	285.4
30°	200.8	206.7	224.2	204.4	197.2
32.5°	117.8	126.6	136.0	122.4	117.5
35°	59.9	64.1	71.3	60.5	58.6
37.5°	27.7	29.6	32.5	27.7	26.0
40°	12.4	14.6	17.2	14.0	11.7
42.5°	3.9	6.8	9.1	6.2	3.6
45°	0.3	1.6	4.9	1.6	0.3
47.5°	0.0	0.3	2.0	0.3	0.0
50°	0.0	0.0	0.7	0.0	0.0
52.5°	0.0	0.0	0.0	0.0	0.0
55°	0.0	0.0	0.0	0.0	0.0
57.5°	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0
62.5°	0.0	0.0	0.0	0.0	0.0
65°	0.0	0.0	0.0	0.0	0.0
67.5°	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1323517

CATALOG NUMBER: LDSQA3D02R509030D2WDE010 3LSQCDR1MMS

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)