

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P1323740

Luminaire Tested: LDSQA3D09R259030D2WDE010 3LSQCDR1MMS

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1323740
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2510-583-23)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LDSQA3D09R259030D2WDE010 3LSQCDR1MMS
Description: 3in Adjustable Dim to Warm LED luminaire with, R25 optic, 3000K CCT AND, 90CRI ,
3LSQCDR1MMS TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 872.0 lumens
Efficiency: N/A
Efficacy: 59.3 lumens/watt
Spacing Criteria (0/90/45): 0.44 / 0.45 / 0.41
Luminous Opening: Rectangular (W 0.25' x L: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 14.7
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1323740
CATALOG NUMBER: LDSQA3D09R259030D2WDE010 3LSQCDR1MMS

Luminous Intensity Polar Plot

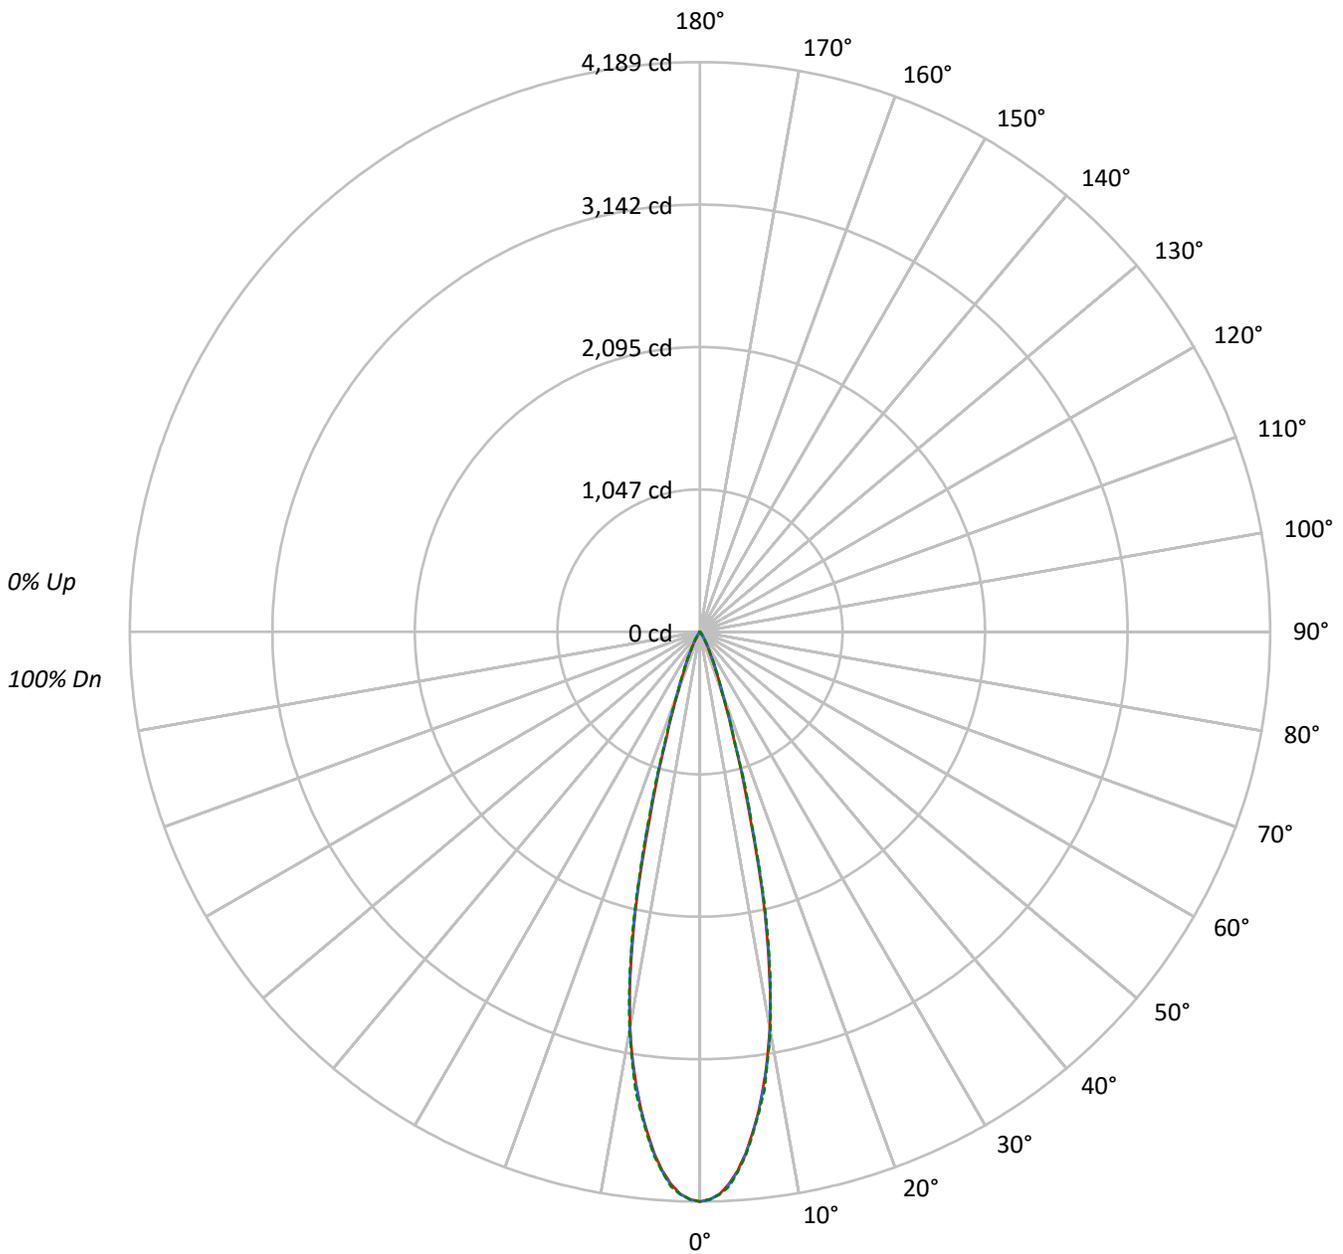

— 0°-180° - - 45°-225° - · - · 90°-270°



TEST NUMBER: P1323740

CATALOG NUMBER: LDSQA3D09R259030D2WDE010 3LSQCDR1MMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									20									20
RC	80									70									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																														
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	97	97	97	94	94	94	91	91	91	88	88	88														
1	115	113	111	110	113	111	110	108	107	106	105	103	103	102	100	99	99	97	97	97	94	94	94	91	91	91	88	88	88	85	85	85														
2	112	108	105	103	110	107	104	102	104	102	100	101	99	98	98	97	96	94	94	94	91	91	91	88	88	88	85	85	85	82	82	82														
3	108	104	101	98	107	103	100	97	100	98	96	98	96	94	96	94	93	92	92	92	89	89	89	86	86	86	83	83	83	80	80	80														
4	105	100	97	94	104	99	96	93	97	95	92	96	93	91	94	92	90	89	89	89	86	86	86	83	83	83	80	80	80	77	77	77														
5	103	97	93	90	101	96	93	90	95	92	89	93	91	89	92	90	88	87	87	87	84	84	84	81	81	81	78	78	78	75	75	75														
6	100	94	90	87	99	93	90	87	92	89	87	91	88	86	90	87	85	84	84	84	81	81	81	78	78	78	75	75	75	72	72	72														
7	97	91	87	85	96	91	87	84	90	86	84	89	86	84	88	85	83	82	82	82	79	79	79	76	76	76	73	73	73	70	70	70														
8	95	89	85	82	94	88	85	82	87	84	82	87	84	82	86	83	81	80	80	80	77	77	77	74	74	74	71	71	71	68	68	68														
9	93	86	83	80	92	86	82	80	85	82	80	85	82	80	84	81	79	78	78	78	75	75	75	72	72	72	69	69	69	66	66	66														
10	91	84	81	78	90	84	80	78	83	80	78	83	80	78	82	79	77	76	76	76	73	73	73	70	70	70	67	67	67	64	64	64														

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	721475	721475	721475
5°	665244	666748	668149
10°	516524	518395	521211
15°	255251	266003	266110
20°	85956	91711	87661
25°	35592	39545	36618
30°	13960	17560	14100
35°	3658	7169	3805
40°	1349	2855	1349
45°	170	804	170
50°	0	188	0
55°	0	0	0
60°	0	0	0
65°	0	0	0
70°	0	0	0
75°	0	0	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 45°

Vertical Angle: 45°

Luminance: 804 cd/sqm



TEST NUMBER: P1323740

CATALOG NUMBER: LDSQA3D09R259030D2WDE010 3LSQCDR1MMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	339.5	38.9
10°-20°	410.6	47.1
20°-30°	100.2	11.5
30°-40°	19.5	2.2
40°-50°	2.2	0.3
50°-60°	0.0	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	850.3	97.5
0°-40°	869.8	99.7
0°-60°	872.0	100.0
0°-90°	872.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	872.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	4189	4189	4189	4189	4189	
5°	3848	3853	3857	3874	3865	338
15°	1432	1466	1492	1507	1492	403
25°	187	197	208	199	193	95
35°	17	25	34	25	18	15
45°	1	2	3	2	1	1
55°	0	0	0	0	0	0
65°	0	0	0	0	0	0
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	0



TEST NUMBER: P1323740

CATALOG NUMBER: LDSQA3D09R259030D2WDE010 3LSQCDR1MMS

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	4189.2	4189.2	4189.2	4189.2	4189.2
1°	4173.2	4175.9	4176.5	4180.5	4172.5
2°	4135.0	4135.7	4137.7	4145.7	4138.4
3°	4064.8	4069.5	4070.1	4080.9	4082.9
4°	3969.1	3971.8	3977.2	3995.2	3979.2
5°	3848.0	3853.4	3856.7	3873.5	3864.8
6°	3698.2	3699.5	3706.9	3726.3	3714.2
7°	3545.7	3545.0	3545.7	3561.0	3557.7
8°	3361.7	3358.3	3369.0	3387.8	3400.5
9°	3169.7	3174.4	3181.1	3199.1	3184.4
10°	2953.6	2966.3	2964.3	2965.6	2980.4
11°	2704.7	2708.7	2709.4	2723.5	2721.5
12°	2412.4	2412.4	2434.5	2457.2	2449.8
13°	2117.4	2138.1	2123.4	2128.1	2157.5
14°	1773.5	1789.6	1809.6	1828.4	1813.6
15°	1431.6	1465.8	1491.9	1506.6	1492.5
17.5°	820.2	831.6	853.6	856.3	847.6
20°	469.0	483.0	500.4	495.1	478.3
22.5°	295.0	299.0	316.4	307.7	303.7
25°	187.3	197.4	208.1	199.4	192.7
27.5°	116.4	123.1	134.5	125.1	117.7
30°	70.2	76.3	88.3	75.6	70.9
32.5°	36.8	45.5	55.5	46.2	36.8
35°	17.4	24.8	34.1	24.8	18.1
37.5°	10.7	13.4	20.7	13.4	10.7
40°	6.0	8.7	12.7	8.7	6.0
42.5°	2.7	4.7	6.0	4.7	3.3
45°	0.7	2.0	3.3	2.0	0.7
47.5°	0.0	0.0	2.0	0.7	0.0
50°	0.0	0.0	0.7	0.0	0.0
52.5°	0.0	0.0	0.0	0.0	0.0
55°	0.0	0.0	0.0	0.0	0.0
57.5°	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0
62.5°	0.0	0.0	0.0	0.0	0.0
65°	0.0	0.0	0.0	0.0	0.0
67.5°	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1323740
CATALOG NUMBER: LDSQA3D09R259030D2WDE010 3LSQCDR1MMS

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)