

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P1323776

Luminaire Tested: LDSQA3D09R359030D2WDE010 3LSQPHR1MB

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1323776
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2510-583-5)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LDSQA3D09R359030D2WDE010 3LSQPHR1MB
Description: 3in Adjustable Dim to Warm LED luminaire with, R35 optic, 3000K CCT AND, 90CRI ,
3LSQPHR1MB TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 777.0 lumens
Efficiency: N/A
Efficacy: 52.9 lumens/watt
Spacing Criteria (0/90/45): 0.57 / 0.56 / 0.51
Luminous Opening: Rectangular (W 0.25' x L: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 14.7
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1323776

CATALOG NUMBER: LDSQA3D09R359030D2WDE010 3LSQPHR1MB

Luminous Intensity Polar Plot

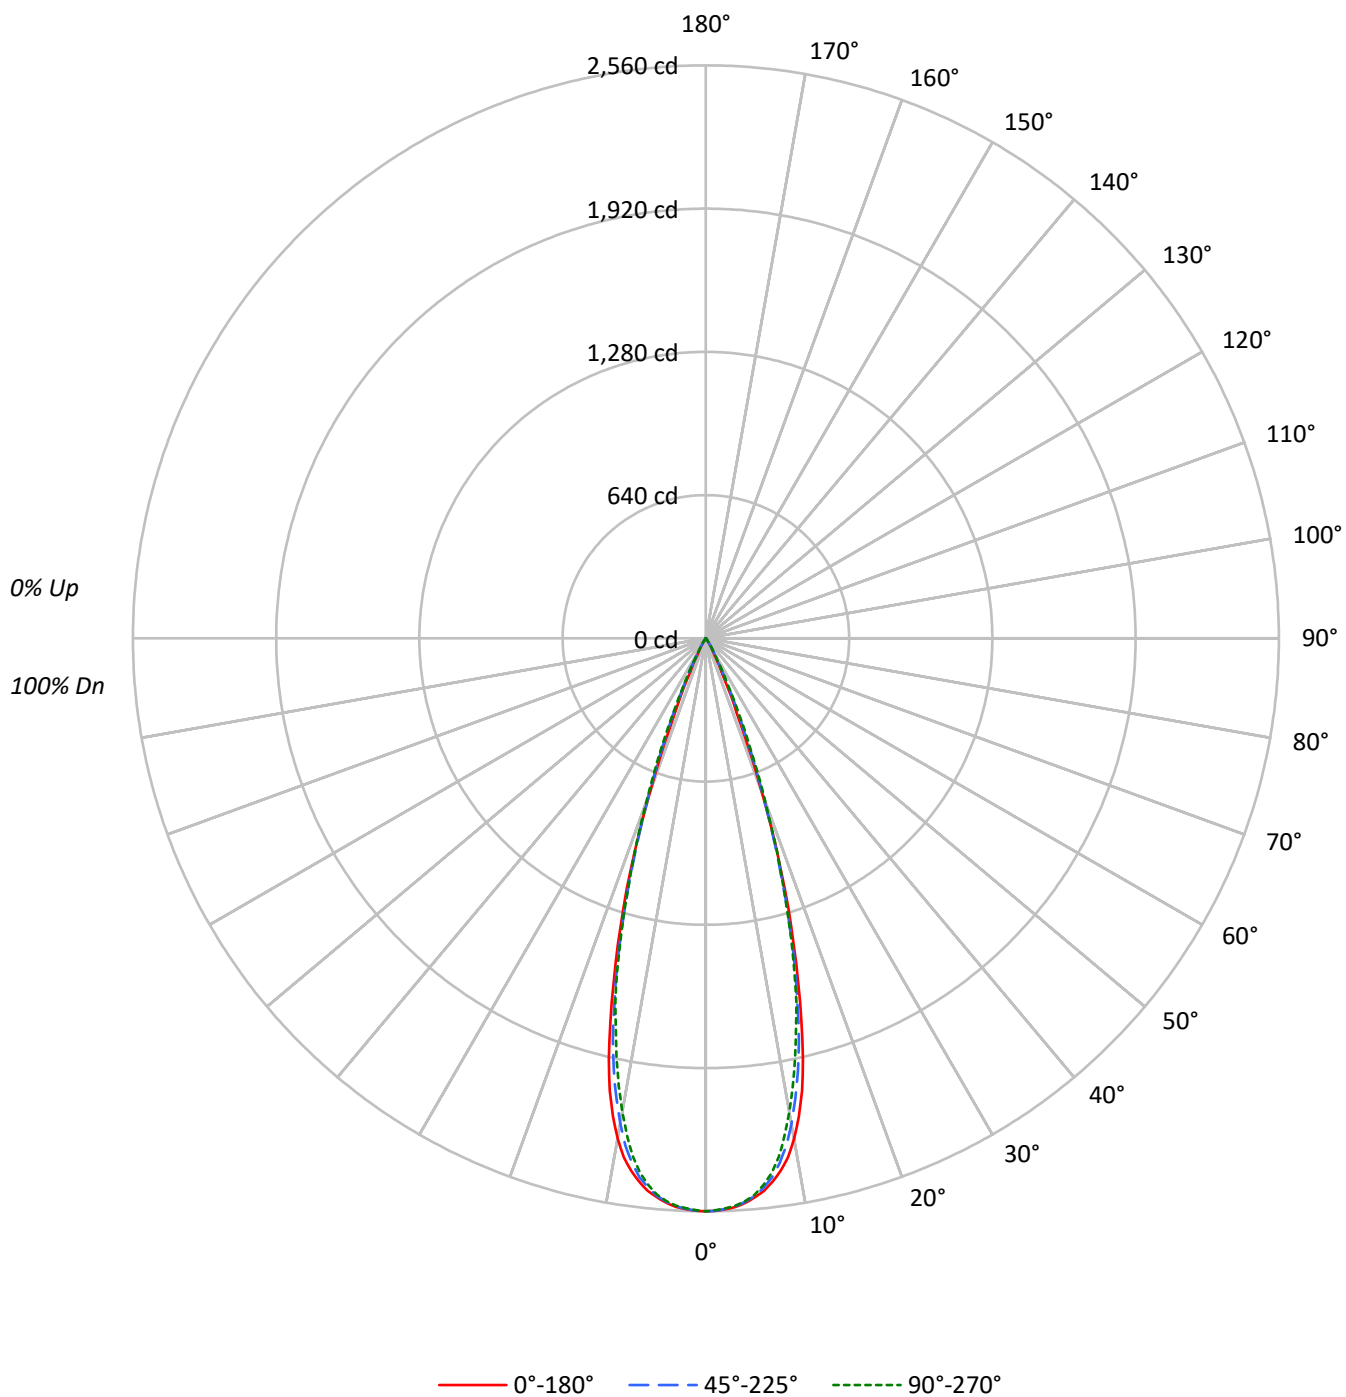

TEST NUMBER: P1323776

CATALOG NUMBER: LDSQA3D09R359030D2WDE010 3LSQPHR1MB

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	99	98
1	115	113	111	109	113	111	109	108	107	106	104	103	102	101	100	99	98	97	96	95
2	111	108	105	102	109	106	103	101	103	101	99	100	98	97	97	96	95	94	93	92
3	108	103	100	97	106	102	99	96	99	97	94	97	95	93	95	93	92	91	90	89
4	104	99	95	92	103	98	94	92	96	93	91	94	92	90	93	90	89	88	87	86
5	101	95	91	88	100	95	91	88	93	90	87	92	89	87	90	88	86	85	84	83
6	98	92	88	85	97	91	88	85	90	87	84	89	86	84	88	85	83	82	81	80
7	96	89	85	82	94	89	85	82	87	84	81	86	83	81	85	83	81	80	79	78
8	93	86	82	79	92	86	82	79	85	81	79	84	81	79	83	80	78	77	76	75
9	90	84	80	77	89	83	79	77	82	79	76	82	79	76	81	78	76	75	74	73
10	88	81	77	75	87	81	77	74	80	77	74	80	76	74	79	76	74	73	72	71

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	440873	440873	440873
5°	433308	432391	431458
10°	397116	385189	375816
15°	284367	275292	271958
20°	131867	136394	141177
25°	31278	44504	46424
30°	9188	10520	11852
35°	2102	3385	3091
40°	450	899	607
45°	170	170	170
50°	188	0	188
55°	0	0	0
60°	0	0	0
65°	0	0	0
70°	0	0	0
75°	0	0	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 52.5°

Luminance: 198 cd/sqm

TEST NUMBER: P1323776

CATALOG NUMBER: LDSQA3D09R359030D2WDE010 3LSQPHR1MB

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	229.8	29.6
10°-20°	410.9	52.9
20°-30°	123.6	15.9
30°-40°	11.8	1.5
40°-50°	0.8	0.1
50°-60°	0.1	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	764.3	98.4
0°-40°	776.1	99.9
0°-60°	777.0	100.0
0°-90°	777.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	777.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2560	2560	2560	2560	2560	
5°	2506	2506	2501	2498	2496	232
15°	1595	1583	1544	1537	1525	421
25°	165	181	234	244	244	106
35°	10	13	16	17	15	9
45°	1	1	1	1	1	1
55°	0	0	0	0	0	0
65°	0	0	0	0	0	0
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	

TEST NUMBER: P1323776

CATALOG NUMBER: LDSQA3D09R359030D2WDE010 3LSQPHR1MB

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2559.9	2559.9	2559.9	2559.9	2559.9
1°	2558.6	2558.6	2557.3	2557.3	2554.6
2°	2552.6	2553.3	2550.6	2549.9	2547.9
3°	2543.2	2541.2	2541.2	2539.9	2538.5
4°	2528.5	2524.5	2523.1	2523.8	2521.1
5°	2506.4	2505.7	2501.1	2497.7	2495.7
6°	2482.3	2477.6	2467.6	2458.9	2456.9
7°	2446.2	2436.1	2427.4	2409.4	2406.7
8°	2402.0	2385.9	2367.2	2341.8	2340.4
9°	2347.8	2321.7	2295.6	2261.5	2249.4
10°	2270.8	2246.7	2202.6	2172.4	2149.0
11°	2175.1	2145.0	2093.5	2057.3	2037.9
12°	2066.7	2038.6	1978.4	1945.6	1918.1
13°	1927.5	1904.1	1847.8	1811.7	1790.3
14°	1766.2	1748.8	1695.3	1679.2	1671.8
15°	1594.9	1582.8	1544.0	1537.3	1525.3
17.5°	1173.9	1153.8	1131.7	1135.7	1139.8
20°	719.5	747.6	744.2	758.9	770.3
22.5°	358.7	394.9	437.0	462.5	475.2
25°	164.6	181.4	234.2	244.3	244.3
27.5°	83.0	87.0	110.4	112.4	117.8
30°	46.2	49.5	52.9	58.9	59.6
32.5°	23.4	27.4	28.8	32.1	30.8
35°	10.0	13.4	16.1	17.4	14.7
37.5°	4.7	6.0	8.7	8.0	6.0
40°	2.0	2.7	4.0	3.3	2.7
42.5°	1.3	1.3	2.0	1.3	1.3
45°	0.7	0.7	0.7	0.7	0.7
47.5°	0.7	0.7	0.0	0.7	0.7
50°	0.7	0.0	0.0	0.0	0.7
52.5°	0.7	0.0	0.0	0.0	0.7
55°	0.0	0.0	0.0	0.0	0.0
57.5°	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0
62.5°	0.0	0.0	0.0	0.0	0.0
65°	0.0	0.0	0.0	0.0	0.0
67.5°	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1323776

CATALOG NUMBER: LDSQA3D09R359030D2WDE010 3LSQPHR1MB

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)