

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P1325001

Luminaire Tested: LDSQA3D05R35W2N902765DE010 3LSQPHR1MMS_3000K

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1325001
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2510-583-5)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LDSQA3D05R35W2N902765DE010 3LSQPHR1MMS_3000K
Description: 3in Adjustable Tunable White LED luminaire with, R35 optic, 3000K CCT AND, 90CRI ,
3LSQPHR1MMS TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 459.0 lumens
Efficiency: N/A
Efficacy: 77.8 lumens/watt
Spacing Criteria (0/90/45): 0.57 / 0.56 / 0.51
Luminous Opening: Rectangular (W 0.25' x L: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 5.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1325001

CATALOG NUMBER: LDSQA3D05R35W2N902765DE010 3LSQPHR1MMS_3000K

Luminous Intensity Polar Plot

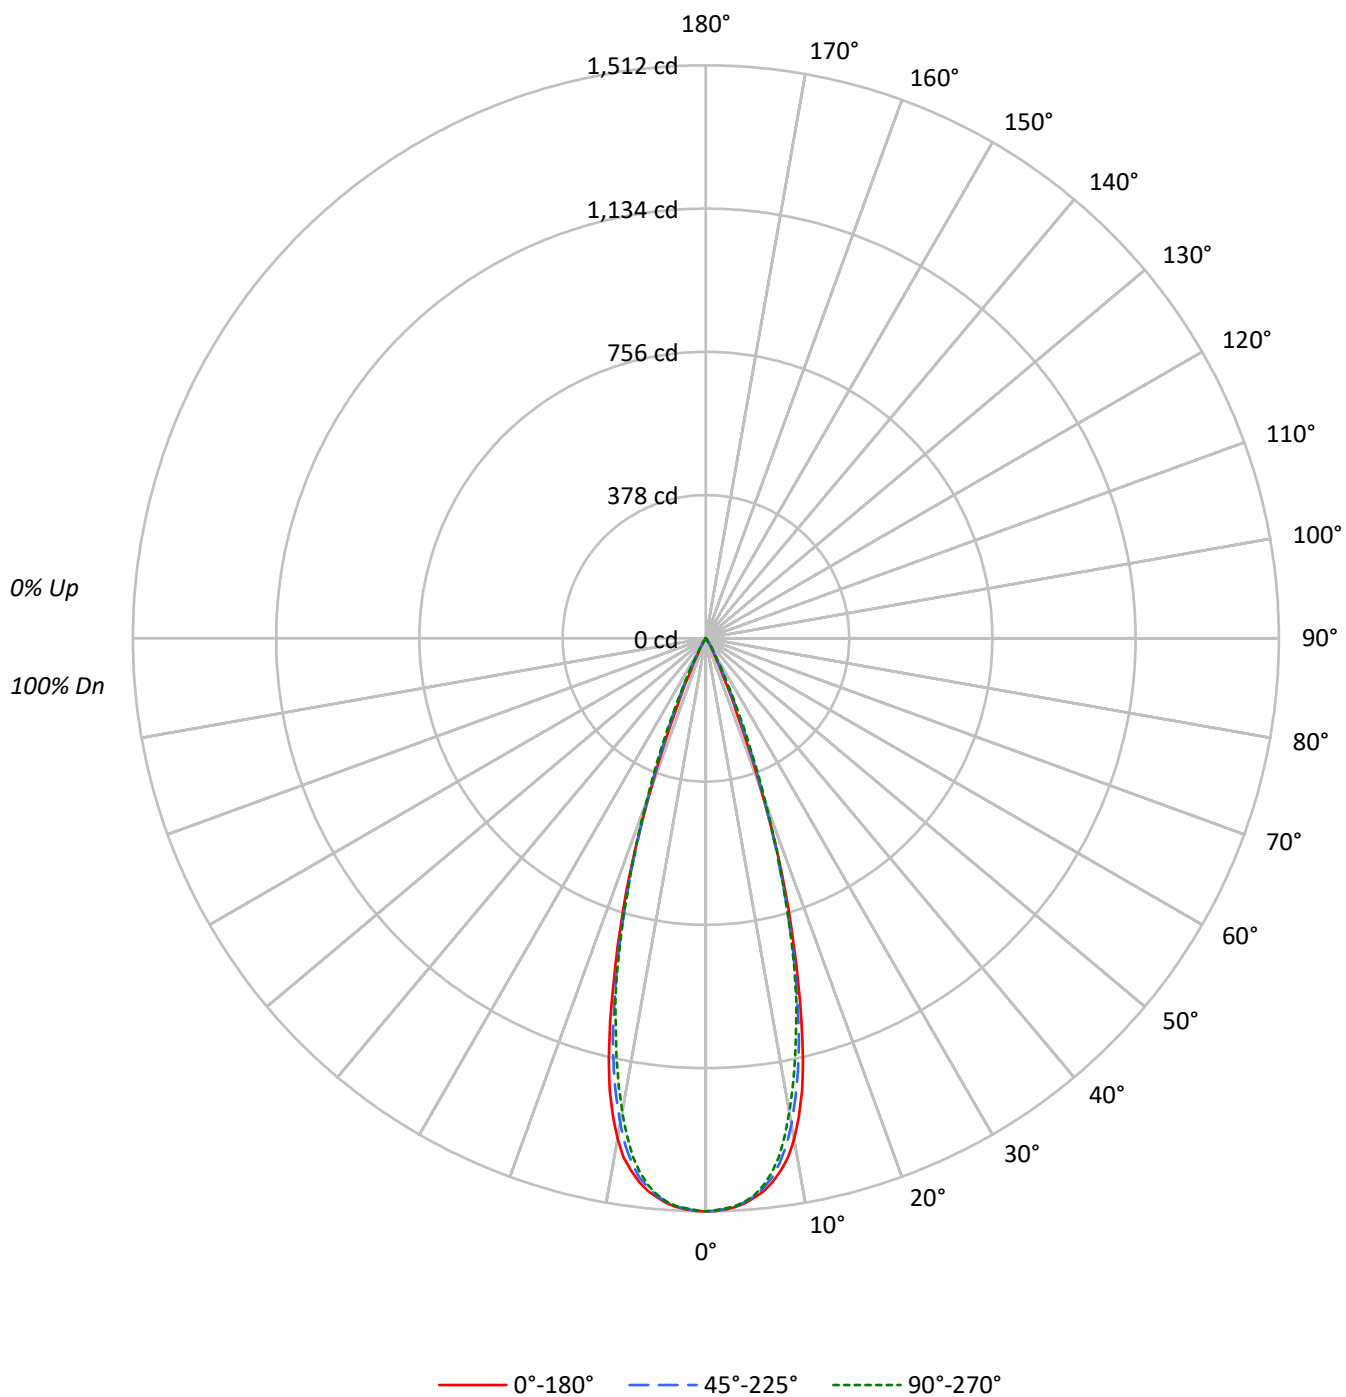

TEST NUMBER: P1325001

CATALOG NUMBER: LDSQA3D05R35W2N902765DE010 3LSQPHR1MMS_3000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	99	98
1	115	113	111	109	113	111	109	108	107	106	104	103	102	101	100	99	98	97	96	95
2	111	108	105	102	109	106	103	101	103	101	99	100	98	97	97	96	95	94	93	92
3	108	103	100	97	106	102	99	96	99	97	94	97	95	93	95	93	92	91	90	89
4	104	99	95	92	103	98	94	92	96	93	91	94	92	90	93	90	89	88	87	86
5	101	95	91	88	100	95	91	88	93	90	87	92	89	87	90	88	86	85	84	83
6	98	92	88	85	97	91	88	85	90	87	84	89	86	84	88	85	83	82	81	80
7	96	89	85	82	94	89	85	82	87	84	81	86	83	81	85	83	81	80	79	78
8	93	86	82	79	92	86	82	79	85	81	79	84	81	79	83	80	78	77	76	75
9	90	84	80	77	89	83	79	77	82	79	76	82	79	76	81	78	76	75	74	73
10	88	81	77	75	87	81	77	74	80	77	74	80	76	74	79	76	74	73	72	71

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	260435	260435	260435
5°	255967	255431	254878
10°	234601	227536	222009
15°	167975	162626	160646
20°	77892	80568	83409
25°	18490	26300	27421
30°	5429	6205	7000
35°	1240	1997	1829
40°	270	540	360
45°	97	97	97
50°	107	0	107
55°	0	0	0
60°	0	0	0
65°	0	0	0
70°	0	0	0
75°	0	0	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 52.5°

Luminance: 113 cd/sqm

TEST NUMBER: P1325001

CATALOG NUMBER: LDSQA3D05R35W2N902765DE010 3LSQPHR1MMS_3000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	135.8	29.6
10°-20°	242.7	52.9
20°-30°	73.0	15.9
30°-40°	7.0	1.5
40°-50°	0.5	0.1
50°-60°	0.0	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	451.5	98.4
0°-40°	458.5	99.9
0°-60°	459.0	100.0
0°-90°	459.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	459.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1512	1512	1512	1512	1512	
5°	1481	1480	1478	1476	1474	137
15°	942	935	912	908	901	249
25°	97	107	138	144	144	63
35°	6	8	10	10	9	5
45°	0	0	0	0	0	0
55°	0	0	0	0	0	0
65°	0	0	0	0	0	0
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	

TEST NUMBER: P1325001

CATALOG NUMBER: LDSQA3D05R35W2N902765DE010 3LSQPHR1MMS_3000K

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1512.2	1512.2	1512.2	1512.2	1512.2
1°	1511.5	1511.5	1510.7	1510.7	1509.1
2°	1507.9	1508.3	1506.7	1506.3	1505.1
3°	1502.4	1501.2	1501.2	1500.4	1499.6
4°	1493.7	1491.3	1490.5	1490.9	1489.3
5°	1480.6	1480.2	1477.5	1475.5	1474.3
6°	1466.4	1463.6	1457.7	1452.5	1451.4
7°	1445.0	1439.1	1434.0	1423.3	1421.7
8°	1418.9	1409.5	1398.4	1383.4	1382.6
9°	1386.9	1371.5	1356.1	1335.9	1328.8
10°	1341.5	1327.2	1301.1	1283.3	1269.5
11°	1284.9	1267.1	1236.7	1215.3	1203.9
12°	1220.9	1204.3	1168.7	1149.3	1133.1
13°	1138.6	1124.8	1091.6	1070.2	1057.6
14°	1043.4	1033.1	1001.4	992.0	987.6
15°	942.1	935.0	912.1	908.1	901.0
17.5°	693.5	681.6	668.6	670.9	673.3
20°	425.0	441.6	439.6	448.3	455.1
22.5°	211.9	233.3	258.2	273.2	280.7
25°	97.3	107.1	138.4	144.3	144.3
27.5°	49.0	51.4	65.2	66.4	69.6
30°	27.3	29.3	31.2	34.8	35.2
32.5°	13.8	16.2	17.0	19.0	18.2
35°	5.9	7.9	9.5	10.3	8.7
37.5°	2.8	3.6	5.1	4.7	3.6
40°	1.2	1.6	2.4	2.0	1.6
42.5°	0.8	0.8	1.2	0.8	0.8
45°	0.4	0.4	0.4	0.4	0.4
47.5°	0.4	0.4	0.0	0.4	0.4
50°	0.4	0.0	0.0	0.0	0.4
52.5°	0.4	0.0	0.0	0.0	0.4
55°	0.0	0.0	0.0	0.0	0.0
57.5°	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0
62.5°	0.0	0.0	0.0	0.0	0.0
65°	0.0	0.0	0.0	0.0	0.0
67.5°	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1325001

CATALOG NUMBER: LDSQA3D05R35W2N902765DE010 3LSQPHR1MMS_3000K

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)