

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P1325222

Luminaire Tested: LDSQA3D05R45W2N902765DE010 3LSQCDR1MB_2700K

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1325222
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2510-583-32)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LDSQA3D05R45W2N902765DE010 3LSQCDR1MB_2700K
Description: 3in Adjustable Tunable White LED luminaire with, R45 optic, 2700K CCT AND, 90CRI ,
3LSQCDR1MB TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 483.0 lumens
Efficiency: N/A
Efficacy: 81.9 lumens/watt
Spacing Criteria (0/90/45): 0.72 / 0.74 / 0.67
Luminous Opening: Rectangular (W 0.25' x L: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 5.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1325222

CATALOG NUMBER: LDSQA3D05R45W2N902765DE010 3LSQCDR1MB_2700K

Luminous Intensity Polar Plot

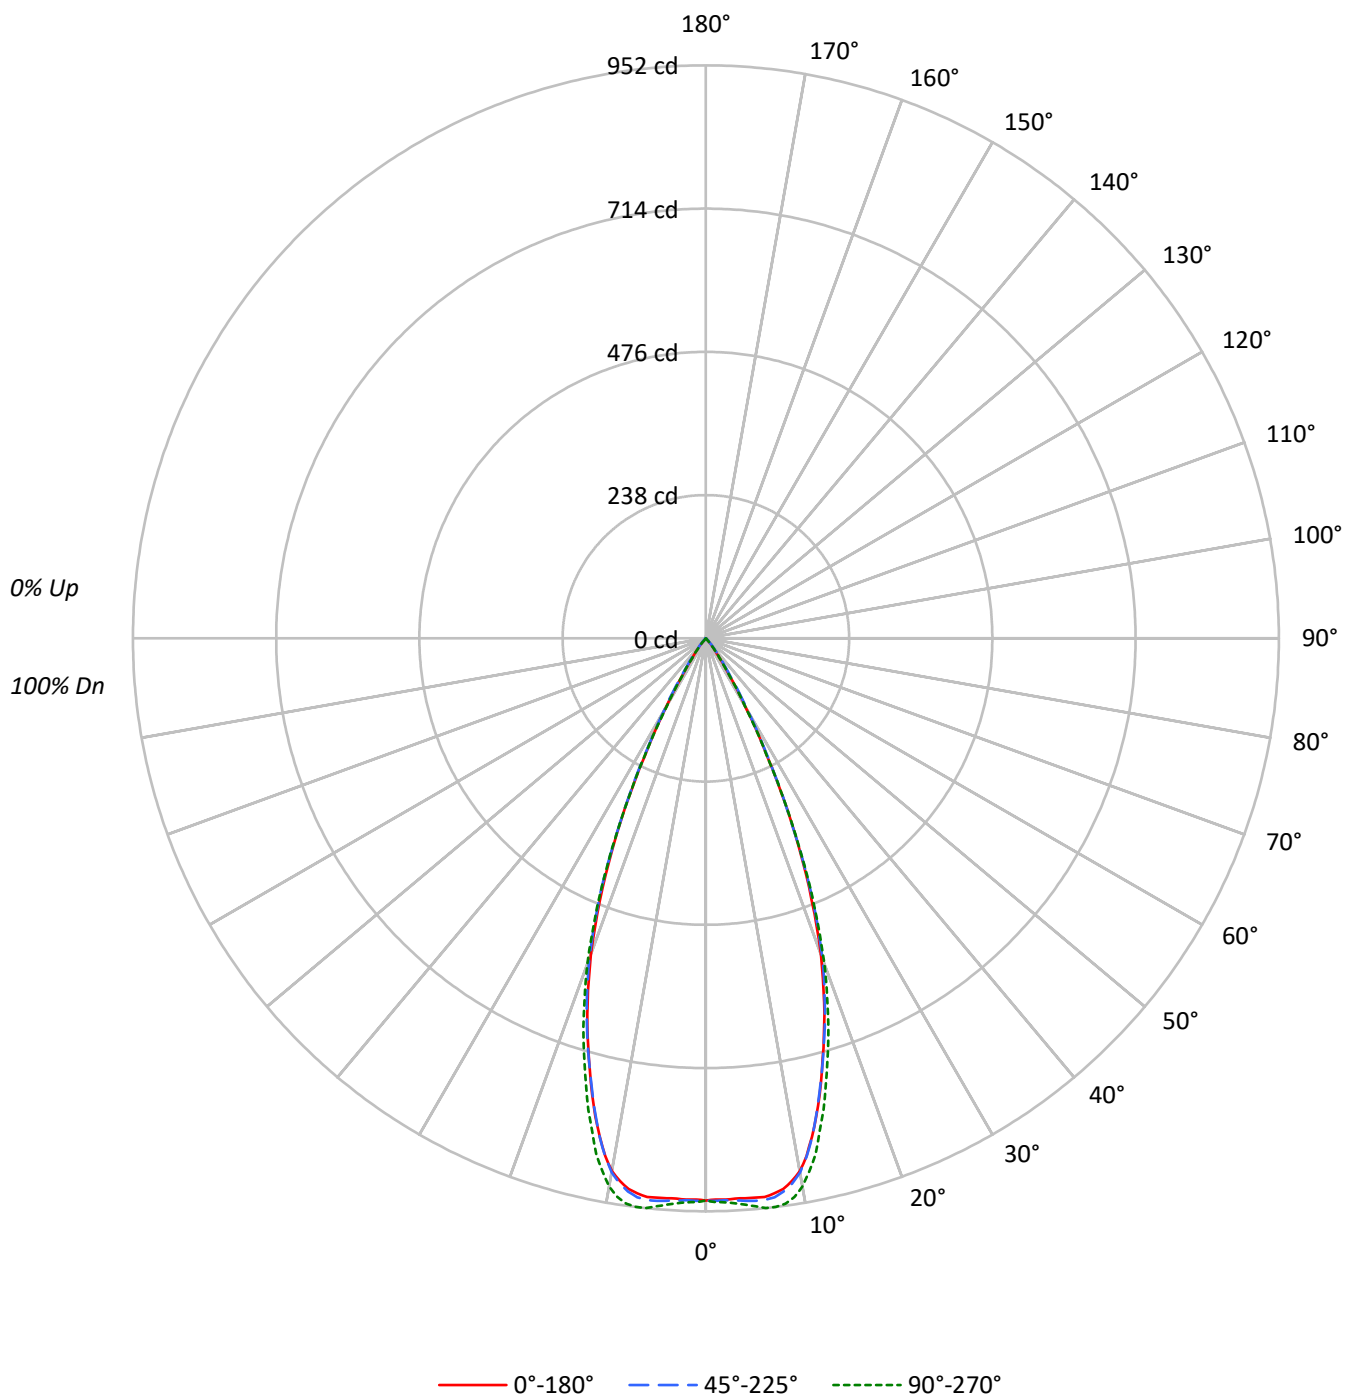

TEST NUMBER: P1325222

CATALOG NUMBER: LDSQA3D05R45W2N902765DE010 3LSQCDR1MB_2700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	99	99
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	95	94	93
2	110	106	103	100	108	104	101	99	101	99	96	98	96	94	95	94	92	91	90	89
3	106	100	96	93	104	99	95	92	97	93	91	94	92	89	92	90	88	87	86	85
4	102	95	91	87	100	94	90	87	92	89	86	90	87	85	89	86	84	83	82	81
5	98	91	86	83	96	90	86	82	88	85	82	87	83	81	85	82	80	79	78	77
6	94	87	82	78	93	86	81	78	85	81	78	83	80	77	82	79	77	75	74	73
7	91	83	78	75	89	82	78	74	81	77	74	80	76	74	79	76	73	72	71	70
8	87	79	75	71	86	79	74	71	78	74	71	77	73	70	76	73	70	69	68	67
9	84	76	71	68	83	76	71	68	75	71	68	74	70	68	73	70	67	66	65	64
10	81	73	68	65	80	73	68	65	72	68	65	71	67	65	71	67	65	64	63	62

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	160890	160890	160890
5°	161263	162196	163804
10°	157217	157531	161676
15°	132636	132707	137058
20°	102396	103844	105548
25°	63526	63583	64001
30°	26210	27841	25773
35°	8158	9966	7842
40°	2496	3462	2338
45°	170	1315	170
50°	0	188	0
55°	0	0	0
60°	0	0	0
65°	0	0	0
70°	0	0	0
75°	0	0	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 45°

Vertical Angle: 45°

Luminance: 1315 cd/sqm

TEST NUMBER: P1325222

CATALOG NUMBER: LDSQA3D05R45W2N902765DE010 3LSQCDR1MB_2700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	88.9	18.4
10°-20°	206.7	42.8
20°-30°	151.7	31.4
30°-40°	32.6	6.7
40°-50°	3.1	0.6
50°-60°	0.0	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	447.3	92.6
0°-40°	479.9	99.4
0°-60°	483.0	100.0
0°-90°	483.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	483.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	934	934	934	934	934	
5°	933	935	938	945	948	88
15°	744	742	744	756	769	205
25°	334	333	335	335	337	150
35°	39	42	47	41	37	31
45°	1	2	5	2	1	2
55°	0	0	0	0	0	0
65°	0	0	0	0	0	0
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	

TEST NUMBER: P1325222

CATALOG NUMBER: LDSQA3D05R45W2N902765DE010 3LSQCDR1MB_2700K

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	934.2	934.2	934.2	934.2	934.2
1°	932.4	934.6	934.6	936.0	936.7
2°	933.1	934.6	934.2	936.7	937.8
3°	932.1	934.6	935.3	938.2	940.0
4°	932.4	934.6	936.7	941.0	943.5
5°	932.8	935.3	938.2	944.6	947.5
6°	933.1	934.9	938.2	946.4	951.8
7°	929.5	932.1	935.6	946.1	951.8
8°	923.8	925.2	928.1	941.7	948.6
9°	913.0	912.7	917.0	932.1	940.0
10°	899.0	894.7	900.8	915.9	924.5
11°	876.4	871.7	877.1	893.3	901.5
12°	847.0	847.0	848.0	862.4	876.8
13°	815.7	812.1	814.3	830.4	840.5
14°	781.3	777.7	779.8	792.0	807.8
15°	743.9	742.5	744.3	756.1	768.7
17.5°	655.2	652.0	658.5	670.3	676.8
20°	558.7	564.0	566.6	574.1	575.9
22.5°	447.7	453.5	457.1	458.1	459.2
25°	334.3	333.2	334.6	334.6	336.8
27.5°	219.7	219.7	223.7	221.2	218.7
30°	131.8	137.2	140.0	135.4	129.6
32.5°	71.8	77.2	81.9	75.0	70.0
35°	38.8	41.6	47.4	40.6	37.3
37.5°	21.2	23.7	27.3	23.0	21.2
40°	11.1	13.6	15.4	13.6	10.4
42.5°	3.6	6.8	9.0	6.8	3.2
45°	0.7	2.2	5.4	2.2	0.7
47.5°	0.0	0.4	2.5	0.4	0.0
50°	0.0	0.0	0.7	0.0	0.0
52.5°	0.0	0.0	0.0	0.0	0.0
55°	0.0	0.0	0.0	0.0	0.0
57.5°	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0
62.5°	0.0	0.0	0.0	0.0	0.0
65°	0.0	0.0	0.0	0.0	0.0
67.5°	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1325222

CATALOG NUMBER: LDSQA3D05R45W2N902765DE010 3LSQCDR1MB_2700K

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)