

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P1326321

Luminaire Tested: LDSQA3D09R30W2N902750DE010 3LSQPHR1MB_3500K

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1326321
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2510-583-4)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LDSQA3D09R30W2N902750DE010 3LSQPHR1MB_3500K
Description: 3in Adjustable Tunable White LED luminaire with, R30 optic, 3500K CCT AND, 90CRI ,
3LSQPHR1MB TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 686.0 lumens
Efficiency: N/A
Efficacy: 76.2 lumens/watt
Spacing Criteria (0/90/45): 0.5 / 0.49 / 0.46
Luminous Opening: Rectangular (W 0.25' x L: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1326321

CATALOG NUMBER: LDSQA3D09R30W2N902750DE010 3LSQPHR1MB_3500K

Luminous Intensity Polar Plot

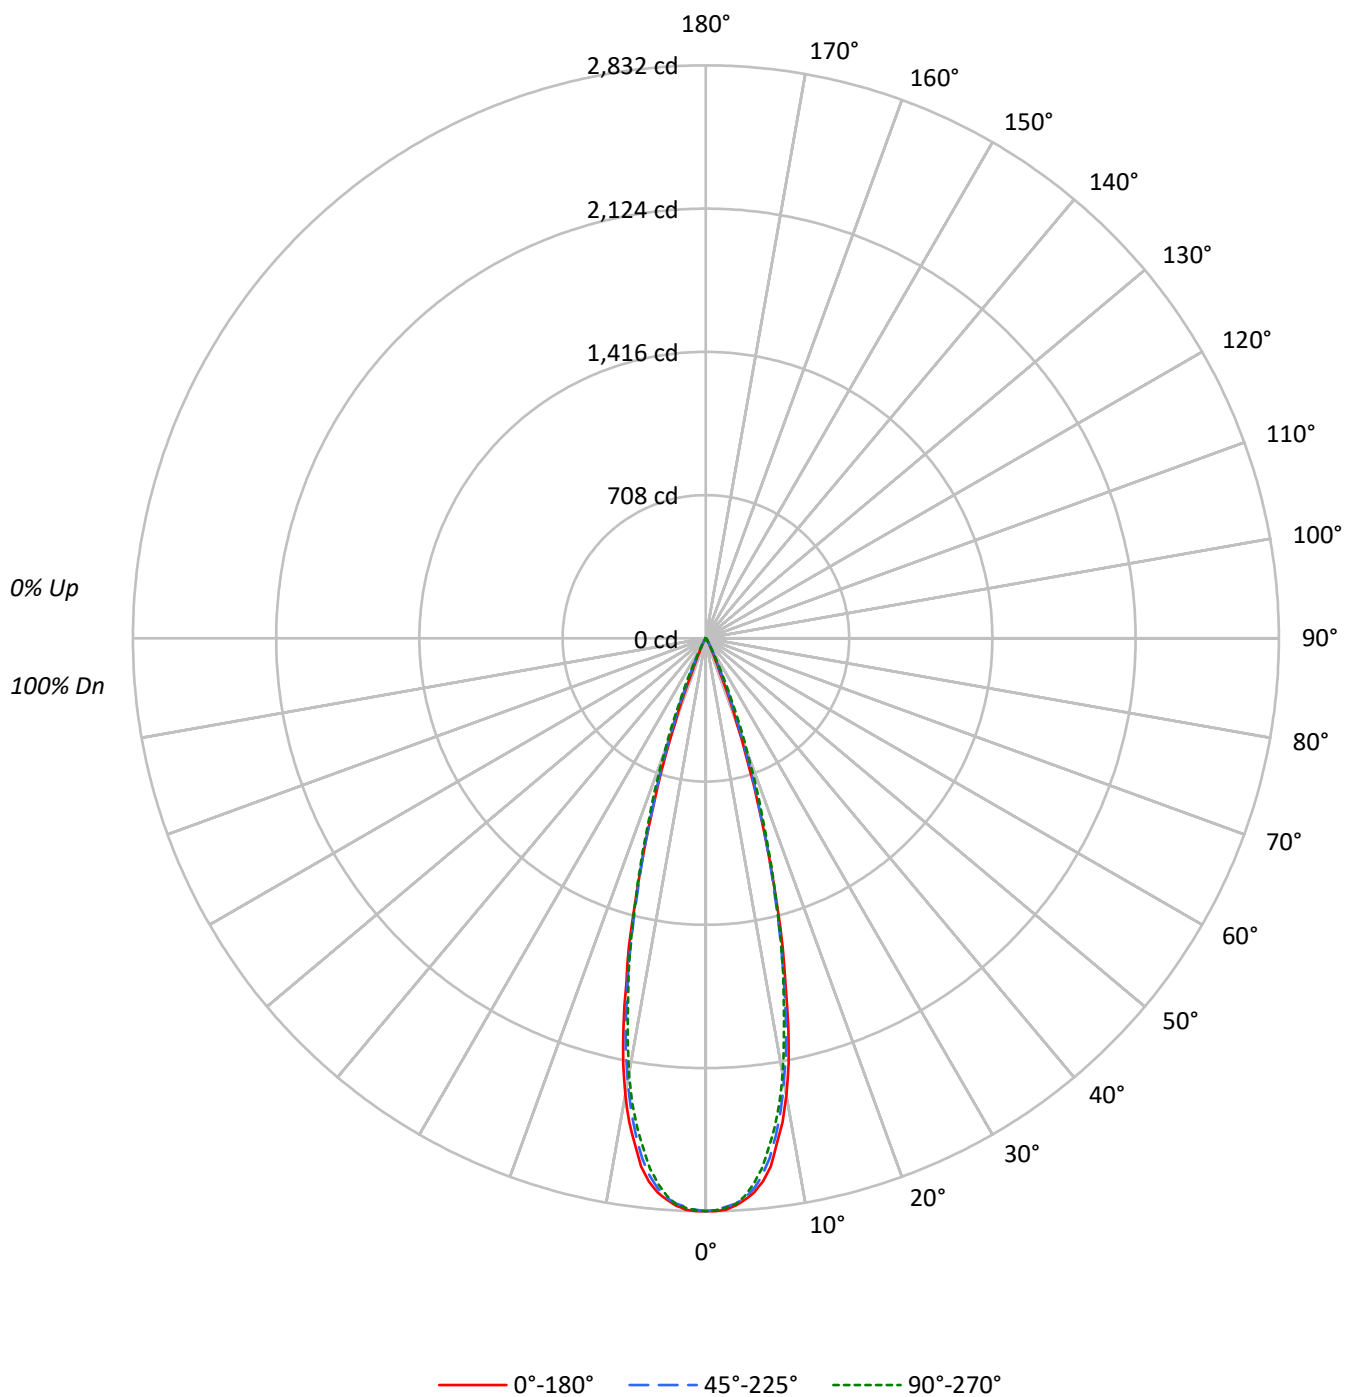

TEST NUMBER: P1326321

CATALOG NUMBER: LDSQA3D09R30W2N902750DE010 3LSQPHR1MB_3500K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10			0
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	115	113	111	110	113	111	109	108	107	106	105		103	103	102		100	99	99	97
2	112	108	105	103	110	107	104	102	104	101	100		101	99	98		98	97	96	94
3	108	104	101	98	107	103	100	97	100	98	96		98	96	94		96	94	93	92
4	105	100	97	94	104	99	96	93	97	94	92		95	93	91		94	92	90	89
5	102	97	93	90	101	96	93	90	95	91	89		93	90	88		92	89	88	87
6	100	94	90	87	99	93	90	87	92	89	86		91	88	86		90	87	85	84
7	97	91	87	84	96	91	87	84	90	86	84		88	86	83		88	85	83	82
8	95	89	85	82	94	88	84	82	87	84	82		86	83	81		86	83	81	80
9	92	86	82	80	92	86	82	80	85	82	79		84	81	79		84	81	79	78
10	90	84	80	78	90	84	80	78	83	80	77		82	79	77		82	79	77	76

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	487580	487580	487580
5°	475041	471756	467884
10°	400894	388582	382269
15°	241594	234836	239169
20°	81942	94625	109159
25°	15069	23601	27877
30°	5171	5767	6463
35°	1493	1871	1997
40°	405	674	540
45°	146	146	146
50°	161	0	161
55°	0	0	0
60°	0	0	0
65°	0	0	0
70°	0	0	0
75°	0	0	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 52.5°

Luminance: 170 cd/sqm

TEST NUMBER: P1326321

CATALOG NUMBER: LDSQA3D09R30W2N902750DE010 3LSQPHR1MB_3500K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	244.8	35.7
10°-20°	357.8	52.2
20°-30°	75.7	11.0
30°-40°	7.0	1.0
40°-50°	0.7	0.1
50°-60°	0.0	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	678.3	98.9
0°-40°	685.3	99.9
0°-60°	686.0	100.0
0°-90°	686.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	686.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2831	2831	2831	2831	2831	
5°	2748	2742	2729	2721	2706	248
15°	1355	1350	1317	1348	1341	357
25°	79	89	124	146	147	58
35°	7	9	9	11	10	6
45°	1	1	1	1	1	1
55°	0	0	0	0	0	0
65°	0	0	0	0	0	0
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	0

TEST NUMBER: P1326321

CATALOG NUMBER: LDSQA3D09R30W2N902750DE010 3LSQPHR1MB_3500K

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2831.1	2831.1	2831.1	2831.1	2831.1
1°	2831.7	2828.8	2824.6	2830.6	2826.4
2°	2825.8	2818.7	2812.8	2818.7	2817.0
3°	2808.1	2802.2	2798.0	2801.0	2801.0
4°	2781.5	2775.0	2771.4	2772.0	2763.1
5°	2747.8	2742.4	2728.8	2720.6	2706.4
6°	2698.1	2685.1	2668.5	2654.9	2636.6
7°	2630.7	2610.5	2586.9	2563.2	2540.2
8°	2522.4	2513.0	2481.0	2465.1	2442.0
9°	2420.7	2397.6	2363.3	2337.3	2324.9
10°	2292.4	2258.1	2222.0	2201.3	2185.9
11°	2140.4	2105.5	2076.5	2046.3	2022.7
12°	1961.8	1932.2	1899.1	1879.0	1851.2
13°	1750.0	1745.9	1708.6	1702.1	1698.6
14°	1568.5	1551.9	1515.2	1525.3	1527.6
15°	1355.0	1350.2	1317.1	1347.9	1341.4
17.5°	848.7	850.5	871.2	919.7	935.0
20°	447.1	460.7	516.3	574.9	595.6
22.5°	181.0	211.1	267.9	307.5	334.2
25°	79.3	88.7	124.2	146.1	146.7
27.5°	44.9	45.5	59.7	62.1	63.3
30°	26.0	26.6	29.0	30.8	32.5
32.5°	14.2	15.4	16.0	18.3	18.3
35°	7.1	8.9	8.9	10.6	9.5
37.5°	4.1	4.7	5.3	5.3	4.7
40°	1.8	2.4	3.0	3.0	2.4
42.5°	0.6	1.2	1.2	1.2	1.8
45°	0.6	0.6	0.6	0.6	0.6
47.5°	0.6	0.6	0.0	0.6	0.6
50°	0.6	0.0	0.0	0.0	0.6
52.5°	0.6	0.0	0.0	0.0	0.6
55°	0.0	0.0	0.0	0.0	0.0
57.5°	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0
62.5°	0.0	0.0	0.0	0.0	0.0
65°	0.0	0.0	0.0	0.0	0.0
67.5°	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1326321
CATALOG NUMBER: LDSQA3D09R30W2N902750DE010 3LSQPHR1MB_3500K

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)