

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P1326418

Luminaire Tested: LDSQA3D09R30W2N902765DE010 3LSQPHR1MB_6500K

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1326418
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2510-583-4)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LDSQA3D09R30W2N902765DE010 3LSQPHR1MB_6500K
Description: 3in Adjustable Tunable White LED luminaire with, R30 optic, 6500K CCT AND, 90CRI ,
3LSQPHR1MB TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 682.0 lumens
Efficiency: N/A
Efficacy: 75.8 lumens/watt
Spacing Criteria (0/90/45): 0.5 / 0.49 / 0.46
Luminous Opening: Rectangular (W 0.25' x L: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1326418

CATALOG NUMBER: LDSQA3D09R30W2N902765DE010 3LSQPHR1MB_6500K

Luminous Intensity Polar Plot

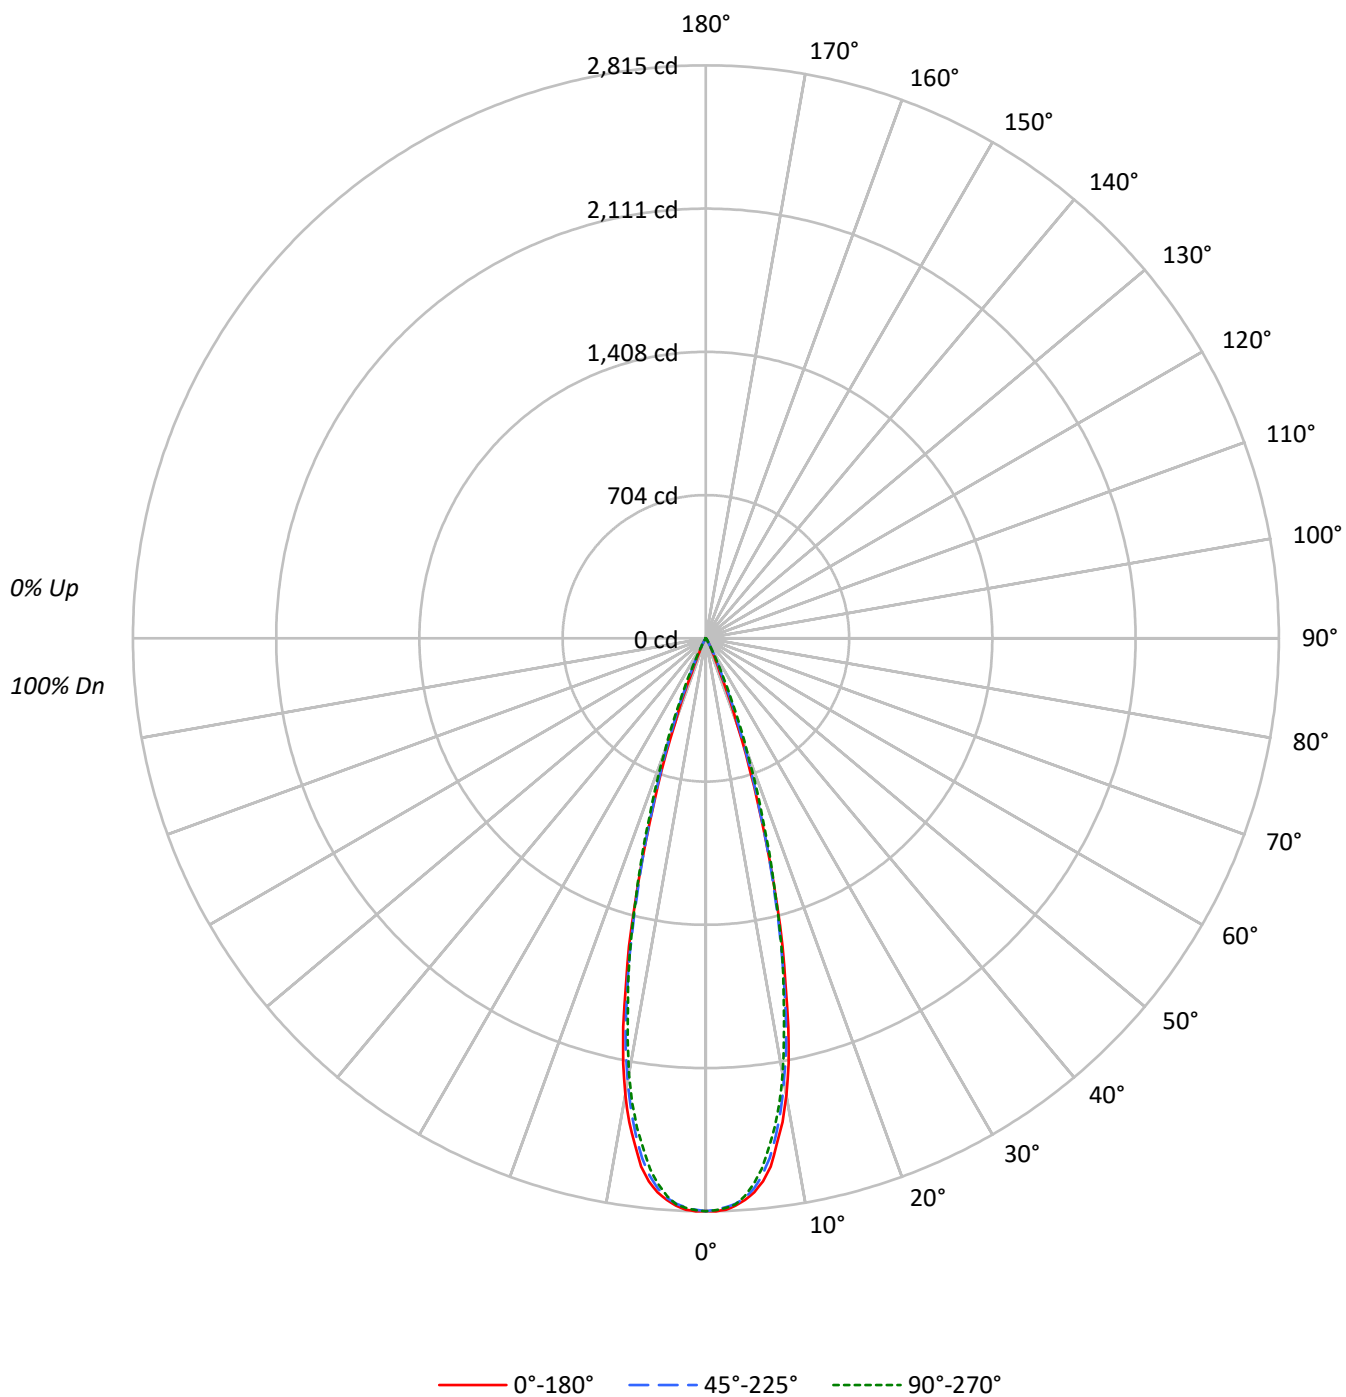

TEST NUMBER: P1326418

CATALOG NUMBER: LDSQA3D09R30W2N902765DE010 3LSQPHR1MB_6500K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10			0
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	115	113	111	110	113	111	109	108	107	106	105		103	103	102		100	99	99	97
2	112	108	105	103	110	107	104	102	104	101	100		101	99	98		98	97	96	94
3	108	104	101	98	107	103	100	97	100	98	96		98	96	94		96	94	93	92
4	105	100	97	94	104	99	96	93	97	94	92		95	93	91		94	92	90	89
5	102	97	93	90	101	96	93	90	95	91	89		93	90	88		92	89	88	87
6	100	94	90	87	99	93	90	87	92	89	86		91	88	86		90	87	85	84
7	97	91	87	84	96	91	87	84	90	86	84		88	86	83		88	85	83	82
8	95	89	85	82	94	88	84	82	87	84	82		86	83	81		86	83	81	80
9	92	86	82	80	92	86	82	80	85	82	79		84	81	79		84	81	79	78
10	90	84	80	78	90	84	80	78	83	80	77		82	79	77		82	79	77	76

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	484738	484738	484738
5°	472258	469008	465152
10°	398550	386309	380048
15°	240185	233463	237760
20°	81466	94075	108517
25°	14974	23468	27706
30°	5151	5727	6423
35°	1493	1850	1976
40°	405	652	540
45°	146	146	146
50°	161	0	161
55°	0	0	0
60°	0	0	0
65°	0	0	0
70°	0	0	0
75°	0	0	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 52.5°

Luminance: 170 cd/sqm

TEST NUMBER: P1326418

CATALOG NUMBER: LDSQA3D09R30W2N902765DE010 3LSQPHR1MB_6500K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	243.4	35.7
10°-20°	355.7	52.2
20°-30°	75.3	11.0
30°-40°	6.9	1.0
40°-50°	0.7	0.1
50°-60°	0.0	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	674.4	98.9
0°-40°	681.3	99.9
0°-60°	682.0	100.0
0°-90°	682.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	682.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2815	2815	2815	2815	2815	
5°	2732	2726	2713	2705	2691	247
15°	1347	1342	1309	1340	1334	355
25°	79	88	124	145	146	57
35°	7	9	9	11	9	6
45°	1	1	1	1	1	1
55°	0	0	0	0	0	0
65°	0	0	0	0	0	0
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	0

TEST NUMBER: P1326418

CATALOG NUMBER: LDSQA3D09R30W2N902765DE010 3LSQPHR1MB_6500K

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2814.6	2814.6	2814.6	2814.6	2814.6
1°	2815.2	2812.3	2808.2	2814.1	2809.9
2°	2809.3	2802.3	2796.4	2802.3	2800.5
3°	2791.7	2785.8	2781.7	2784.7	2784.7
4°	2765.3	2758.8	2755.3	2755.8	2747.0
5°	2731.7	2726.4	2712.9	2704.7	2690.6
6°	2682.3	2669.4	2652.9	2639.4	2621.2
7°	2615.3	2595.3	2571.8	2548.3	2525.4
8°	2507.7	2498.3	2466.6	2450.7	2427.8
9°	2406.6	2383.7	2349.6	2323.7	2311.3
10°	2279.0	2244.9	2209.0	2188.4	2173.2
11°	2127.9	2093.2	2064.4	2034.4	2010.9
12°	1950.3	1920.9	1888.0	1868.0	1840.4
13°	1739.8	1735.7	1698.7	1692.2	1688.7
14°	1559.3	1542.8	1506.4	1516.4	1518.7
15°	1347.1	1342.3	1309.4	1340.0	1333.5
17.5°	843.7	845.5	866.1	914.3	929.6
20°	444.5	458.0	513.3	571.5	592.1
22.5°	179.9	209.9	266.4	305.7	332.2
25°	78.8	88.2	123.5	145.2	145.8
27.5°	44.7	45.3	59.4	61.7	62.9
30°	25.9	26.5	28.8	30.6	32.3
32.5°	14.1	15.3	15.9	18.2	18.2
35°	7.1	8.8	8.8	10.6	9.4
37.5°	4.1	4.7	5.3	5.3	4.7
40°	1.8	2.4	2.9	2.9	2.4
42.5°	0.6	1.2	1.2	1.2	1.8
45°	0.6	0.6	0.6	0.6	0.6
47.5°	0.6	0.6	0.0	0.6	0.6
50°	0.6	0.0	0.0	0.0	0.6
52.5°	0.6	0.0	0.0	0.0	0.6
55°	0.0	0.0	0.0	0.0	0.0
57.5°	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0
62.5°	0.0	0.0	0.0	0.0	0.0
65°	0.0	0.0	0.0	0.0	0.0
67.5°	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1326418

CATALOG NUMBER: LDSQA3D09R30W2N902765DE010 3LSQPHR1MB_6500K

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)