

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P1327142

Luminaire Tested: LDSQA3D09R60W2N902765DE010 3LSQCDR1MW_6500K

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1327142
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2510-583-41)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LDSQA3D09R60W2N902765DE010 3LSQCDR1MW_6500K
Description: 3in Adjustable Tunable White LED luminaire with, R60 optic, 6500K CCT AND, 90CRI ,
3LSQCDR1MW TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 752.0 lumens
Efficiency: N/A
Efficacy: 83.6 lumens/watt
Spacing Criteria (0/90/45): 0.93 / 0.92 / 0.9
Luminous Opening: Rectangular (W 0.25' x L: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1327142

CATALOG NUMBER: LDSQA3D09R60W2N902765DE010 3LSQCDR1MW_6500K

Luminous Intensity Polar Plot

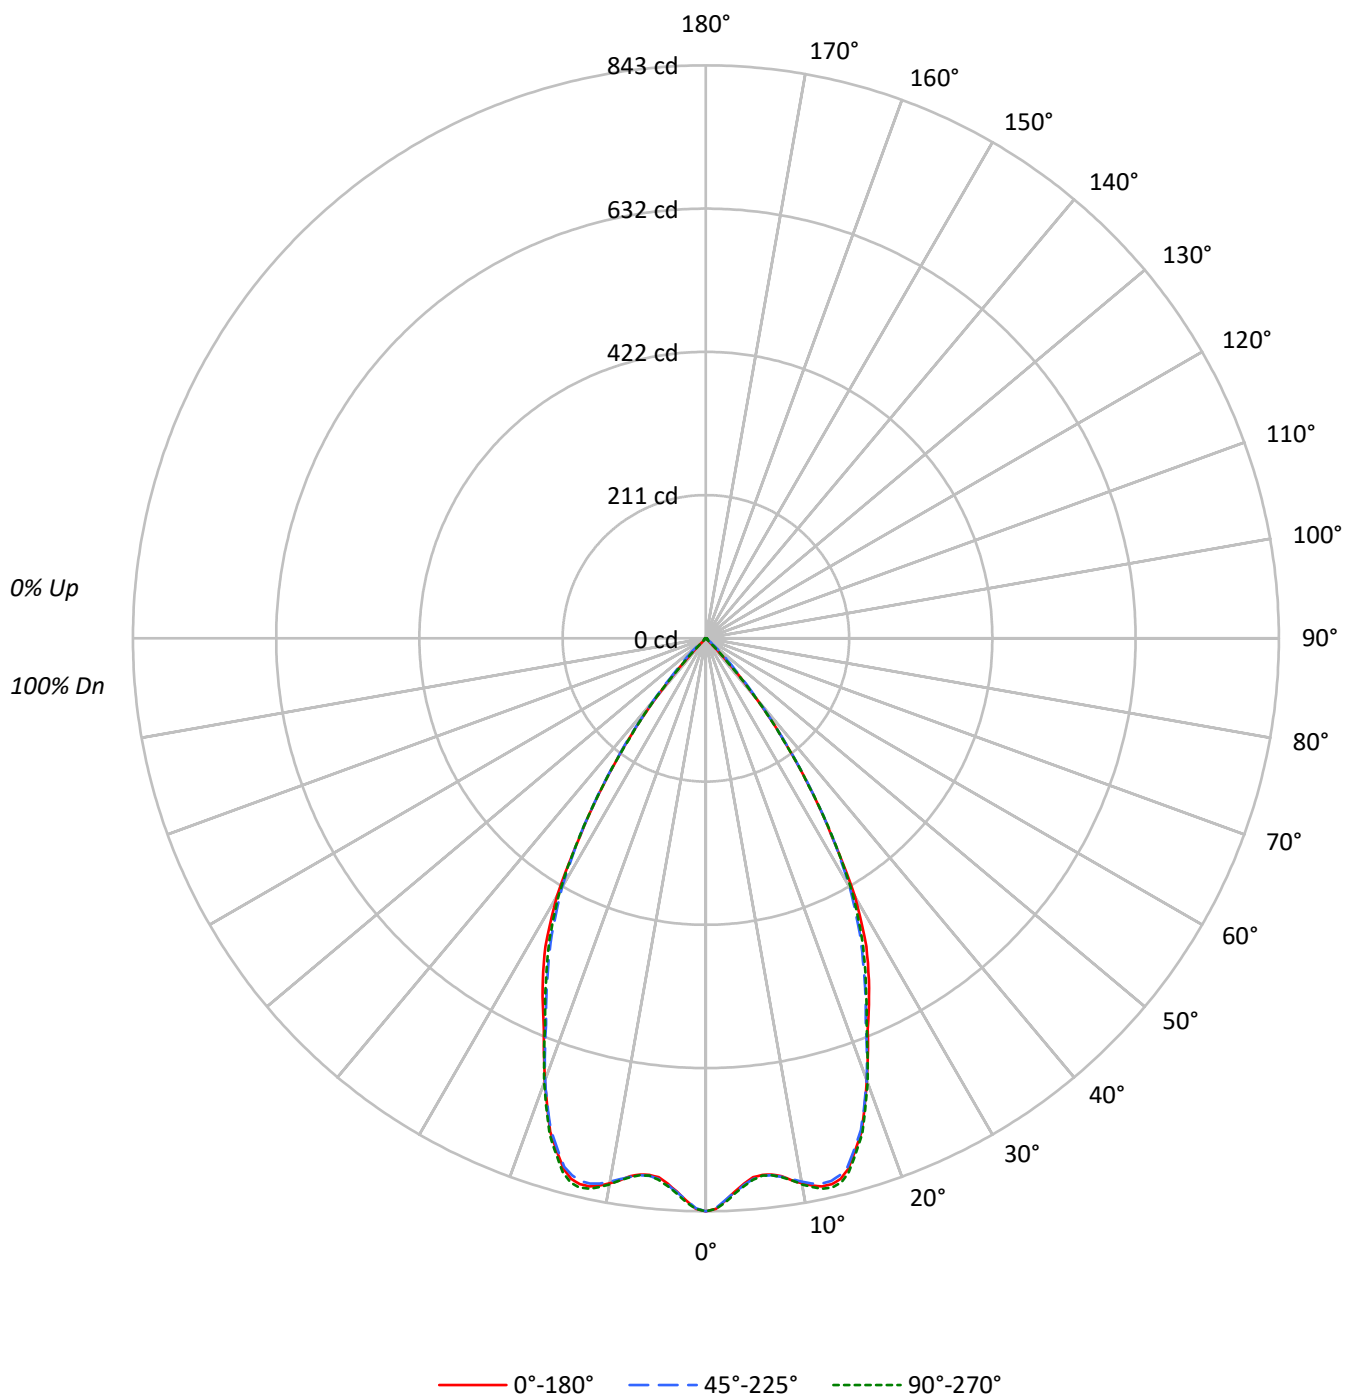

TEST NUMBER: P1327142

CATALOG NUMBER: LDSQA3D09R60W2N902765DE010 3LSQCDR1MW_6500K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				0
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		0
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		100
1	114	111	108	106	111	109	107	105	105	103	101		101	100	98		94
2	108	103	99	96	106	102	98	95	98	95	93		95	93	91		87
3	103	97	92	88	101	95	91	87	93	89	86		90	87	84		82
4	98	90	85	81	96	89	84	80	87	83	79		85	81	79		76
5	93	85	79	75	91	84	79	75	82	77	74		80	76	73		71
6	88	80	74	70	87	79	73	69	77	73	69		76	72	68		67
7	84	75	69	65	83	74	69	65	73	68	64		72	67	64		62
8	80	71	65	61	79	70	65	61	69	64	60		68	64	60		59
9	76	67	61	57	75	66	61	57	65	60	57		65	60	57		55
10	73	63	58	54	72	63	57	54	62	57	54		61	57	53		52

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	145201	145201	145201
5°	137613	138028	138235
10°	142404	141985	142702
15°	144136	143512	144974
20°	126918	126808	127450
25°	107992	104876	105769
30°	87163	84120	85532
35°	55168	55673	55042
40°	25787	26844	26192
45°	1583	9450	1851
50°	777	2197	777
55°	871	871	871
60°	827	827	827
65°	734	978	734
70°	906	906	906
75°	799	799	799
80°	595	595	595
85°	1186	1186	1186

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 45°

Vertical Angle: 45°

Luminance: 9450 cd/sqm

TEST NUMBER: P1327142

CATALOG NUMBER: LDSQA3D09R60W2N902765DE010 3LSQCDR1MW_6500K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	76.8	10.2
10°-20°	221.3	29.4
20°-30°	255.1	33.9
30°-40°	163.8	21.8
40°-50°	28.5	3.8
50°-60°	2.7	0.4
60°-70°	2.1	0.3
70°-80°	1.3	0.2
80°-90°	0.4	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	553.3	73.6
0°-40°	717.1	95.4
0°-60°	748.2	99.5
0°-90°	752.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	752.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	843	843	843	843	843	
5°	796	798	798	800	800	77
15°	808	805	805	810	813	222
25°	568	562	552	552	557	259
35°	262	261	265	260	262	164
45°	6	19	39	23	8	21
55°	3	3	3	3	3	3
65°	2	2	2	2	2	2
75°	1	1	1	1	1	1
85°	1	1	1	1	1	0
90°	0	0	0	0	0	

TEST NUMBER: P1327142

CATALOG NUMBER: LDSQA3D09R60W2N902765DE010 3LSQCDR1MW_6500K

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	843.1	843.1	843.1	843.1	843.1
1°	839.6	839.0	838.4	839.0	839.6
2°	827.8	827.2	826.6	829.0	830.2
3°	814.9	815.4	816.0	817.2	817.8
4°	804.3	805.4	806.0	807.2	807.8
5°	796.0	797.8	798.4	800.2	799.6
6°	793.7	794.9	795.4	796.0	794.9
7°	794.9	795.4	796.0	797.2	796.0
8°	799.0	799.6	800.2	800.7	800.7
9°	807.2	806.0	805.4	807.8	807.2
10°	814.3	812.5	811.9	815.4	816.0
11°	820.2	817.8	817.2	821.3	822.5
12°	824.3	820.7	820.2	825.4	827.8
13°	824.3	819.6	819.6	825.4	829.0
14°	819.6	814.3	814.3	820.7	824.9
15°	808.4	805.4	804.9	810.2	813.1
17.5°	761.3	757.8	758.4	764.3	764.8
20°	692.5	690.7	691.9	693.1	695.4
22.5°	622.5	621.3	614.8	616.6	617.8
25°	568.3	561.9	551.9	552.5	556.6
27.5°	511.3	504.8	490.7	493.6	497.7
30°	438.3	433.0	423.0	424.8	430.1
32.5°	344.2	354.8	345.4	348.3	346.5
35°	262.4	260.6	264.8	259.5	261.8
37.5°	184.7	185.3	187.1	182.4	182.4
40°	114.7	117.7	119.4	117.1	116.5
42.5°	48.2	65.9	69.4	65.9	48.8
45°	6.5	19.4	38.8	22.9	7.6
47.5°	2.9	4.1	20.6	4.1	2.9
50°	2.9	2.9	8.2	2.9	2.9
52.5°	2.9	2.9	2.9	2.9	2.9
55°	2.9	2.9	2.9	2.9	2.9
57.5°	2.9	2.9	2.9	2.9	2.9
60°	2.4	2.4	2.4	2.4	2.4
62.5°	2.4	2.4	2.4	2.4	2.4
65°	1.8	2.4	2.4	2.4	1.8
67.5°	1.8	1.8	1.8	1.8	1.8
70°	1.8	1.8	1.8	1.8	1.8
72.5°	1.2	1.2	1.2	1.2	1.2
75°	1.2	1.2	1.2	1.2	1.2
77.5°	1.2	1.2	1.2	1.2	1.2
80°	0.6	0.6	0.6	0.6	0.6
82.5°	0.6	0.6	0.6	0.6	0.6
85°	0.6	0.6	0.6	0.6	0.6
87.5°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1327142

CATALOG NUMBER: LDSQA3D09R60W2N902765DE010 3LSQCDR1MW_6500K

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)