

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P#

Luminaire Tested: LDSQRT3D13R129050DE010 3LSQPHUSR1MW

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P#  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2501-338-24)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: LDSQRT3D13R129050DE010 3LSQPHUSR1MW  
Description: 3in Adjustable LED luminaire with, R12 optic, 5000K CCT AND, 90CRI , 3LSQPHUSR1MW TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1215.0 lumens  
Efficiency: N/A  
Efficacy: 78.4 lumens/watt  
Spacing Criteria (0/90/45): 0.22 / 0.22 / 0.22  
Luminous Opening: Rectangular (W 0.25' x L: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 15.5  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P#  
CATALOG NUMBER: LDSQRT3D13R129050DE010 3LSQPHUSR1MW

### Luminous Intensity Polar Plot

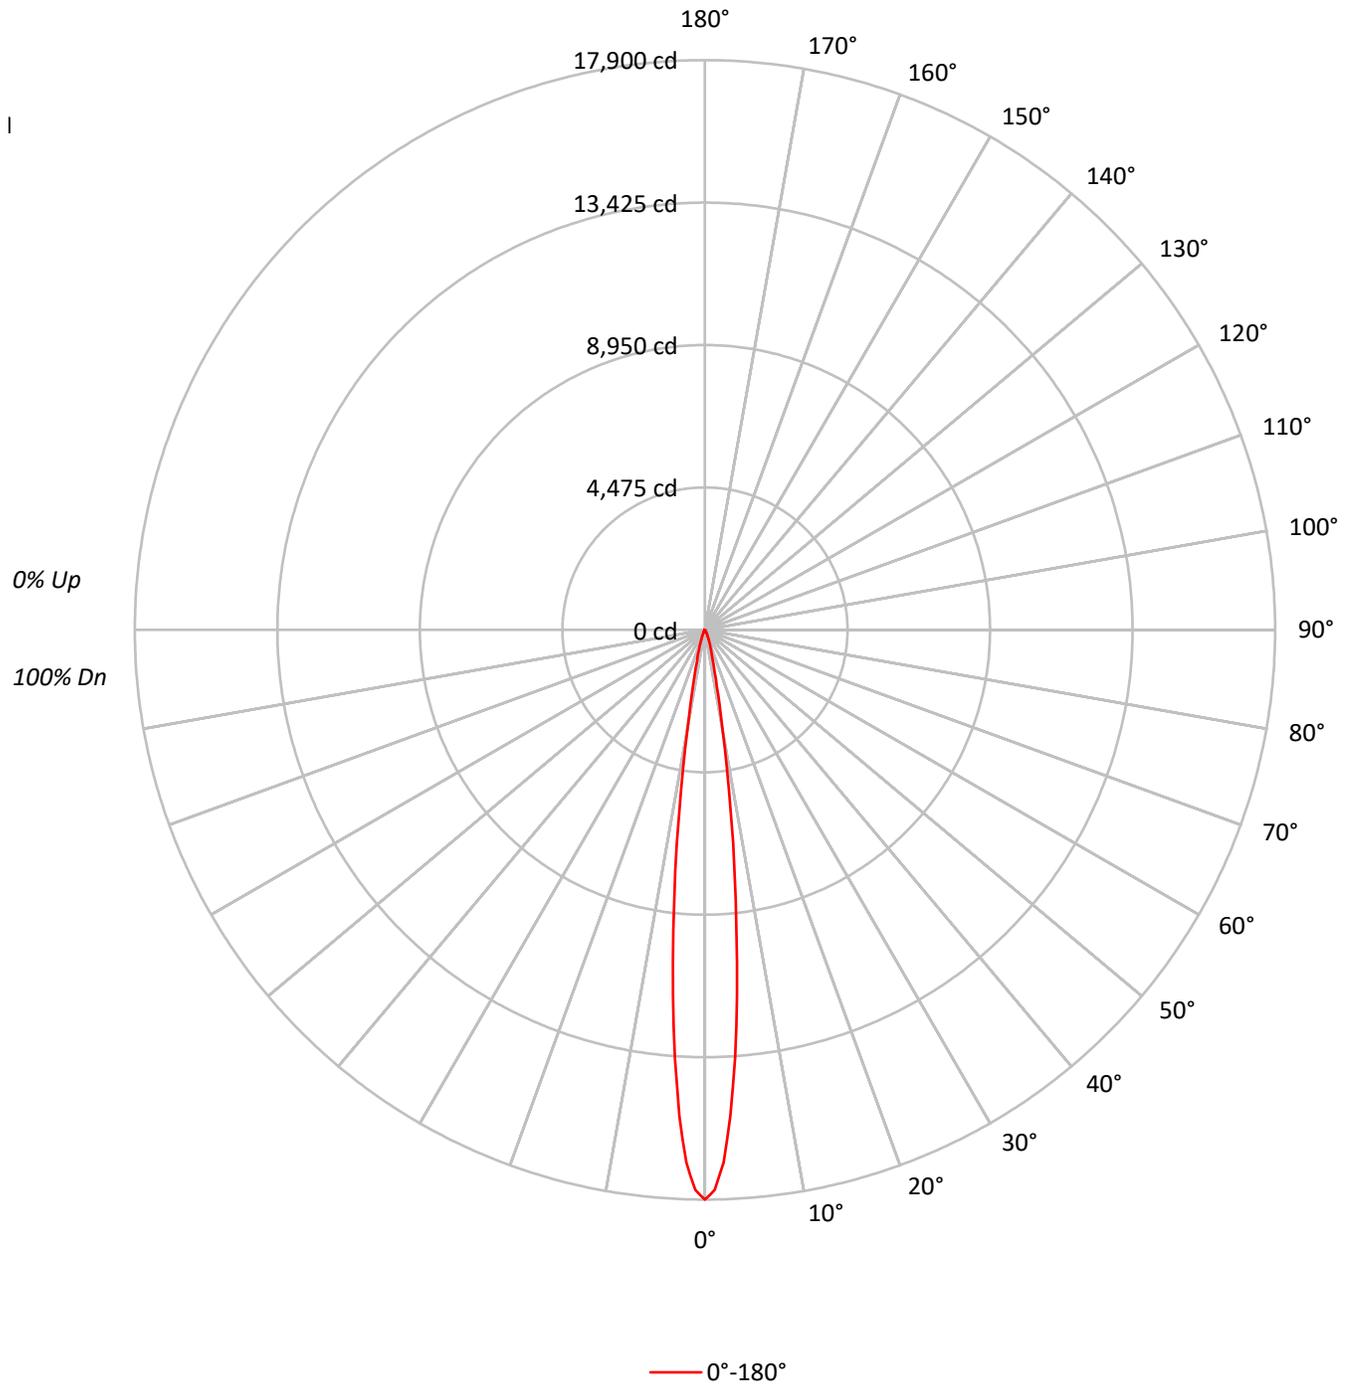



TEST NUMBER: P#  
 CATALOG NUMBER: LDSQRT3D13R129050DE010 3LSQPHUSR1MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	116	114	113	111	114	112	111	109	108	107	106	104	104	103	101	101	100	98	98	98	98
2	113	110	108	106	111	108	106	104	105	104	102	103	101	100	100	99	98	97	97	97	97
3	110	107	104	102	109	105	103	101	103	101	99	101	99	98	99	98	96	95	95	95	95
4	108	104	101	98	107	103	100	98	101	99	97	99	97	96	98	96	95	94	94	94	94
5	106	102	98	96	105	101	98	96	99	97	95	98	96	94	97	95	93	92	92	92	92
6	104	99	96	94	103	99	96	94	98	95	93	96	94	93	95	93	92	91	91	91	91
7	102	98	94	92	101	97	94	92	96	93	92	95	93	91	94	92	91	90	90	90	90
8	101	96	93	91	100	95	93	90	95	92	90	94	92	90	93	91	90	89	89	89	89
9	99	94	91	89	98	94	91	89	93	91	89	93	90	89	92	90	88	88	88	88	88
10	98	93	90	88	97	93	90	88	92	90	88	91	89	88	91	89	87	87	87	87	87

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	3082751
5°	1991860
10°	562010
15°	158899
20°	66437
25°	29416
30°	15014
35°	7947
40°	3395
45°	926
50°	1018
55°	0
60°	0
65°	0
70°	0
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 50°  
 Luminance: 1018 cd/sqm



TEST NUMBER: P#  
 CATALOG NUMBER: LDSQRT3D13R129050DE010 3LSQPHUSR1MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	811.8	66.8
10°-20°	294.5	24.2
20°-30°	78.8	6.5
30°-40°	24.8	2.0
40°-50°	4.7	0.4
50°-60°	0.4	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1185.1	97.5
0°-40°	1209.9	99.6
0°-60°	1215.0	100.0
0°-90°	1215.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1215.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	17900	
5°	11522	812
15°	891	295
25°	155	79
35°	38	25
45°	4	5
55°	0	0
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P#  
CATALOG NUMBER: LDSQRT3D13R129050DE010 3LSQPHUSR1MW

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	17899.8
1°	17597.7
2°	16748.1
3°	15294.2
4°	13489.1
5°	11521.6
6°	9471.1
7°	7635.8
8°	5876.0
9°	4373.0
10°	3213.7
11°	2367.8
12°	1782.4
13°	1382.1
14°	1095.1
15°	891.2
17.5°	566.5
20°	362.5
22.5°	234.1
25°	154.8
27.5°	105.7
30°	75.5
32.5°	52.9
35°	37.8
37.5°	26.4
40°	15.1
42.5°	7.6
45°	3.8
47.5°	3.8
50°	3.8
52.5°	0.0
55°	0.0
57.5°	0.0
60°	0.0
62.5°	0.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0



TEST NUMBER: P#  
CATALOG NUMBER: LDSQRT3D13R129050DE010 3LSQPHUSR1MW

CANDELA DISTRIBUTION (continued):

0°  
90° | 0.0

(END OF REPORT)