

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P751122

Luminaire Tested: LD4D60D010-EU4DR6055659024-4LBS1LI

Issue Date: 1/30/2024

Test Information

Test Method: LM-79-2019
Report Number: P751122
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-60)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/30/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D60D010-EU4DR6055659024-4LBS1LI
Description: 4 INCH ROUND SHALLOW SPECULAR CLEAR TRIM, WITH 60° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5714.5 lumens
Efficiency: N/A
Efficacy: 88.7 lumens/watt
Spacing Criteria (0/90/45): 0.98 / 0.98 / 0.92
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 64.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P751122

CATALOG NUMBER: LD4D60D010-EU4DR6055659024-4LBS1LI

Luminous Intensity Polar Plot

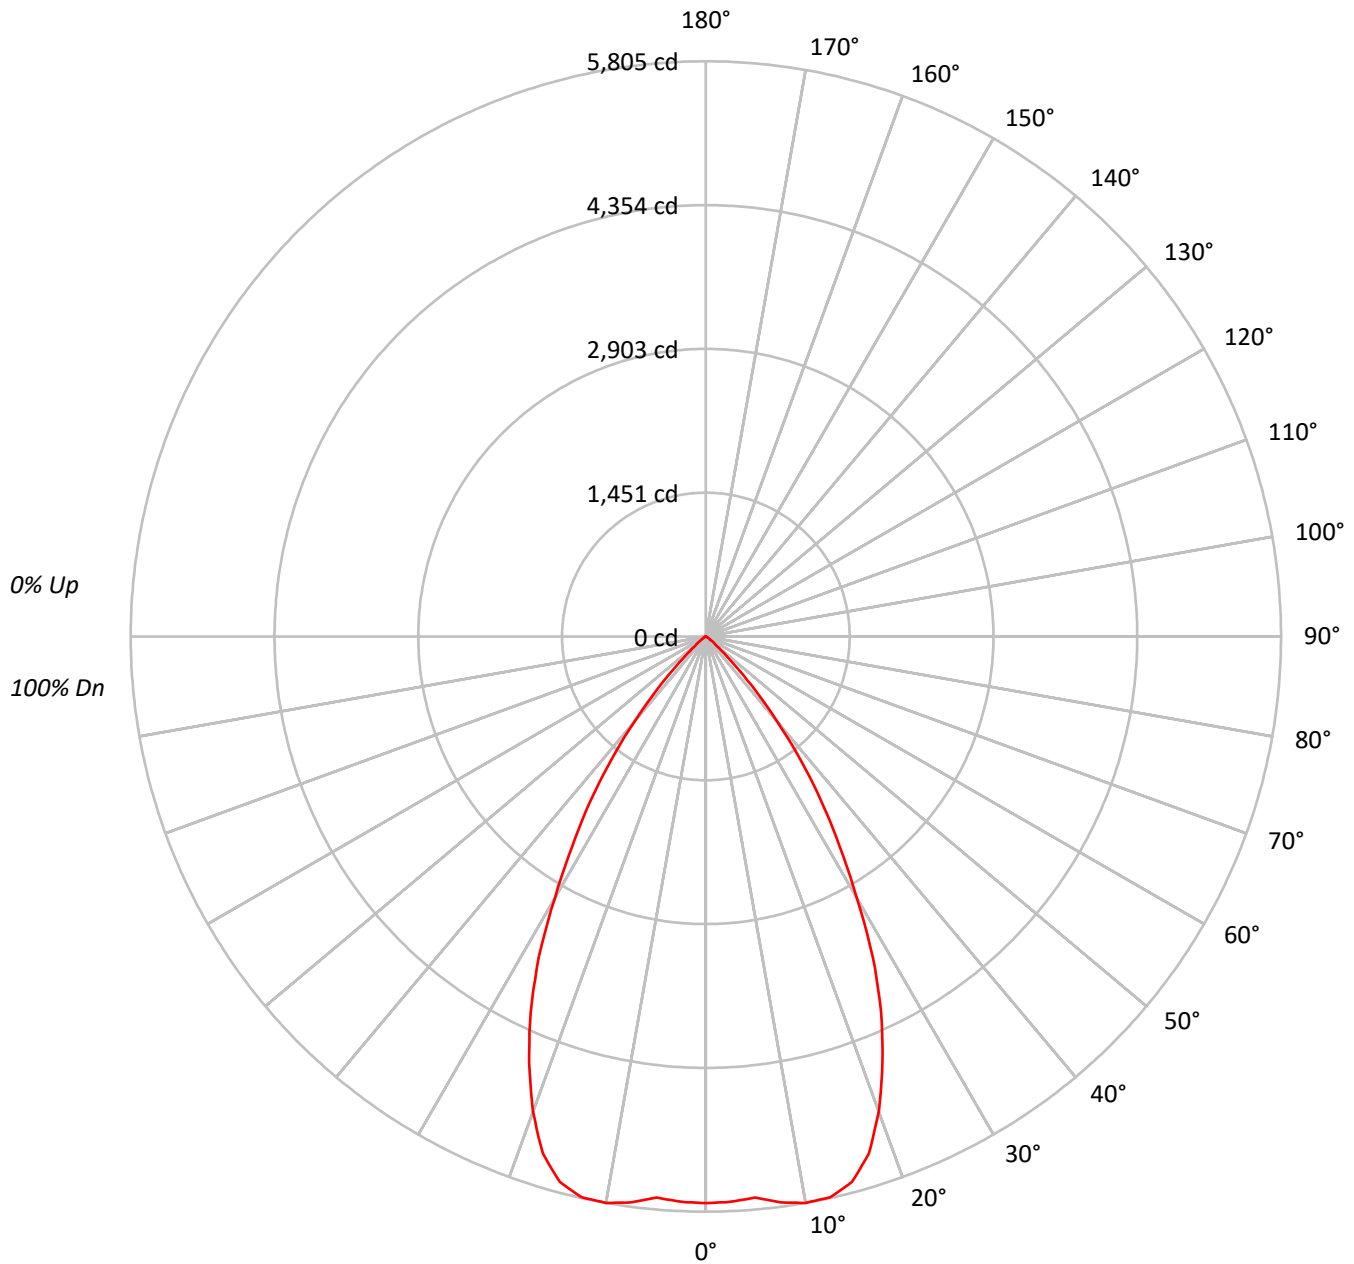



TEST NUMBER: P751122

CATALOG NUMBER: LD4D60D010-EU4DR6055659024-4LBS1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	114	111	108	106		111	109	106	104		105	103	101		101	99	98		97	96	95
2	108	103	99	96		106	101	98	95		98	95	92		95	93	90		92	90	89
3	102	96	91	87		100	95	90	86		92	88	85		90	86	84		87	85	82
4	97	90	84	80		95	88	83	79		86	82	78		84	81	78		82	79	77
5	92	84	78	74		91	83	77	73		81	76	73		79	75	72		78	74	71
6	87	79	73	68		86	78	72	68		76	71	68		75	70	67		74	70	67
7	83	74	68	63		82	73	67	63		72	67	63		71	66	63		69	65	62
8	79	69	63	59		78	69	63	59		68	63	59		67	62	59		66	61	58
9	75	65	59	55		74	65	59	55		64	59	55		63	58	55		62	58	55
10	72	62	56	52		71	61	56	52		61	55	52		60	55	52		59	55	52

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	624829
5°	623301
10°	644010
15°	644665
20°	593166
25°	504526
30°	384433
35°	271861
40°	159631
45°	64419
50°	21502
55°	10344
60°	4261
65°	620
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 64419 cd/sqm

TEST NUMBER: P751122

CATALOG NUMBER: LD4D60D010-EU4DR6055659024-4LBS1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	548.2	9.6
10°-20°	1578.9	27.6
20°-30°	1889.7	33.1
30°-40°	1263.9	22.1
40°-50°	374.7	6.6
50°-60°	53.9	0.9
60°-70°	5.1	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4016.8	70.3
0°-40°	5280.8	92.4
0°-60°	5709.4	99.9
0°-90°	5714.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5714.5	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	5719	
5°	5683	548
15°	5699	1579
25°	4185	1890
35°	2038	1264
45°	417	375
55°	54	54
65°	2	5
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P751122

CATALOG NUMBER: LD4D60D010-EU4DR6055659024-4LBS1LI

CANDELA DISTRIBUTION (FULL):

	0°
0°	5718.7
2.5°	5711.4
5°	5683.0
7.5°	5760.1
10°	5804.7
12.5°	5796.6
15°	5699.2
17.5°	5469.7
20°	5101.5
22.5°	4659.5
25°	4185.0
27.5°	3650.5
30°	3047.1
32.5°	2508.6
35°	2038.2
37.5°	1566.9
40°	1119.2
42.5°	738.1
45°	416.9
47.5°	213.3
50°	126.5
52.5°	81.9
55°	54.3
57.5°	34.9
60°	19.5
62.5°	8.1
65°	2.4
67.5°	0.8
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-T8S5UU9





— 0°-180°







(END OF REPORT)