

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P750896

Luminaire Tested: LD4D60D010-EU4DR4555659027-4LBDP1H

Issue Date: 1/30/2024

Test Information

Test Method: LM-79-2019
Report Number: P750896
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-36)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/30/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D60D010-EU4DR4555659027-4LBDP1H
Description: 4 INCH ROUND DEEP 45° CUTOFF SEMI-SPECULAR CLEAR TRIM, WITH 45° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5981.6 lumens
Efficiency: N/A
Efficacy: 92.9 lumens/watt
Spacing Criteria (0/90/45): 0.75 / 0.75 / 0.69
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 64.4
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P750896

CATALOG NUMBER: LD4D60D010-EU4DR4555659027-4LBDP1H

Luminous Intensity Polar Plot

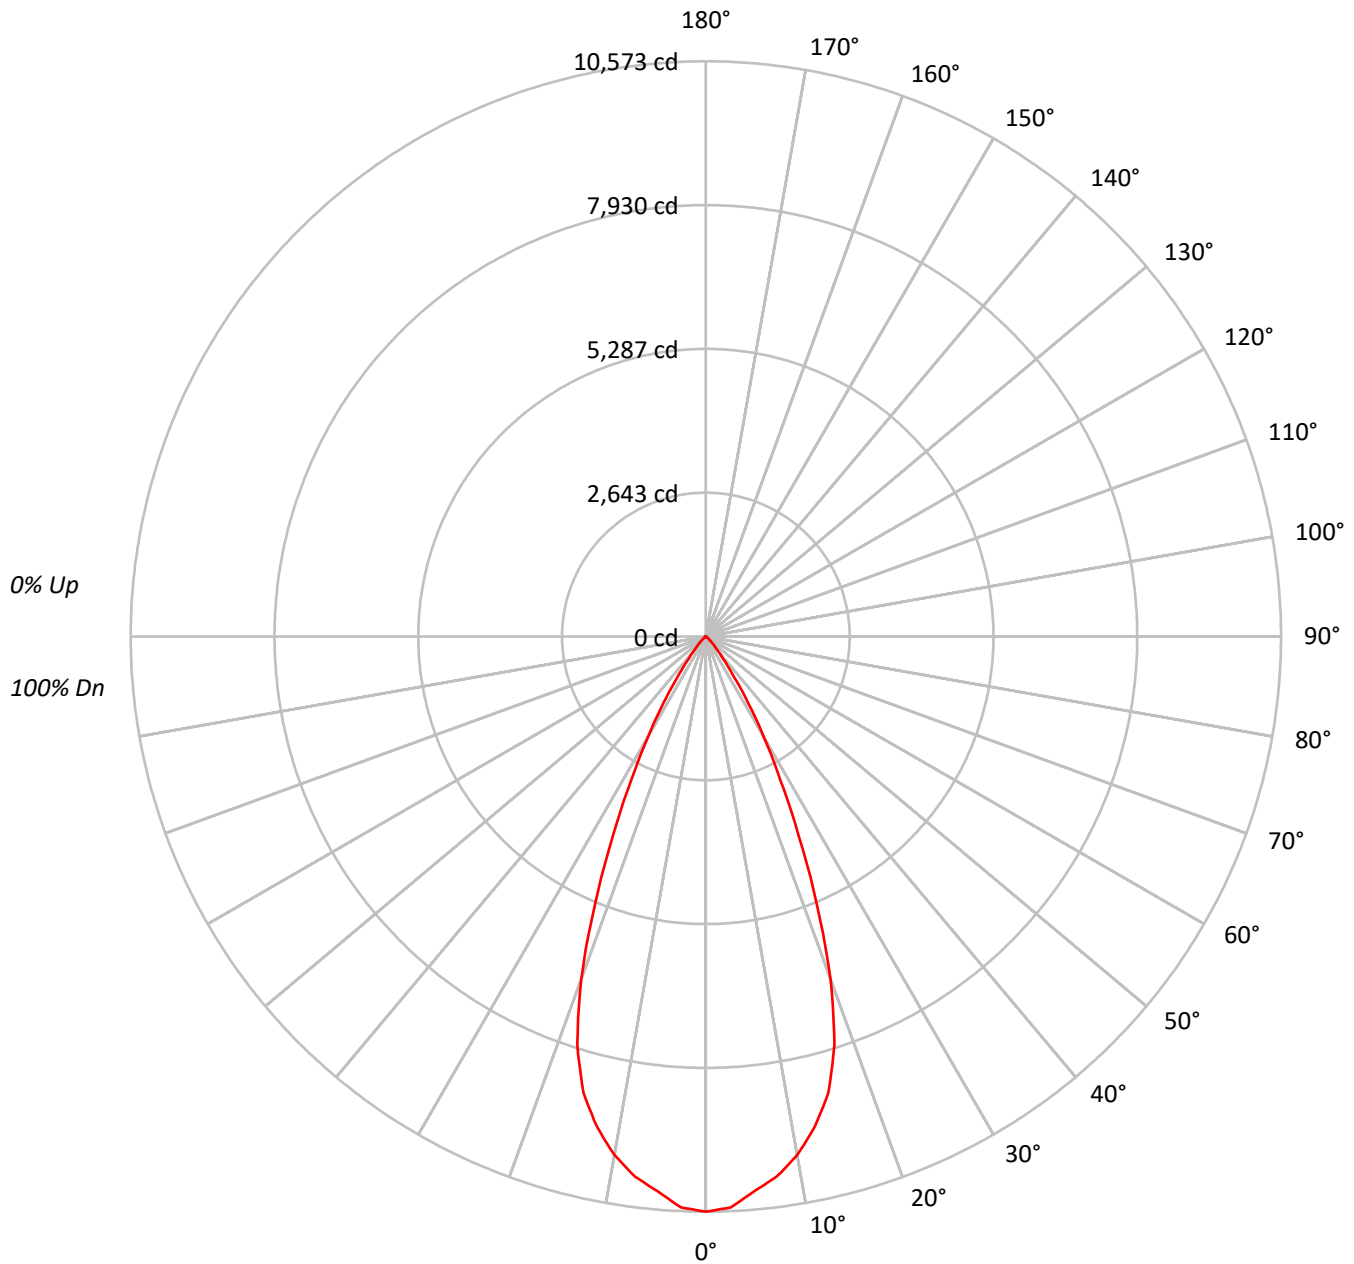

TEST NUMBER: P750896

CATALOG NUMBER: LD4D60D010-EU4DR4555659027-4LBDP1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	98	98	97	95		
2	109	105	102	99	107	103	100	98	100	98	95	97	95	93	95	93	91	90		
3	105	99	95	91	103	98	94	91	95	92	89	93	90	88	91	89	87	85		
4	100	94	89	85	99	93	88	85	91	87	84	89	86	83	87	84	82	81		
5	96	89	84	80	95	88	83	80	86	82	79	85	81	79	83	80	78	77		
6	92	85	80	76	91	84	79	76	83	78	75	81	77	75	80	77	74	73		
7	89	81	75	72	87	80	75	72	79	74	71	78	74	71	77	73	71	69		
8	85	77	72	68	84	76	71	68	75	71	68	74	70	67	73	70	67	66		
9	82	73	68	65	81	73	68	65	72	68	65	71	67	64	71	67	64	63		
10	79	70	65	62	78	70	65	62	69	65	62	68	64	61	68	64	61	60		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1155170
5°	1122281
10°	1073716
15°	982676
20°	779610
25°	486720
30°	268261
35°	120458
40°	47439
45°	22359
50°	10607
55°	5543
60°	2732
65°	646
70°	256
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 22359 cd/sqm



TEST NUMBER: P750896

CATALOG NUMBER: LD4D60D010-EU4DR4555659027-4LBDP1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	961.4	16.1
10°-20°	2366.2	39.6
20°-30°	1873.8	31.3
30°-40°	624.0	10.4
40°-50°	123.8	2.1
50°-60°	28.1	0.5
60°-70°	4.1	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	5201.5	87.0
0°-40°	5825.5	97.4
0°-60°	5977.4	99.9
0°-90°	5981.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5981.6	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	10573	
5°	10232	961
15°	8687	2366
25°	4037	1874
35°	903	624
45°	145	124
55°	29	28
65°	2	4
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P750896

CATALOG NUMBER: LD4D60D010-EU4DR4555659027-4LBDP1H

CANDELA DISTRIBUTION (FULL):

	0°
0°	10572.6
2.5°	10503.6
5°	10232.5
7.5°	10008.8
10°	9677.8
12.5°	9237.1
15°	8687.4
17.5°	7860.8
20°	6705.0
22.5°	5327.9
25°	4037.3
27.5°	2956.2
30°	2126.3
32.5°	1446.1
35°	903.1
37.5°	535.5
40°	332.6
42.5°	218.7
45°	144.7
47.5°	93.1
50°	62.4
52.5°	41.6
55°	29.1
57.5°	19.1
60°	12.5
62.5°	6.7
65°	2.5
67.5°	0.8
70°	0.8
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-T8S5UU9





— 0°-180°







(END OF REPORT)