

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P751212

Luminaire Tested: LD4D60D010-EU4DR6555659027-4LBS1H

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P751212
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-147)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D60D010-EU4DR6555659027-4LBS1H
Description: 4 INCH ROUND SHALLOW SEMI-SPECULAR CLEAR TRIM, WITH 65° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5386.8 lumens
Efficiency: N/A
Efficacy: 83.6 lumens/watt
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.96
Luminous Opening: Circular (Dia: 0.48' x H: 0')
CIE Type: Direct

Input Watts (W): 64.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P751212

CATALOG NUMBER: LD4D60D010-EU4DR6555659027-4LBS1H

Luminous Intensity Polar Plot

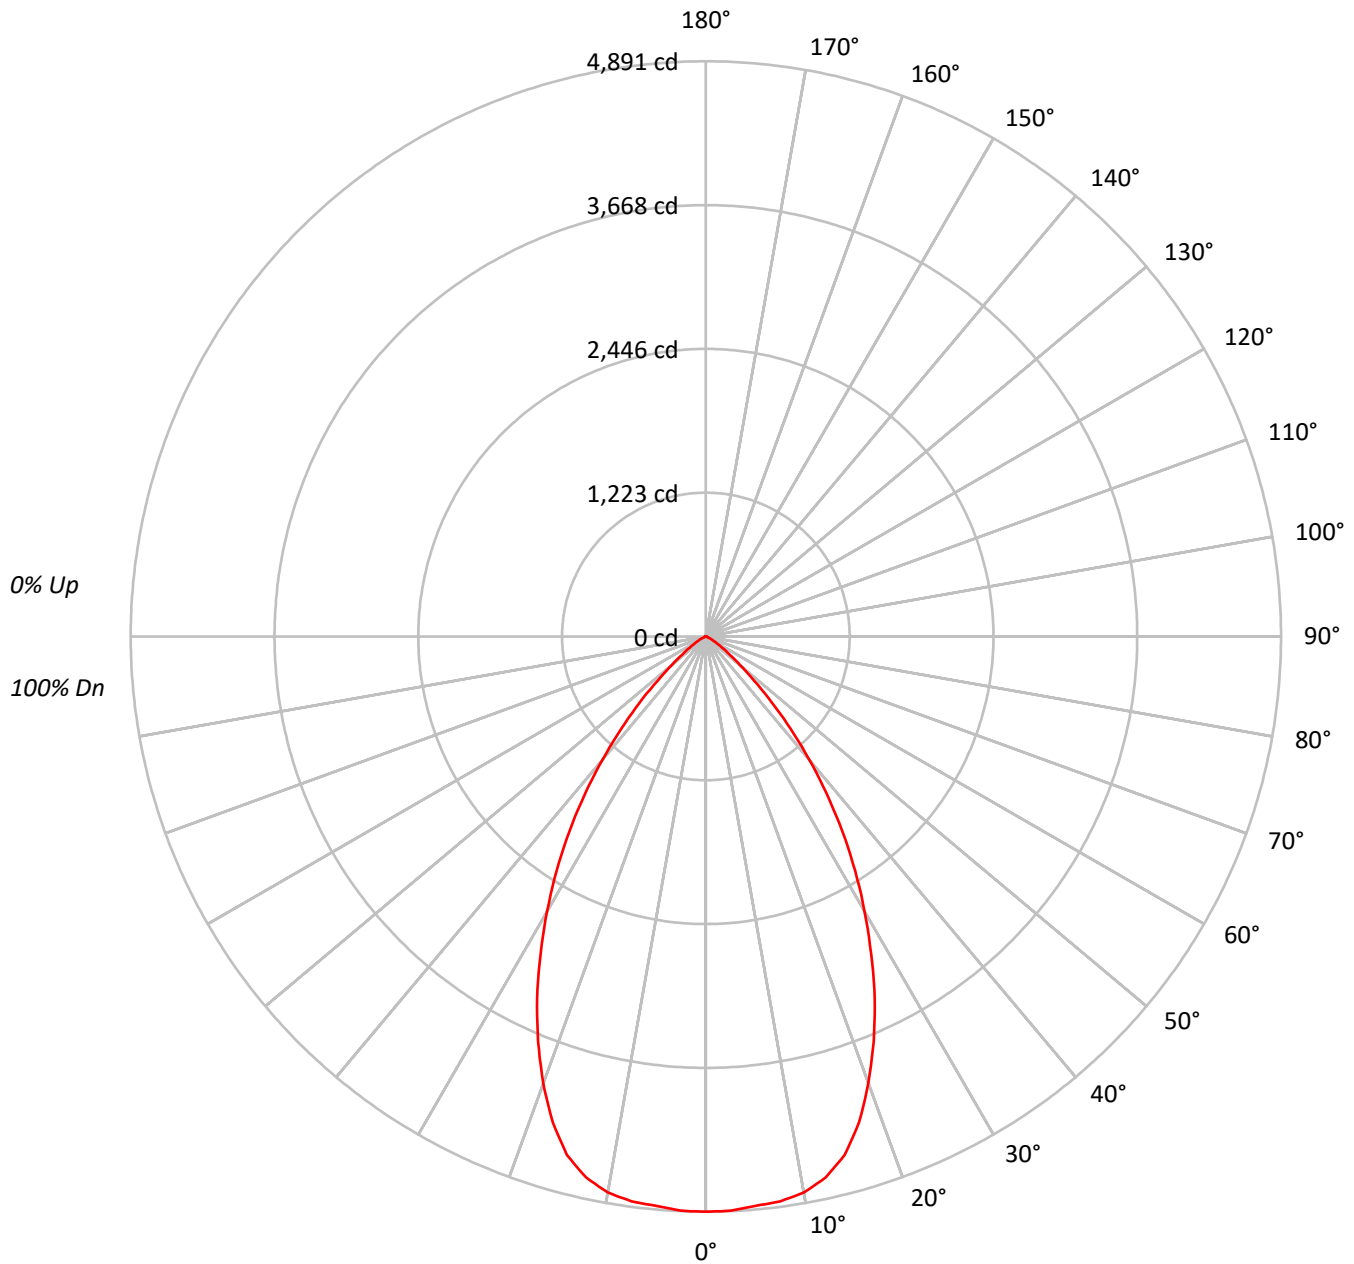



TEST NUMBER: P751212

CATALOG NUMBER: LD4D60D010-EU4DR6555659027-4LBS1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	110	107	105	111	108	105	103	104	102	100		100	99	97		97
2	107	102	97	94	105	100	96	92	97	93	90		94	91	88		91
3	101	94	88	84	99	92	87	83	90	86	82		87	84	81		85
4	95	87	81	76	93	86	80	76	84	79	75		82	77	74		80
5	90	81	74	70	88	80	74	69	78	73	69		76	72	68		75
6	85	75	69	64	83	74	68	64	73	67	63		71	67	63		70
7	80	70	64	59	79	69	63	59	68	63	59		67	62	58		66
8	76	66	59	55	75	65	59	55	64	58	54		63	58	54		62
9	72	61	55	51	71	61	55	51	60	54	51		59	54	50		58
10	68	58	52	47	67	57	51	47	57	51	47		56	51	47		55

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	285659
5°	284939
10°	284693
15°	275916
20°	251188
25°	218895
30°	182058
35°	144257
40°	104114
45°	65779
50°	34282
55°	18227
60°	9567
65°	5265
70°	2203
75°	2437
80°	1682
85°	1474

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 65779 cd/sqm



TEST NUMBER: P751212

CATALOG NUMBER: LD4D60D010-EU4DR6555659027-4LBS1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	462.5	8.6
10°-20°	1266.6	23.5
20°-30°	1548.2	28.7
30°-40°	1256.2	23.3
40°-50°	626.0	11.6
50°-60°	174.6	3.2
60°-70°	39.7	0.7
70°-80°	10.3	0.2
80°-90°	2.6	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3277.4	60.8
0°-40°	4533.6	84.2
0°-60°	5334.2	99.0
0°-90°	5386.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5386.8	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	4891	
5°	4860	463
15°	4563	1267
25°	3397	1548
35°	2023	1256
45°	796	626
55°	179	175
65°	38	40
75°	11	10
85°	2	3
90°	0	



TEST NUMBER: P751212

CATALOG NUMBER: LD4D60D010-EU4DR6555659027-4LBS1H

CANDELA DISTRIBUTION (FULL):

0°	
0°	4891.1
2.5°	4887.5
5°	4860.2
7.5°	4844.4
10°	4800.5
12.5°	4711.4
15°	4563.3
17.5°	4331.9
20°	4041.5
22.5°	3728.1
25°	3396.8
27.5°	3042.5
30°	2699.6
32.5°	2361.1
35°	2023.3
37.5°	1686.2
40°	1365.6
42.5°	1065.2
45°	796.4
47.5°	554.9
50°	377.3
52.5°	260.2
55°	179.0
57.5°	120.7
60°	81.9
62.5°	56.8
65°	38.1
67.5°	19.4
70°	12.9
72.5°	12.2
75°	10.8
77.5°	7.2
80°	5.0
82.5°	3.6
85°	2.2
87.5°	1.4
90°	0.0



Report Generated By 670245859 / DESKTOP-T8S5UU9





— 0°-180°







(END OF REPORT)