

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P750758

Luminaire Tested: LD4D60D010-EU4DR3555659030-4LBS1LI

Issue Date: 1/30/2024

Test Information

Test Method: LM-79-2019
Report Number: P750758
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-20)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/30/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D60D010-EU4DR3555659030-4LBS1LI
Description: 4 INCH ROUND SHALLOW SPECULAR CLEAR TRIM, WITH 35° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6351.9 lumens
Efficiency: N/A
Efficacy: 98.6 lumens/watt
Spacing Criteria (0/90/45): 0.6 / 0.6 / 0.54
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 64.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P750758

CATALOG NUMBER: LD4D60D010-EU4DR3555659030-4LBS1LI

Luminous Intensity Polar Plot

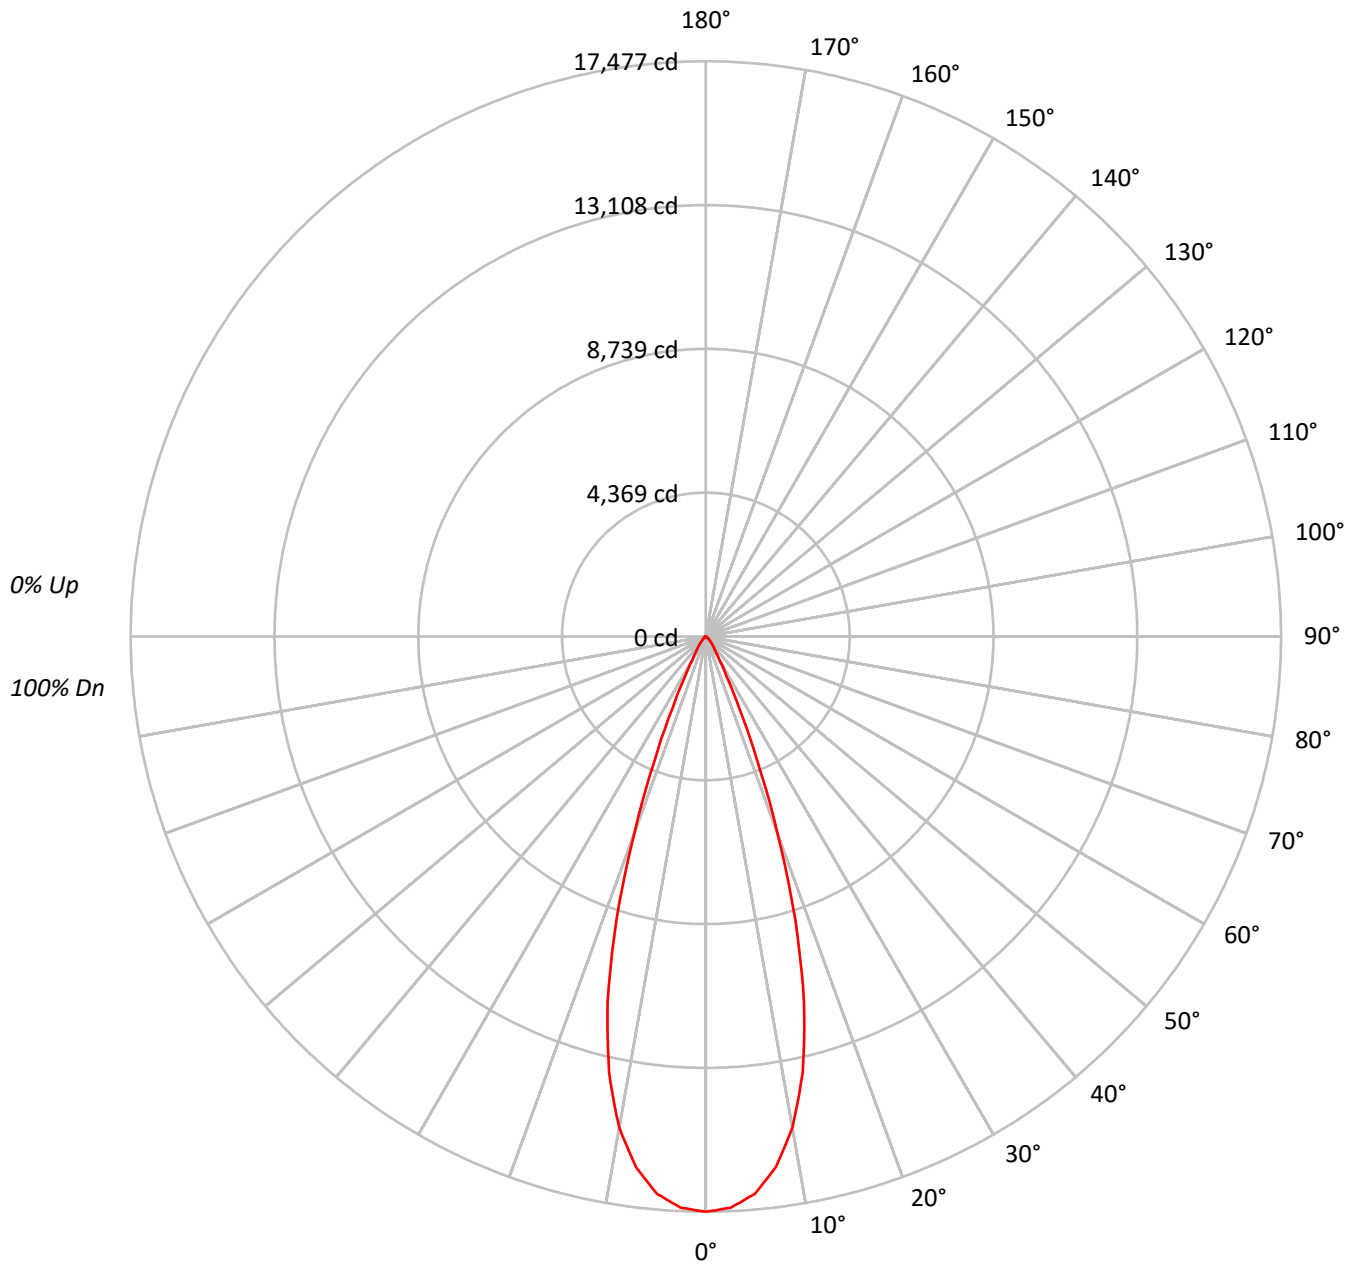



TEST NUMBER: P750758

CATALOG NUMBER: LD4D60D010-EU4DR3555659030-4LBS1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	115	112	110	108	112	110	108	107	106	105	103		103	101	100		99
2	110	106	103	101	108	105	102	99	102	99	97		99	97	95		96
3	106	101	97	94	105	100	96	93	97	95	92		95	93	91		93
4	103	97	92	89	101	96	92	89	94	90	88		92	89	87		90
5	99	93	88	85	98	92	87	84	90	86	84		89	85	83		87
6	96	89	84	81	94	88	84	81	87	83	80		85	82	80		84
7	93	85	81	78	91	85	80	77	84	80	77		83	79	77		82
8	90	82	78	74	88	82	77	74	81	77	74		80	76	74		79
9	87	79	75	72	86	79	75	72	78	74	71		77	74	71		77
10	84	77	72	69	83	76	72	69	76	72	69		75	71	69		74

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1909561
5°	1864692
10°	1680581
15°	1304398
20°	739833
25°	287827
30°	107378
35°	58862
40°	38467
45°	23409
50°	14907
55°	10534
60°	7714
65°	4188
70°	319
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 23409 cd/sqm

TEST NUMBER: P750758

CATALOG NUMBER: LD4D60D010-EU4DR3555659030-4LBS1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1563.6	24.6
10°-20°	3052.9	48.1
20°-30°	1245.1	19.6
30°-40°	298.0	4.7
40°-50°	124.2	2.0
50°-60°	51.4	0.8
60°-70°	16.1	0.3
70°-80°	0.4	0.0
80°-90°	0.3	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	5861.6	92.3
0°-40°	6159.6	97.0
0°-60°	6335.1	99.7
0°-90°	6351.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6351.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	17477	
5°	17002	###
15°	11532	3053
25°	2388	1245
35°	441	298
45°	152	124
55°	55	51
65°	16	16
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P750758

CATALOG NUMBER: LD4D60D010-EU4DR3555659030-4LBS1LI

CANDELA DISTRIBUTION (FULL):

	0°
0°	17477.1
2.5°	17372.2
5°	17001.5
7.5°	16261.9
10°	15147.7
12.5°	13578.9
15°	11531.6
17.5°	9027.8
20°	6362.9
22.5°	4057.4
25°	2387.5
27.5°	1349.6
30°	851.1
32.5°	597.6
35°	441.3
37.5°	341.2
40°	269.7
42.5°	207.8
45°	151.5
47.5°	113.4
50°	87.7
52.5°	69.6
55°	55.3
57.5°	44.8
60°	35.3
62.5°	25.7
65°	16.2
67.5°	5.7
70°	1.0
72.5°	1.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	1.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-T8S5UU9





— 0°-180°







(END OF REPORT)