

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P751227

Luminaire Tested: LD4D60D010-EU4DR6555659030-4LBS1MW

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P751227
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-147)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D60D010-EU4DR6555659030-4LBS1MW
Description: 4 INCH ROUND SHALLOW MATTE WHITE TRIM, WITH 65° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5273.4 lumens
Efficiency: N/A
Efficacy: 81.9 lumens/watt
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.96
Luminous Opening: Circular (Dia: 0.48' x H: 0')
CIE Type: Direct

Input Watts (W): 64.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P751227

CATALOG NUMBER: LD4D60D010-EU4DR6555659030-4LBS1MW

Luminous Intensity Polar Plot

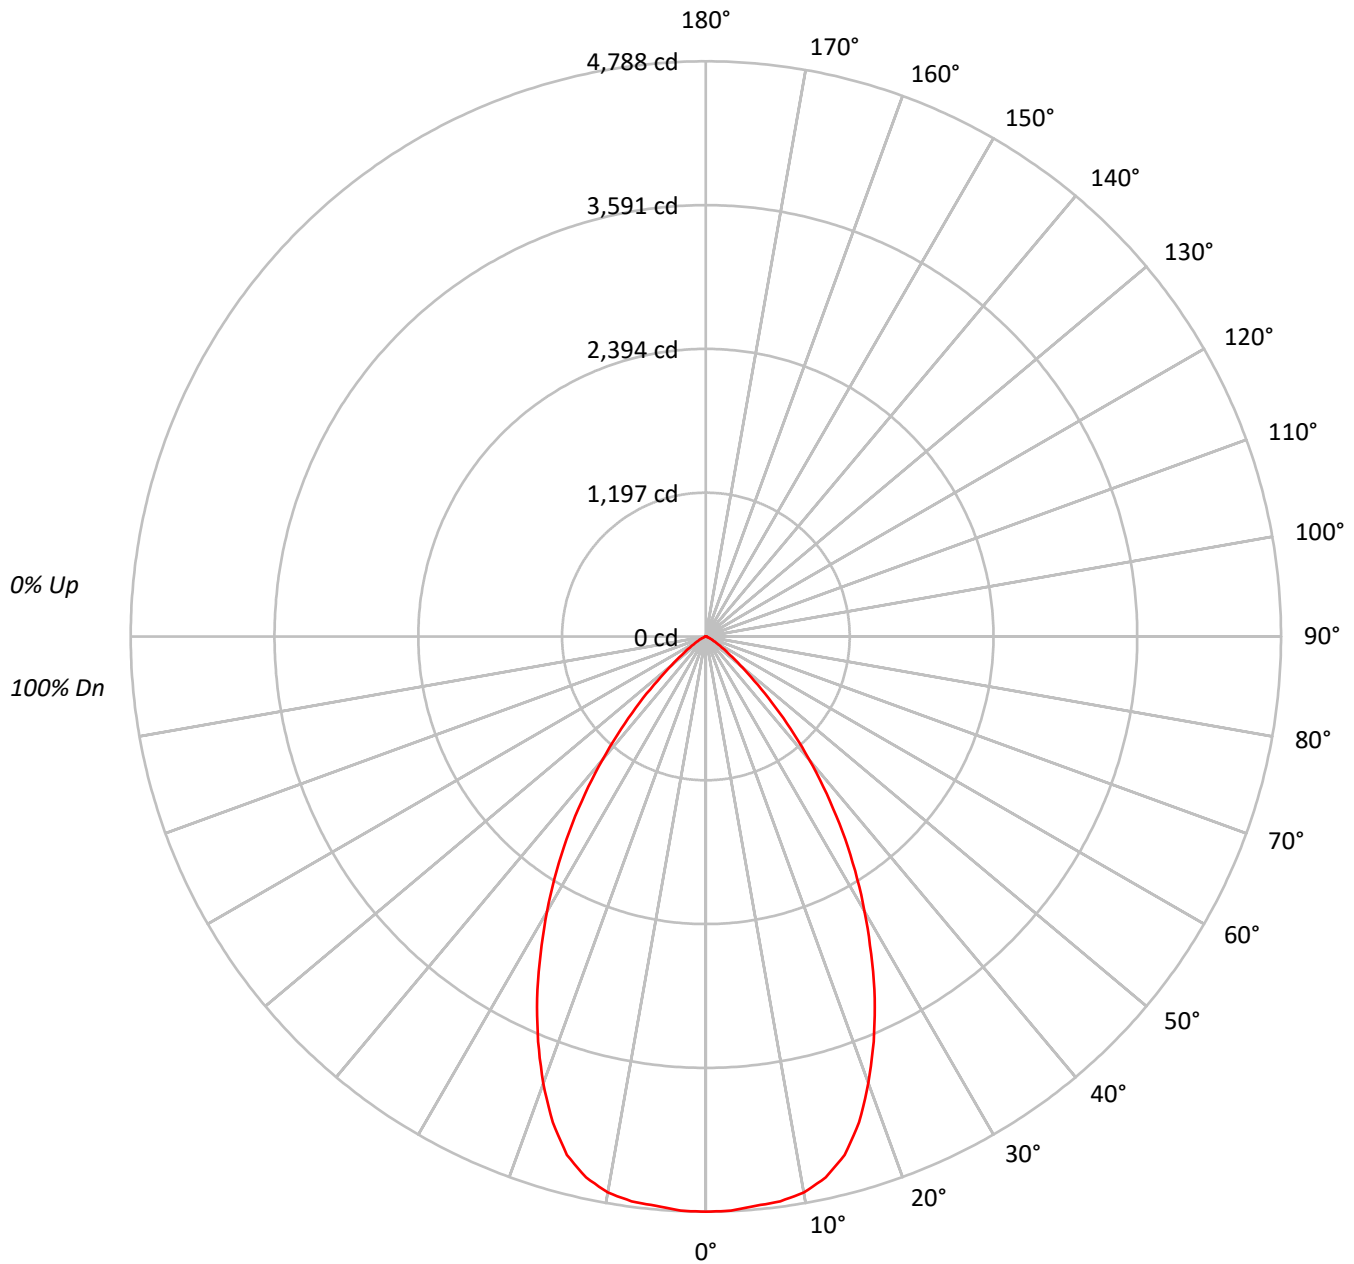



TEST NUMBER: P751227

CATALOG NUMBER: LD4D60D010-EU4DR6555659030-4LBS1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	110	107	105	111	108	105	103	104	102	100		100	99	97		97
2	107	102	97	94	105	100	96	92	97	93	90		94	91	88		91
3	101	94	88	84	99	92	87	83	90	86	82		87	84	81		85
4	95	87	81	76	93	86	80	76	84	79	75		82	77	74		80
5	90	81	74	70	88	80	74	69	78	73	69		76	72	68		75
6	85	75	69	64	83	74	68	64	73	67	63		71	67	63		70
7	80	70	64	59	79	69	63	59	68	63	59		67	62	58		66
8	76	66	59	55	75	65	59	55	64	58	54		63	58	54		62
9	72	61	55	51	71	61	55	51	60	54	51		59	54	50		58
10	68	58	52	47	67	57	51	47	57	51	47		56	51	47		55

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	279644
5°	278935
10°	278697
15°	270105
20°	245899
25°	214287
30°	178228
35°	141220
40°	101926
45°	64391
50°	33564
55°	17840
60°	9368
65°	5155
70°	2169
75°	2392
80°	1648
85°	1407

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 64391 cd/sqm



TEST NUMBER: P751227

CATALOG NUMBER: LD4D60D010-EU4DR6555659030-4LBS1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	452.8	8.6
10°-20°	1239.9	23.5
20°-30°	1515.6	28.7
30°-40°	1229.8	23.3
40°-50°	612.8	11.6
50°-60°	170.9	3.2
60°-70°	38.9	0.7
70°-80°	10.1	0.2
80°-90°	2.6	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3208.4	60.8
0°-40°	4438.1	84.2
0°-60°	5221.9	99.0
0°-90°	5273.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5273.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	4788	
5°	4758	453
15°	4467	1240
25°	3325	1516
35°	1981	1230
45°	780	613
55°	175	171
65°	37	39
75°	11	10
85°	2	3
90°	0	



TEST NUMBER: P751227

CATALOG NUMBER: LD4D60D010-EU4DR6555659030-4LBS1MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	4788.1
2.5°	4784.6
5°	4757.8
7.5°	4742.3
10°	4699.4
12.5°	4612.2
15°	4467.2
17.5°	4240.7
20°	3956.4
22.5°	3649.6
25°	3325.3
27.5°	2978.4
30°	2642.8
32.5°	2311.4
35°	1980.7
37.5°	1650.7
40°	1336.9
42.5°	1042.8
45°	779.6
47.5°	543.2
50°	369.4
52.5°	254.7
55°	175.2
57.5°	118.2
60°	80.2
62.5°	55.6
65°	37.3
67.5°	19.0
70°	12.7
72.5°	12.0
75°	10.6
77.5°	7.0
80°	4.9
82.5°	3.5
85°	2.1
87.5°	1.4
90°	0.0



Report Generated By 670245859 / DESKTOP-T8S5UU9





— 0°-180°







(END OF REPORT)