

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P750610

Luminaire Tested: LD4D60D010-EU4DR2555659035-4LBDP1H

Issue Date: 1/30/2024

Test Information

Test Method: LM-79-2019
Report Number: P750610
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-4)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/30/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D60D010-EU4DR2555659035-4LBDP1H
Description: 4 INCH ROUND DEEP 45° CUTOFF SEMI-SPECULAR CLEAR TRIM, WITH 25° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5432.6 lumens
Efficiency: N/A
Efficacy: 84.4 lumens/watt
Spacing Criteria (0/90/45): 0.42 / 0.42 / 0.45
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 64.4
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P750610

CATALOG NUMBER: LD4D60D010-EU4DR2555659035-4LBDP1H

Luminous Intensity Polar Plot

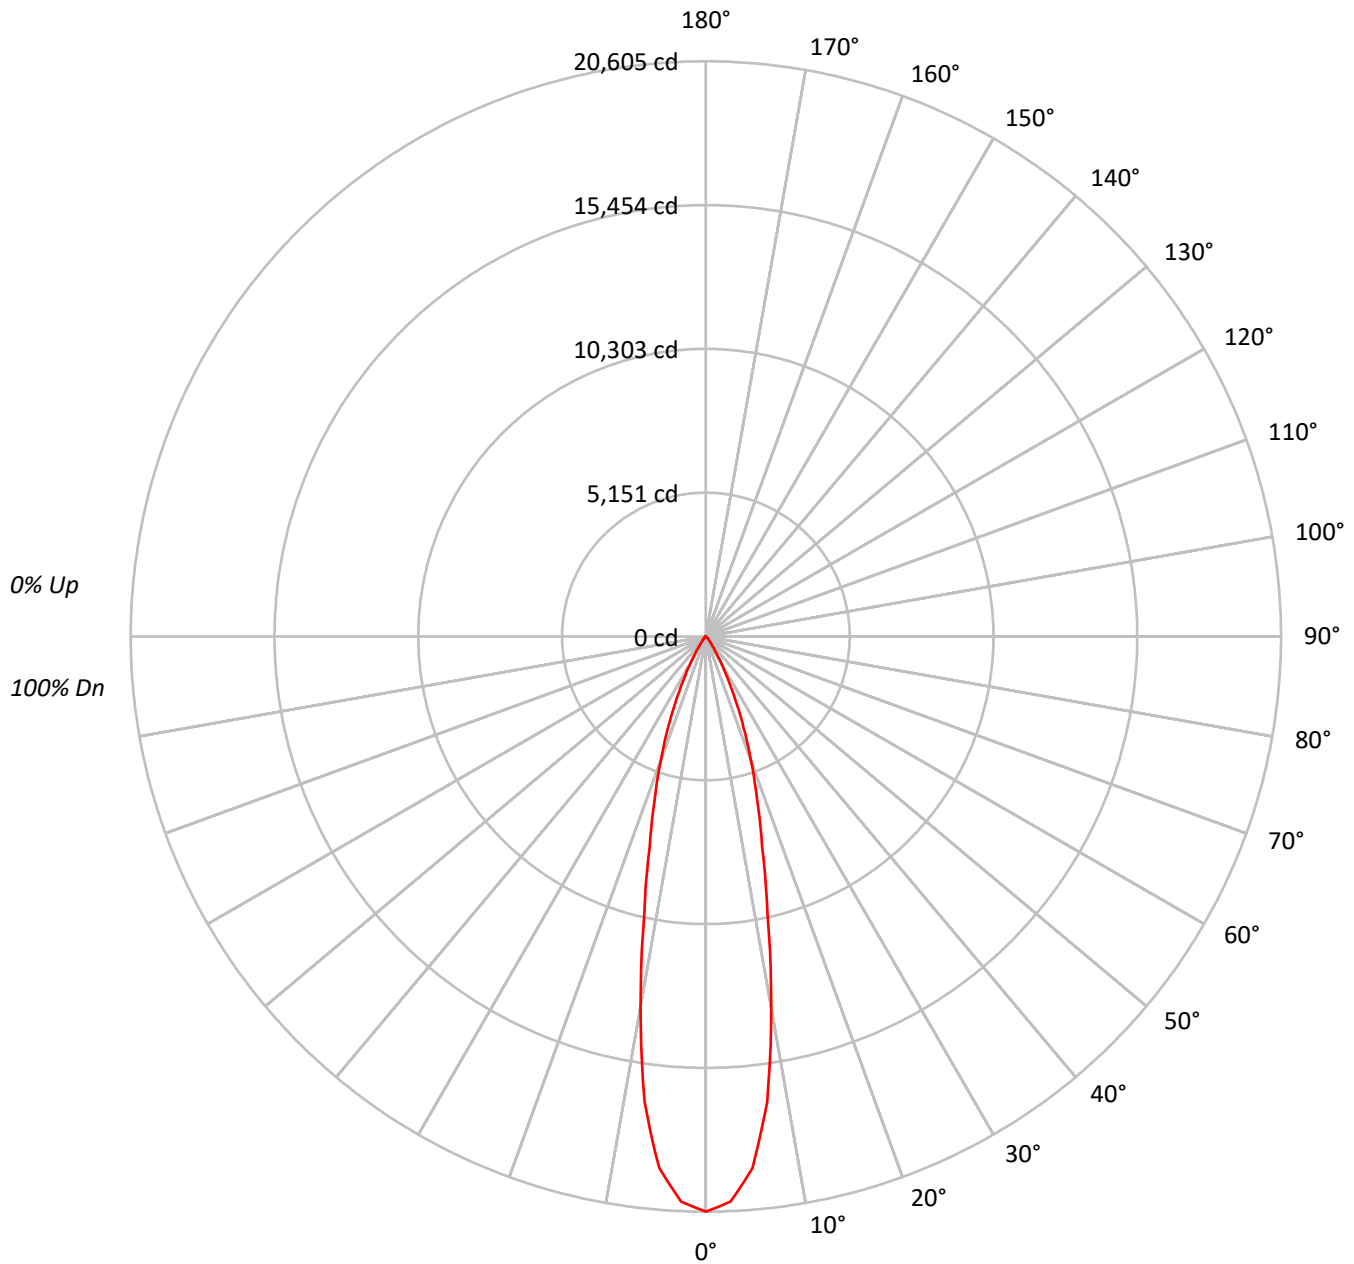



TEST NUMBER: P750610

CATALOG NUMBER: LD4D60D010-EU4DR2555659035-4LBDP1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	115	113	111	109	112	110	109	107	106	105	104		103	102	101		99
2	111	107	104	101	109	105	102	100	102	100	98		99	97	96		97
3	107	102	98	95	105	101	97	94	98	95	93		96	93	91		94
4	103	97	93	90	102	96	93	90	94	91	89		93	90	88		91
5	100	93	89	86	98	93	89	86	91	87	85		89	86	84		88
6	97	90	85	82	95	89	85	82	88	84	81		87	83	81		85
7	93	87	82	79	92	86	82	79	85	81	78		84	80	78		83
8	91	84	79	76	90	83	79	76	82	78	76		81	78	75		80
9	88	81	76	73	87	80	76	73	80	76	73		79	75	73		78
10	85	78	74	71	85	78	74	71	77	73	71		76	73	71		76

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	2251285
5°	2096793
10°	1495700
15°	880906
20°	548110
25°	300811
30°	137569
35°	52099
40°	23591
45°	14185
50°	5881
55°	3791
60°	2644
65°	1784
70°	288
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 14185 cd/sqm



TEST NUMBER: P750610

CATALOG NUMBER: LD4D60D010-EU4DR2555659035-4LBDP1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1643.0	30.2
10°-20°	2225.3	41.0
20°-30°	1177.6	21.7
30°-40°	290.7	5.4
40°-50°	70.9	1.3
50°-60°	18.6	0.3
60°-70°	6.3	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	5046.0	92.9
0°-40°	5336.6	98.2
0°-60°	5426.2	99.9
0°-90°	5432.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5432.6	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	20605	
5°	19118	###
15°	7788	2225
25°	2495	1178
35°	391	291
45°	92	71
55°	20	19
65°	7	6
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P750610

CATALOG NUMBER: LD4D60D010-EU4DR2555659035-4LBDP1H

CANDELA DISTRIBUTION (FULL):

	0°
0°	20604.7
2.5°	20266.1
5°	19117.7
7.5°	16810.4
10°	13481.3
12.5°	10191.1
15°	7787.7
17.5°	6069.4
20°	4714.0
22.5°	3535.3
25°	2495.2
27.5°	1673.2
30°	1090.4
32.5°	663.4
35°	390.6
37.5°	239.0
40°	165.4
42.5°	126.4
45°	91.8
47.5°	55.4
50°	34.6
52.5°	25.1
55°	19.9
57.5°	15.6
60°	12.1
62.5°	9.5
65°	6.9
67.5°	2.6
70°	0.9
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-T8S5UU9





— 0°-180°







(END OF REPORT)