

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P750860

Luminaire Tested: LD4D60D010-EU4DR4055659040-4LBS1B

Issue Date: 1/30/2024

Test Information

Test Method: LM-79-2019
Report Number: P750860
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-28)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/30/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D60D010-EU4DR4055659040-4LBS1B
Description: 4 INCH ROUND SHALLOW SPECULAR BLACK TRIM, WITH 40° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6567.9 lumens
Efficiency: N/A
Efficacy: 102.0 lumens/watt
Spacing Criteria (0/90/45): 0.68 / 0.68 / 0.6
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 64.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P750860

CATALOG NUMBER: LD4D60D010-EU4DR4055659040-4LBS1B

Luminous Intensity Polar Plot

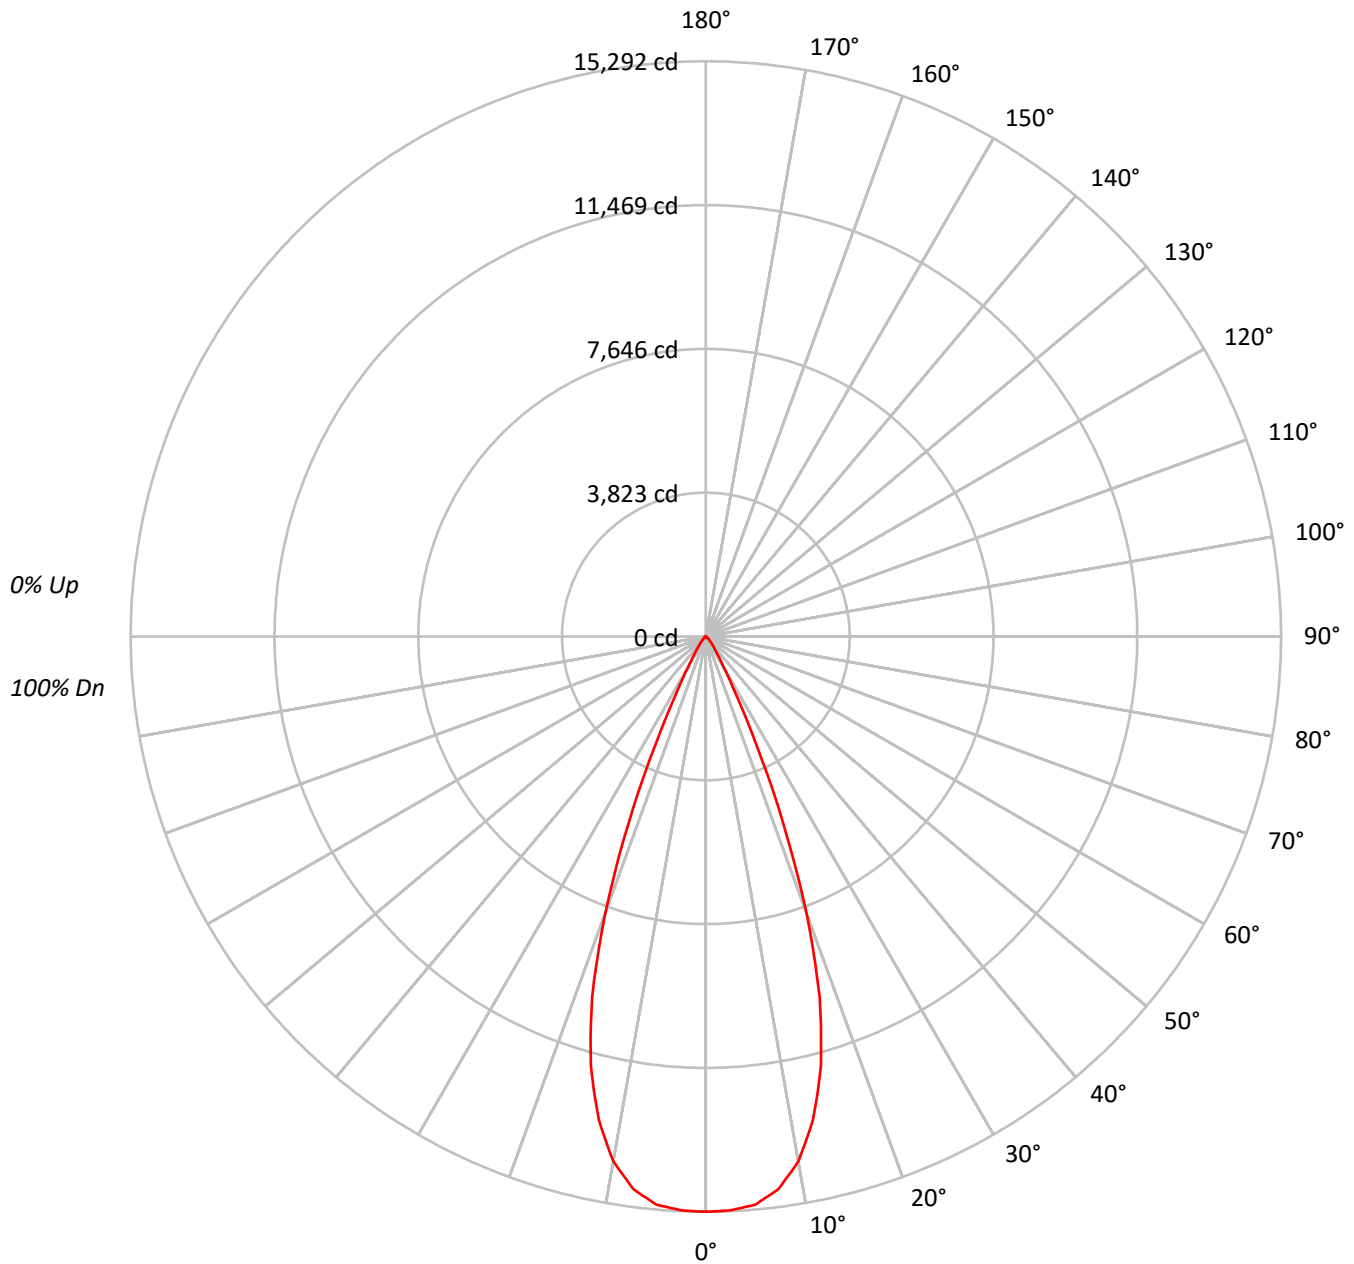



TEST NUMBER: P750860

CATALOG NUMBER: LD4D60D010-EU4DR4055659040-4LBS1B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																				
0	119	119	119	119	116	116	116	116		111	111	111		106	106	106		102	102	102
1	115	112	110	108	112	110	108	107		106	105	103		103	101	100		99	98	97
2	110	106	103	100	108	105	102	99		102	99	97		99	97	95		96	95	93
3	106	101	97	94	104	100	96	93		97	94	92		95	93	90		93	91	89
4	102	97	92	89	101	95	91	88		93	90	87		92	89	86		90	87	85
5	99	92	88	84	97	91	87	84		90	86	83		88	85	83		87	84	82
6	95	88	84	80	94	88	83	80		86	82	80		85	82	79		84	81	79
7	92	85	80	77	91	84	80	77		83	79	76		82	79	76		81	78	76
8	89	82	77	74	88	81	77	74		80	76	73		79	76	73		78	75	73
9	86	79	74	71	85	78	74	71		77	73	71		76	73	70		76	72	70
10	83	76	71	68	82	75	71	68		75	71	68		74	70	68		73	70	68

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1670794
5°	1662665
10°	1571587
15°	1336047
20°	910614
25°	379944
30°	119464
35°	55527
40°	30708
45°	14077
50°	6833
55°	3753
60°	1945
65°	698
70°	288
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 14077 cd/sqm



TEST NUMBER: P750860

CATALOG NUMBER: LD4D60D010-EU4DR4055659040-4LBS1B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1415.5	21.6
10°-20°	3171.1	48.3
20°-30°	1587.4	24.2
30°-40°	291.0	4.4
40°-50°	80.3	1.2
50°-60°	18.9	0.3
60°-70°	3.6	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	6174.0	94.0
0°-40°	6465.0	98.4
0°-60°	6564.2	99.9
0°-90°	6567.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6567.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	15292	
5°	15160	###
15°	11811	3171
25°	3152	1587
35°	416	291
45°	91	80
55°	20	19
65°	3	4
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P750860

CATALOG NUMBER: LD4D60D010-EU4DR4055659040-4LBS1B

CANDELA DISTRIBUTION (FULL):

	0°
0°	15291.8
2.5°	15269.4
5°	15159.5
7.5°	14809.4
10°	14165.3
12.5°	13161.2
15°	11811.4
17.5°	10056.0
20°	7831.7
22.5°	5339.3
25°	3151.6
27.5°	1666.0
30°	946.9
32.5°	611.9
35°	416.3
37.5°	297.5
40°	215.3
42.5°	147.4
45°	91.1
47.5°	58.1
50°	40.2
52.5°	28.6
55°	19.7
57.5°	12.5
60°	8.9
62.5°	5.4
65°	2.7
67.5°	1.8
70°	0.9
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report





— 0°-180°







(END OF REPORT)