

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P750939

Luminaire Tested: LD4D60D010-EU4DR4555659040-4LBS1H

Issue Date: 1/30/2024

Test Information

Test Method: LM-79-2019
Report Number: P750939
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-36)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/30/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D60D010-EU4DR4555659040-4LBS1H
Description: 4 INCH ROUND SHALLOW SEMI-SPECULAR CLEAR TRIM, WITH 45° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6861.5 lumens
Efficiency: N/A
Efficacy: 106.5 lumens/watt
Spacing Criteria (0/90/45): 0.75 / 0.75 / 0.69
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 64.4
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P750939

CATALOG NUMBER: LD4D60D010-EU4DR4555659040-4LBS1H

Luminous Intensity Polar Plot

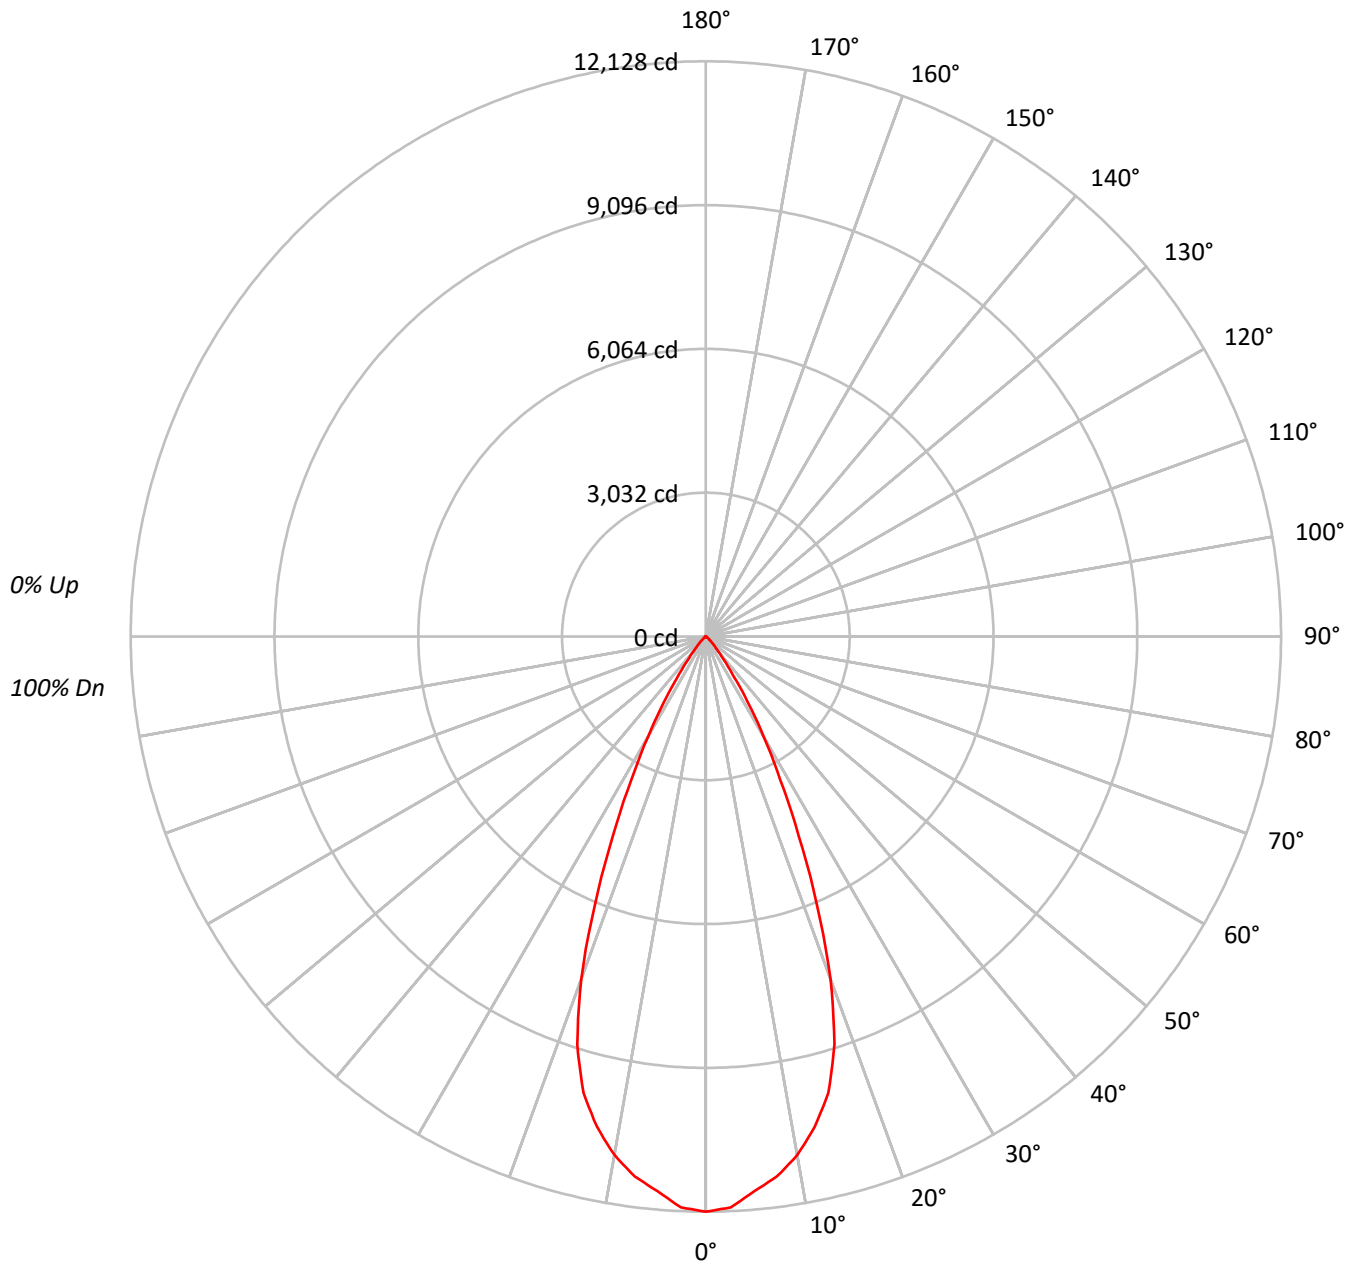

TEST NUMBER: P750939

CATALOG NUMBER: LD4D60D010-EU4DR4555659040-4LBS1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	112	110	108	112	110	108	106	106	104	103		102	101	100		98
2	109	105	102	99	107	103	100	98	100	98	95		97	95	93		95
3	105	99	95	91	103	98	94	91	95	92	89		93	90	88		91
4	100	94	89	85	99	93	88	85	91	87	84		89	86	83		87
5	96	89	84	80	95	88	83	80	86	82	79		85	81	79		83
6	92	85	80	76	91	84	79	76	83	78	75		81	77	75		80
7	89	81	75	72	87	80	75	72	79	74	71		78	74	71		77
8	85	77	72	68	84	76	71	68	75	71	68		74	70	67		73
9	82	73	68	65	81	73	68	65	72	68	65		71	67	64		71
10	79	70	65	62	78	70	65	62	69	65	62		68	64	61		68

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1325093
5°	1287369
10°	1231659
15°	1127225
20°	894278
25°	558319
30°	307725
35°	138171
40°	54428
45°	25650
50°	12154
55°	6362
60°	3125
65°	750
70°	319
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 25650 cd/sqm



TEST NUMBER: P750939

CATALOG NUMBER: LD4D60D010-EU4DR4555659040-4LBS1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1102.9	16.1
10°-20°	2714.3	39.6
20°-30°	2149.4	31.3
30°-40°	715.8	10.4
40°-50°	142.1	2.1
50°-60°	32.3	0.5
60°-70°	4.7	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	5966.6	87.0
0°-40°	6682.4	97.4
0°-60°	6856.7	99.9
0°-90°	6861.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6861.5	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	12128	
5°	11738	###
15°	9965	2714
25°	4631	2149
35°	1036	716
45°	166	142
55°	33	32
65°	3	5
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P750939

CATALOG NUMBER: LD4D60D010-EU4DR4555659040-4LBS1H

CANDELA DISTRIBUTION (FULL):

0°	
0°	12127.8
2.5°	12048.6
5°	11737.7
7.5°	11481.1
10°	11101.4
12.5°	10595.9
15°	9965.3
17.5°	9017.2
20°	7691.2
22.5°	6111.6
25°	4631.2
27.5°	3391.1
30°	2439.1
32.5°	1658.8
35°	1035.9
37.5°	614.3
40°	381.6
42.5°	250.9
45°	166.0
47.5°	106.8
50°	71.5
52.5°	47.7
55°	33.4
57.5°	21.9
60°	14.3
62.5°	7.6
65°	2.9
67.5°	1.0
70°	1.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-T8S5UU9





— 0°-180°







(END OF REPORT)