

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P751252

Luminaire Tested: LD4D60D010-EU4DR6555659040-4LBS1LI

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P751252
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-147)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D60D010-EU4DR6555659040-4LBS1LI
Description: 4 INCH ROUND SHALLOW SPECULAR CLEAR TRIM, WITH 65° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6163.8 lumens
Efficiency: N/A
Efficacy: 95.7 lumens/watt
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.96
Luminous Opening: Circular (Dia: 0.48' x H: 0')
CIE Type: Direct

Input Watts (W): 64.4
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P751252

CATALOG NUMBER: LD4D60D010-EU4DR6555659040-4LBS1LI

Luminous Intensity Polar Plot

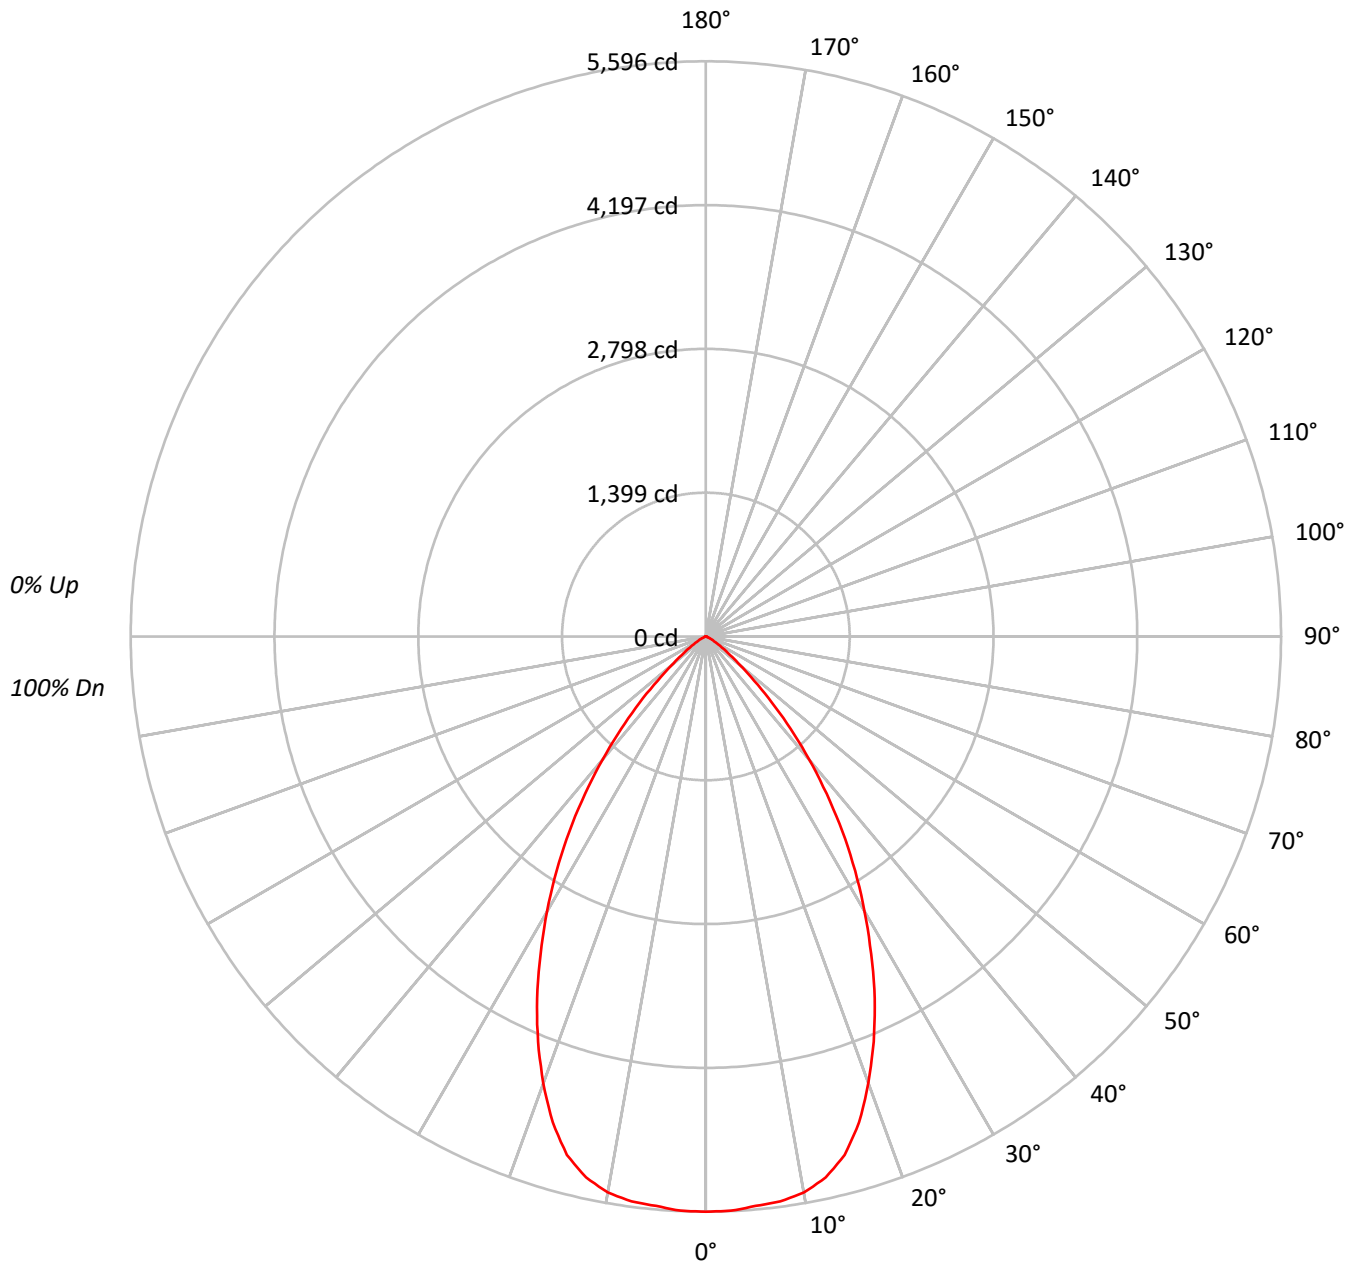



TEST NUMBER: P751252

CATALOG NUMBER: LD4D60D010-EU4DR6555659040-4LBS1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	102	102	100
1	113	110	107	105	111	108	105	103	104	102	100	100	99	97	97	95	94	94	94	93
2	107	102	97	94	105	100	96	92	97	93	90	94	91	88	91	89	87	87	87	85
3	101	94	88	84	99	92	87	83	90	86	82	87	84	81	85	82	80	80	80	78
4	95	87	81	76	93	86	80	76	84	79	75	82	77	74	80	76	73	73	73	72
5	90	81	74	70	88	80	74	69	78	73	69	76	72	68	75	71	68	68	68	66
6	85	75	69	64	83	74	68	64	73	67	63	71	67	63	70	66	62	62	62	61
7	80	70	64	59	79	69	63	59	68	63	59	67	62	58	66	61	58	58	58	56
8	76	66	59	55	75	65	59	55	64	58	54	63	58	54	62	57	54	54	54	52
9	72	61	55	51	71	61	55	51	60	54	51	59	54	50	58	54	50	50	50	49
10	68	58	52	47	67	57	51	47	57	51	47	56	51	47	55	50	47	47	47	46

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	326857
5°	326036
10°	325756
15°	315713
20°	287416
25°	250465
30°	208319
35°	165062
40°	119134
45°	75261
50°	39233
55°	20854
60°	10957
65°	6025
70°	2527
75°	2776
80°	1951
85°	1675

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 75261 cd/sqm



TEST NUMBER: P751252

CATALOG NUMBER: LD4D60D010-EU4DR6555659040-4LBS1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	529.3	8.6
10°-20°	1449.3	23.5
20°-30°	1771.5	28.7
30°-40°	1437.4	23.3
40°-50°	716.3	11.6
50°-60°	199.8	3.2
60°-70°	45.4	0.7
70°-80°	11.8	0.2
80°-90°	3.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3750.1	60.8
0°-40°	5187.5	84.2
0°-60°	6103.5	99.0
0°-90°	6163.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6163.8	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	5596	
5°	5561	529
15°	5222	1449
25°	3887	1772
35°	2315	1437
45°	911	716
55°	205	200
65°	44	45
75°	12	12
85°	2	3
90°	0	



TEST NUMBER: P751252

CATALOG NUMBER: LD4D60D010-EU4DR6555659040-4LBS1LI

CANDELA DISTRIBUTION (FULL):

0°	
0°	5596.5
2.5°	5592.4
5°	5561.2
7.5°	5543.1
10°	5492.9
12.5°	5390.9
15°	5221.5
17.5°	4956.7
20°	4624.4
22.5°	4265.9
25°	3886.7
27.5°	3481.3
30°	3089.0
32.5°	2701.6
35°	2315.1
37.5°	1929.4
40°	1562.6
42.5°	1218.8
45°	911.2
47.5°	634.9
50°	431.8
52.5°	297.7
55°	204.8
57.5°	138.2
60°	93.8
62.5°	65.0
65°	43.6
67.5°	22.2
70°	14.8
72.5°	14.0
75°	12.3
77.5°	8.2
80°	5.8
82.5°	4.1
85°	2.5
87.5°	1.6
90°	0.0



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report





— 0°-180°







(END OF REPORT)