

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P752380

Luminaire Tested: LD4D70BD010-EU4DR4070959027-4LBDP1MW

Issue Date: 1/30/2024

Test Information

Test Method: LM-79-2019
Report Number: P752380
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-28)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/30/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D70BD010-EU4DR4070959027-4LBDP1MW
Description: 4 INCH ROUND DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 40° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6521.0 lumens
Efficiency: N/A
Efficacy: 97.9 lumens/watt
Spacing Criteria (0/90/45): 0.68 / 0.68 / 0.6
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 66.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P752380

CATALOG NUMBER: LD4D70BD010-EU4DR4070959027-4LBDP1MW

Luminous Intensity Polar Plot

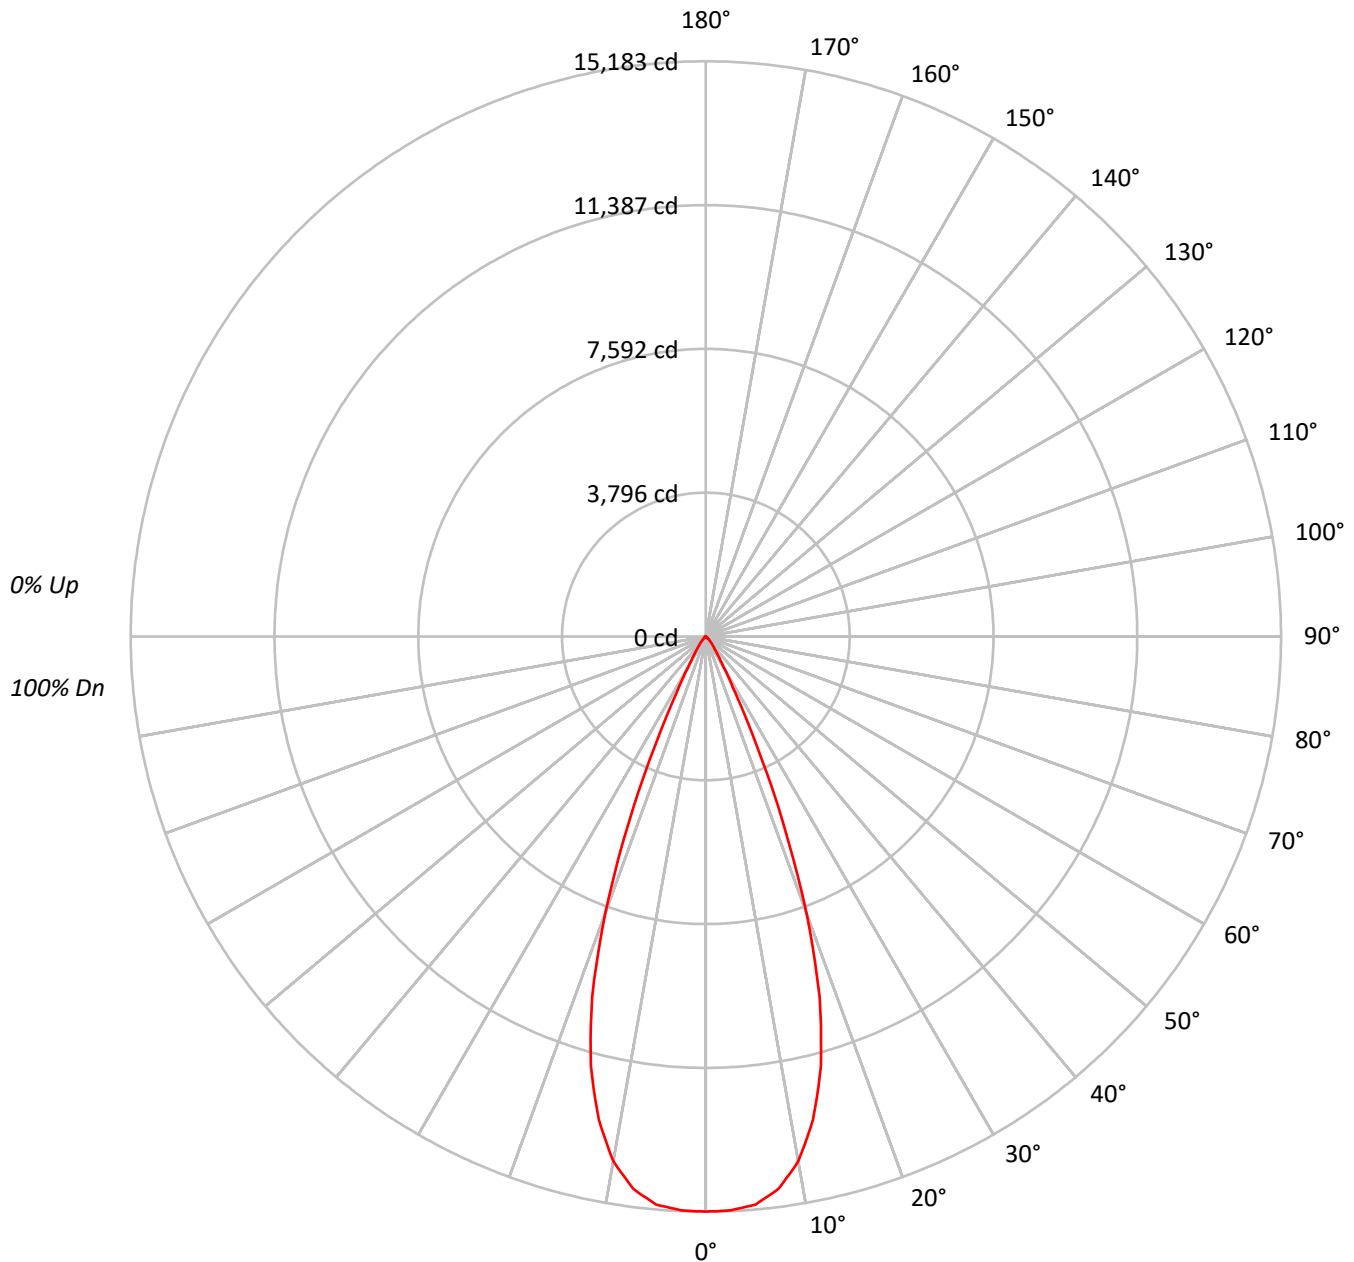



TEST NUMBER: P752380

CATALOG NUMBER: LD4D70BD010-EU4DR4070959027-4LBDP1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	115	112	110	108	112	110	108	107	106	105	103		103	101	100		99
2	110	106	103	100	108	105	102	99	102	99	97		99	97	95		96
3	106	101	97	94	104	100	96	93	97	94	92		95	93	90		93
4	102	97	92	89	101	95	91	88	93	90	87		92	89	86		90
5	99	92	88	84	97	91	87	84	90	86	83		88	85	83		87
6	95	88	84	80	94	88	83	80	86	82	80		85	82	79		84
7	92	85	80	77	91	84	80	77	83	79	76		82	79	76		81
8	89	82	77	74	88	81	77	74	80	76	73		79	76	73		78
9	86	79	74	71	85	78	74	71	77	73	71		76	73	70		76
10	83	76	71	68	82	75	71	68	75	71	68		74	70	68		73

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1658862
5°	1650798
10°	1560371
15°	1326512
20°	904115
25°	377231
30°	118619
35°	55127
40°	30494
45°	13984
50°	6782
55°	3715
60°	1945
65°	698
70°	288
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 13984 cd/sqm



TEST NUMBER: P752380

CATALOG NUMBER: LD4D70BD010-EU4DR4070959027-4LBDP1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1405.4	21.6
10°-20°	3148.5	48.3
20°-30°	1576.0	24.2
30°-40°	288.9	4.4
40°-50°	79.7	1.2
50°-60°	18.7	0.3
60°-70°	3.6	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	6130.0	94.0
0°-40°	6418.9	98.4
0°-60°	6517.3	99.9
0°-90°	6521.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6521.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	15183	
5°	15051	###
15°	11727	3149
25°	3129	1576
35°	413	289
45°	90	80
55°	20	19
65°	3	4
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P752380

CATALOG NUMBER: LD4D70BD010-EU4DR4070959027-4LBDP1MW

CANDELA DISTRIBUTION (FULL):

0°	
0°	15182.6
2.5°	15160.4
5°	15051.3
7.5°	14703.6
10°	14064.2
12.5°	13067.2
15°	11727.1
17.5°	9984.3
20°	7775.8
22.5°	5301.2
25°	3129.1
27.5°	1654.1
30°	940.2
32.5°	607.6
35°	413.3
37.5°	295.4
40°	213.8
42.5°	146.3
45°	90.5
47.5°	57.7
50°	39.9
52.5°	28.4
55°	19.5
57.5°	12.4
60°	8.9
62.5°	5.3
65°	2.7
67.5°	1.8
70°	0.9
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report





— 0°-180°







(END OF REPORT)