

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P752695

Luminaire Tested: LD4D70BD010-EU4DR6070959027-4LBS1LI

Issue Date: 1/30/2024

Test Information

Test Method: LM-79-2019
Report Number: P752695
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-60)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/30/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D70BD010-EU4DR6070959027-4LBS1LI
Description: 4 INCH ROUND SHALLOW SPECULAR CLEAR TRIM, WITH 60° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7297.7 lumens
Efficiency: N/A
Efficacy: 109.6 lumens/watt
Spacing Criteria (0/90/45): 0.98 / 0.98 / 0.92
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 66.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P752695

CATALOG NUMBER: LD4D70BD010-EU4DR6070959027-4LBS1LI

Luminous Intensity Polar Plot

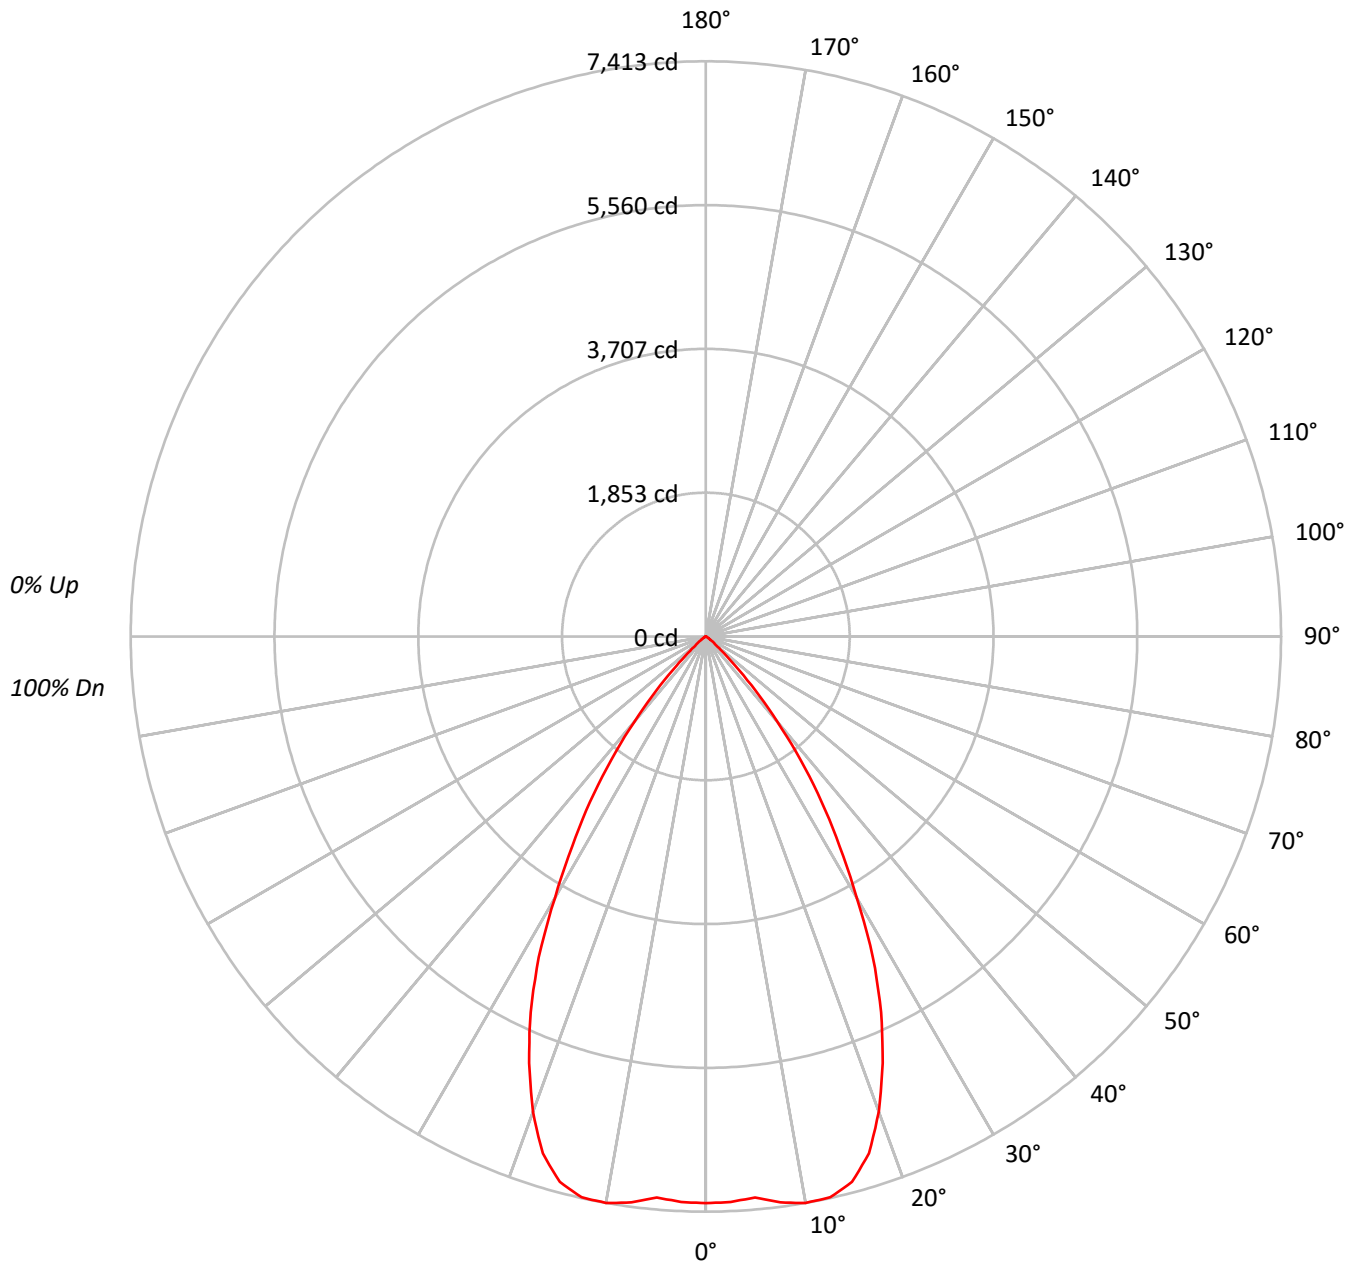



TEST NUMBER: P752695

CATALOG NUMBER: LD4D70BD010-EU4DR6070959027-4LBS1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	114	111	108	106	111	109	106	104	105	103	101	101	99	98	97	96	95	94		
2	108	103	99	96	106	101	98	95	98	95	92	95	93	90	92	90	89	87		
3	102	96	91	87	100	95	90	86	92	88	85	90	86	84	87	85	82	81		
4	97	90	84	80	95	88	83	79	86	82	78	84	81	78	82	79	77	75		
5	92	84	78	74	91	83	77	73	81	76	73	79	75	72	78	74	71	70		
6	87	79	73	68	86	78	72	68	76	71	68	75	70	67	74	70	67	65		
7	83	74	68	63	82	73	67	63	72	67	63	71	66	63	69	65	62	61		
8	79	69	63	59	78	69	63	59	68	63	59	67	62	59	66	61	58	57		
9	75	65	59	55	74	65	59	55	64	59	55	63	58	55	62	58	55	53		
10	72	62	56	52	71	61	56	52	61	55	52	60	55	52	59	55	52	50		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	797931
5°	795989
10°	822423
15°	823274
20°	757494
25°	644299
30°	490940
35°	347169
40°	203861
45°	82265
50°	27469
55°	13220
60°	5441
65°	801
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 82265 cd/sqm



TEST NUMBER: P752695

CATALOG NUMBER: LD4D70BD010-EU4DR6070959027-4LBS1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	700.1	9.6
10°-20°	2016.3	27.6
20°-30°	2413.3	33.1
30°-40°	1614.1	22.1
40°-50°	478.6	6.6
50°-60°	68.8	0.9
60°-70°	6.5	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	5129.7	70.3
0°-40°	6743.8	92.4
0°-60°	7291.1	99.9
0°-90°	7297.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	7297.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	7303	
5°	7258	700
15°	7278	2016
25°	5344	2413
35°	2603	1614
45°	532	479
55°	69	69
65°	3	7
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P752695

CATALOG NUMBER: LD4D70BD010-EU4DR6070959027-4LBS1LI

CANDELA DISTRIBUTION (FULL):

0°	
0°	7303.0
2.5°	7293.7
5°	7257.5
7.5°	7355.9
10°	7412.8
12.5°	7402.5
15°	7278.2
17.5°	6985.1
20°	6514.8
22.5°	5950.4
25°	5344.4
27.5°	4661.9
30°	3891.3
32.5°	3203.6
35°	2602.8
37.5°	2001.1
40°	1429.3
42.5°	942.5
45°	532.4
47.5°	272.4
50°	161.6
52.5°	104.6
55°	69.4
57.5°	44.5
60°	24.9
62.5°	10.4
65°	3.1
67.5°	1.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report





— 0°-180°







(END OF REPORT)