

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P752548

Luminaire Tested: LD4D70BD010-EU4DR5070959030-4LBDP1LI

Issue Date: 1/30/2024

Test Information

Test Method: LM-79-2019
Report Number: P752548
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-44)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/30/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D70BD010-EU4DR5070959030-4LBDP1LI
Description: 4 INCH ROUND DEEP 45° CUTOFF SPECULAR CLEAR TRIM, WITH 50° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7388.2 lumens
Efficiency: N/A
Efficacy: 110.9 lumens/watt
Spacing Criteria (0/90/45): 0.8 / 0.8 / 0.73
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 66.6
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P752548

CATALOG NUMBER: LD4D70BD010-EU4DR5070959030-4LBDP1LI

Luminous Intensity Polar Plot

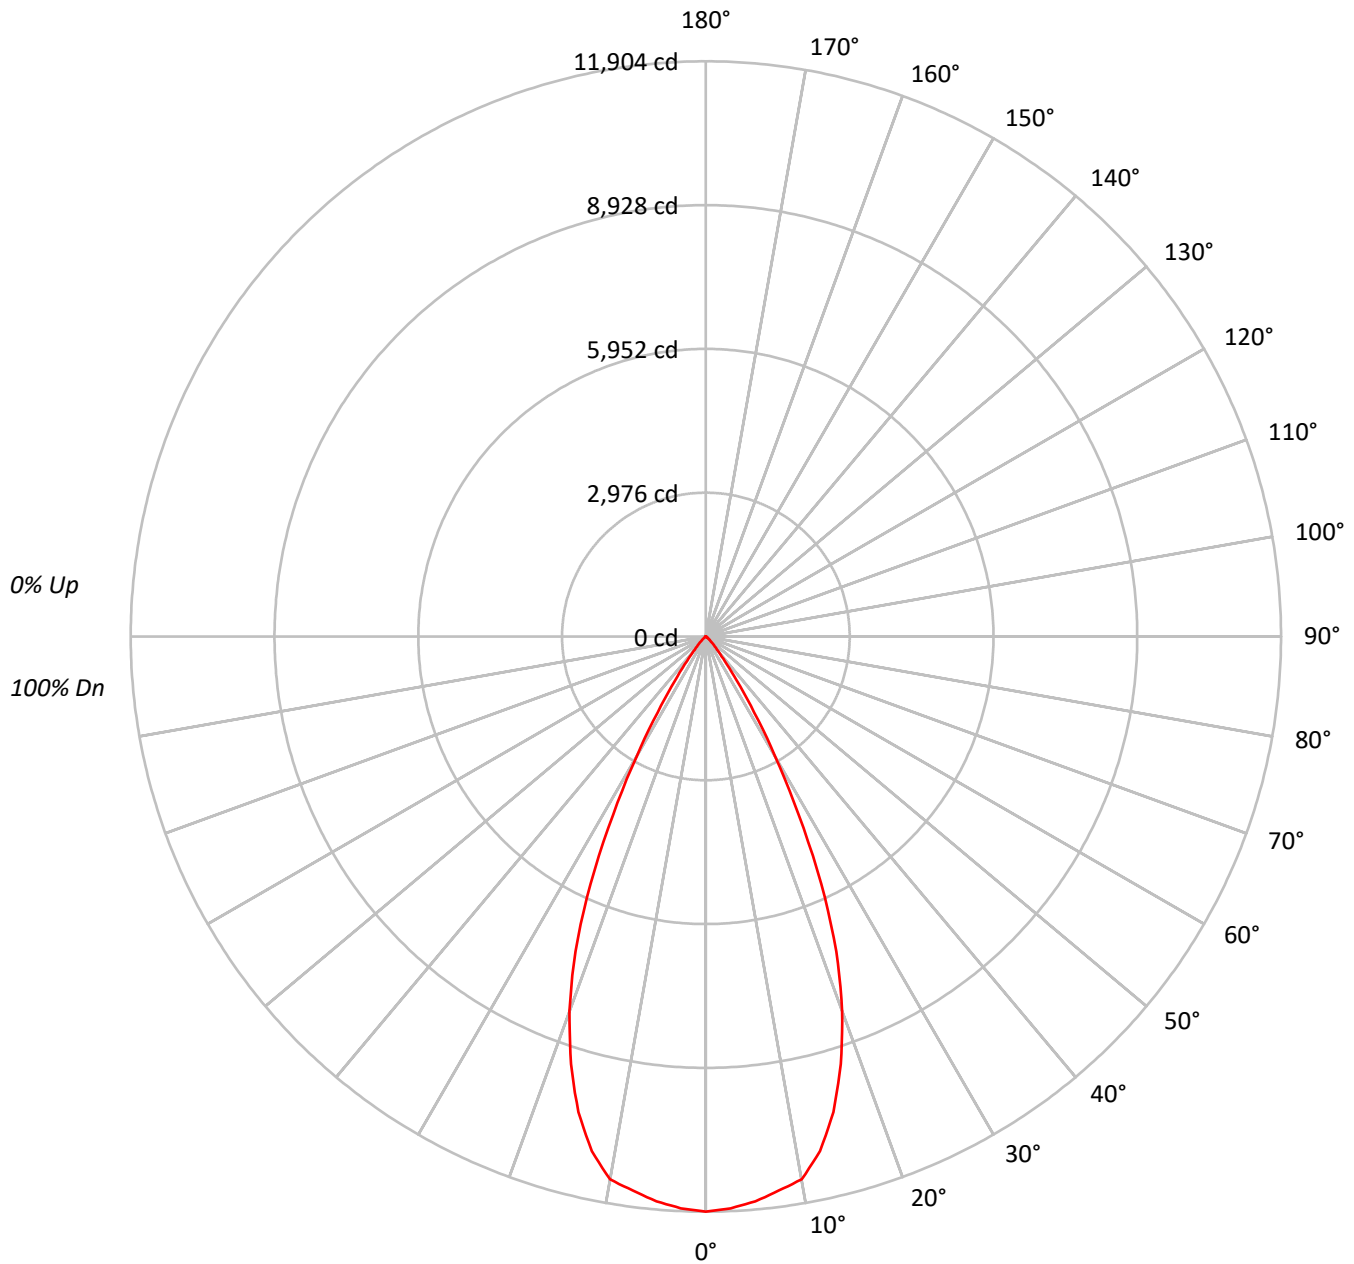



TEST NUMBER: P752548

CATALOG NUMBER: LD4D70BD010-EU4DR5070959030-4LBDP1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	112	109	107	112	110	108	106	106	104	102		102	101	99		98
2	109	105	101	98	107	103	100	97	100	98	95		97	95	93		95
3	105	99	95	91	103	98	94	90	95	92	89		93	90	88		91
4	100	94	89	85	99	93	88	85	90	87	84		89	85	83		87
5	96	89	84	80	95	88	83	79	86	82	79		85	81	78		83
6	92	84	79	75	91	83	79	75	82	78	74		81	77	74		79
7	88	80	75	71	87	79	74	71	78	74	71		77	73	70		76
8	85	76	71	67	84	76	71	67	75	70	67		74	70	67		73
9	81	73	68	64	80	72	67	64	71	67	64		71	67	64		70
10	78	70	64	61	77	69	64	61	68	64	61		68	64	61		67

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1300662
5°	1287029
10°	1265830
15°	1152642
20°	959123
25°	680839
30°	360373
35°	146854
40°	54542
45°	24970
50°	10233
55°	5353
60°	2622
65°	776
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 24970 cd/sqm



TEST NUMBER: P752548

CATALOG NUMBER: LD4D70BD010-EU4DR5070959030-4LBDP1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1109.1	15.0
10°-20°	2803.1	37.9
20°-30°	2517.9	34.1
30°-40°	788.3	10.7
40°-50°	138.0	1.9
50°-60°	27.5	0.4
60°-70°	4.1	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	6430.1	87.0
0°-40°	7218.5	97.7
0°-60°	7384.0	99.9
0°-90°	7388.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	7388.2	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	11904	
5°	11735	###
15°	10190	2803
25°	5648	2518
35°	1101	788
45°	162	138
55°	28	28
65°	3	4
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P752548

CATALOG NUMBER: LD4D70BD010-EU4DR5070959030-4LBDP1LI

CANDELA DISTRIBUTION (FULL):

	0°
0°	11904.2
2.5°	11845.0
5°	11734.6
7.5°	11566.0
10°	11409.4
12.5°	10907.6
15°	10190.0
17.5°	9278.7
20°	8248.9
22.5°	7057.6
25°	5647.5
27.5°	4152.1
30°	2856.4
32.5°	1859.7
35°	1101.0
37.5°	632.3
40°	382.4
42.5°	248.9
45°	161.6
47.5°	98.4
50°	60.2
52.5°	41.1
55°	28.1
57.5°	19.1
60°	12.0
62.5°	7.0
65°	3.0
67.5°	1.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-T8S5UU9





— 0°-180°







(END OF REPORT)