

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P752550

Luminaire Tested: LD4D70BD010-EU4DR5070959030-4LBS1B

Issue Date: 1/30/2024

Test Information

Test Method: LM-79-2019
Report Number: P752550
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-44)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/30/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D70BD010-EU4DR5070959030-4LBS1B
Description: 4 INCH ROUND SHALLOW SPECULAR BLACK TRIM, WITH 50° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7008.5 lumens
Efficiency: N/A
Efficacy: 105.2 lumens/watt
Spacing Criteria (0/90/45): 0.8 / 0.8 / 0.73
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 66.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P752550

CATALOG NUMBER: LD4D70BD010-EU4DR5070959030-4LBS1B

Luminous Intensity Polar Plot

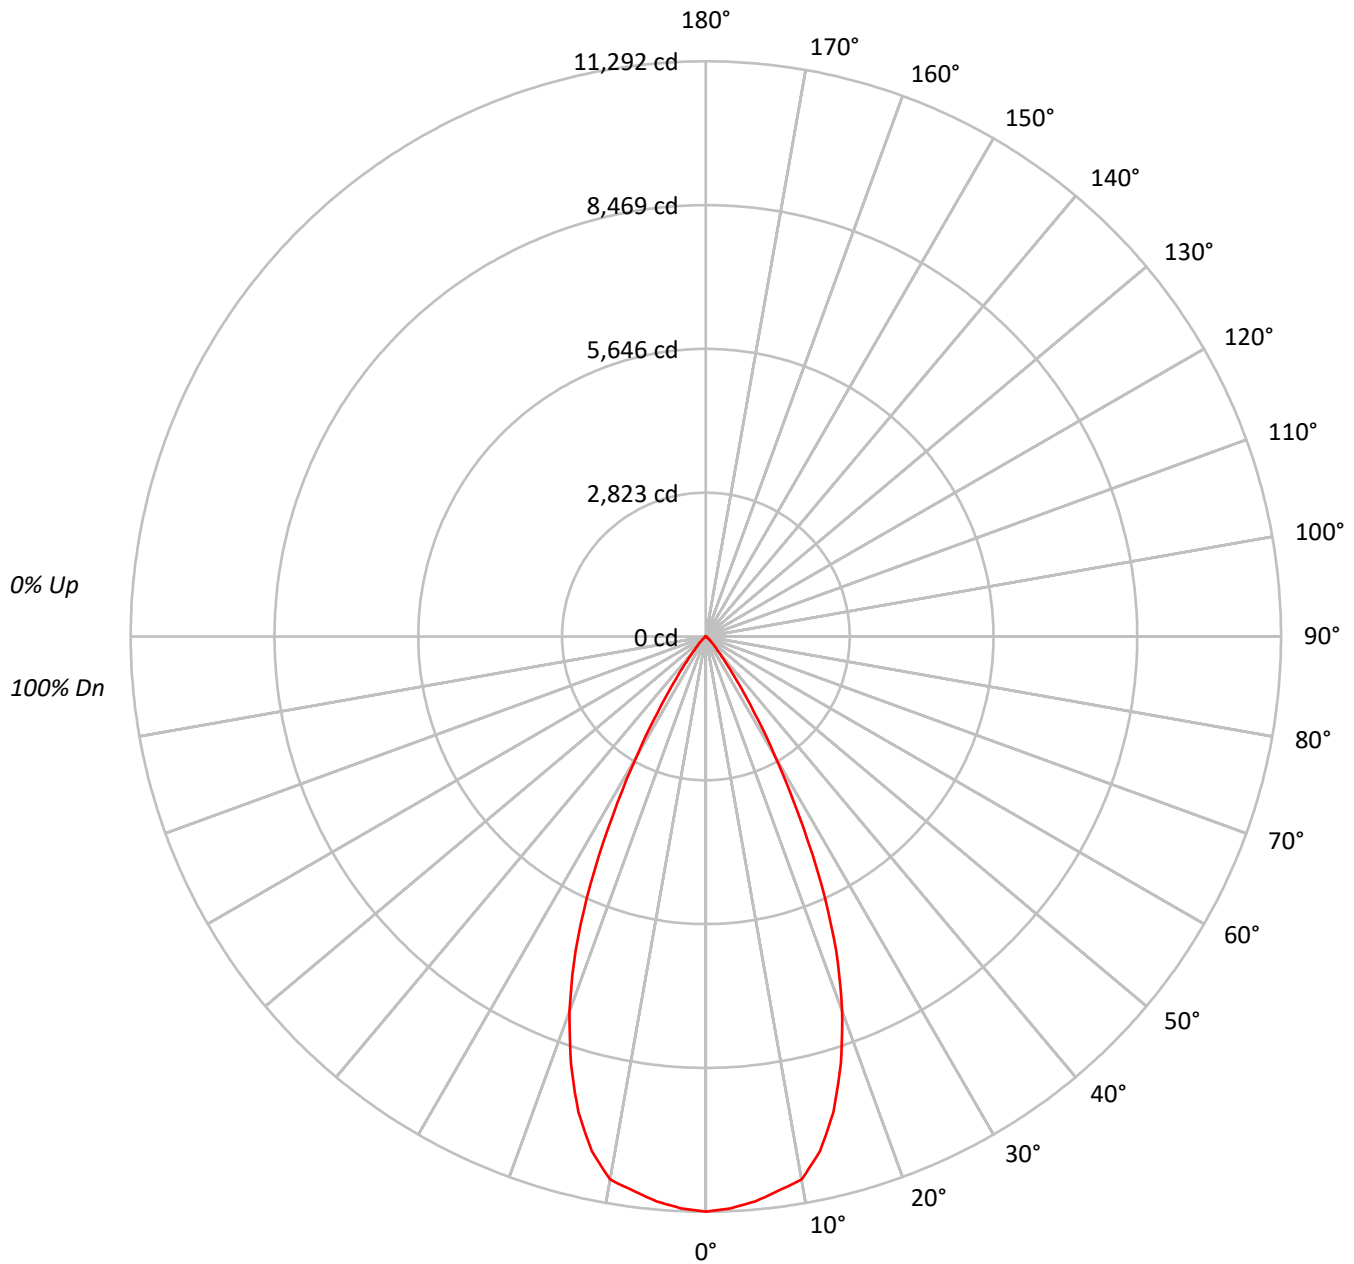



TEST NUMBER: P752550

CATALOG NUMBER: LD4D70BD010-EU4DR5070959030-4LBS1B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	112	109	107	112	110	108	106	106	104	102		102	101	99		98
2	109	105	101	98	107	103	100	97	100	98	95		97	95	93		95
3	105	99	95	91	103	98	94	90	95	92	89		93	90	88		91
4	100	94	89	85	99	93	88	85	90	87	84		89	85	83		87
5	96	89	84	80	95	88	83	79	86	82	79		85	81	78		83
6	92	84	79	75	91	83	79	75	82	78	74		81	77	74		79
7	88	80	75	71	87	79	74	71	78	74	71		77	73	70		76
8	85	76	71	67	84	76	71	67	75	70	67		74	70	67		73
9	81	73	68	64	80	72	67	64	71	67	64		71	67	64		70
10	78	70	64	61	77	69	64	61	68	64	61		68	64	61		67

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1233816
5°	1220882
10°	1200772
15°	1093404
20°	909835
25°	645842
30°	341852
35°	139305
40°	51732
45°	23688
50°	9706
55°	5086
60°	2491
65°	750
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 23688 cd/sqm



TEST NUMBER: P752550

CATALOG NUMBER: LD4D70BD010-EU4DR5070959030-4LBS1B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1052.1	15.0
10°-20°	2659.0	37.9
20°-30°	2388.5	34.1
30°-40°	747.8	10.7
40°-50°	130.9	1.9
50°-60°	26.1	0.4
60°-70°	4.0	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	6099.6	87.0
0°-40°	6847.5	97.7
0°-60°	7004.5	99.9
0°-90°	7008.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	7008.5	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	11292	
5°	11132	###
15°	9666	2659
25°	5357	2388
35°	1044	748
45°	153	131
55°	27	26
65°	3	4
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P752550

CATALOG NUMBER: LD4D70BD010-EU4DR5070959030-4LBS1B

CANDELA DISTRIBUTION (FULL):

	0°
0°	11292.4
2.5°	11236.2
5°	11131.5
7.5°	10971.5
10°	10823.0
12.5°	10347.0
15°	9666.3
17.5°	8801.8
20°	7825.0
22.5°	6694.9
25°	5357.2
27.5°	3938.7
30°	2709.6
32.5°	1764.2
35°	1044.4
37.5°	599.8
40°	362.7
42.5°	236.1
45°	153.3
47.5°	93.3
50°	57.1
52.5°	39.0
55°	26.7
57.5°	18.1
60°	11.4
62.5°	6.7
65°	2.9
67.5°	1.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report





— 0°-180°







(END OF REPORT)