

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P752328

Luminaire Tested: LD4D70BD010-EU4DR3570959035-4LBDP1MW

Issue Date: 1/30/2024

Test Information

Test Method: LM-79-2019
Report Number: P752328
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-20)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/30/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D70BD010-EU4DR3570959035-4LBDP1MW
Description: 4 INCH ROUND DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 35° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6139.4 lumens
Efficiency: N/A
Efficacy: 92.2 lumens/watt
Spacing Criteria (0/90/45): 0.6 / 0.6 / 0.54
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 66.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P752328

CATALOG NUMBER: LD4D70BD010-EU4DR3570959035-4LBDP1MW

Luminous Intensity Polar Plot

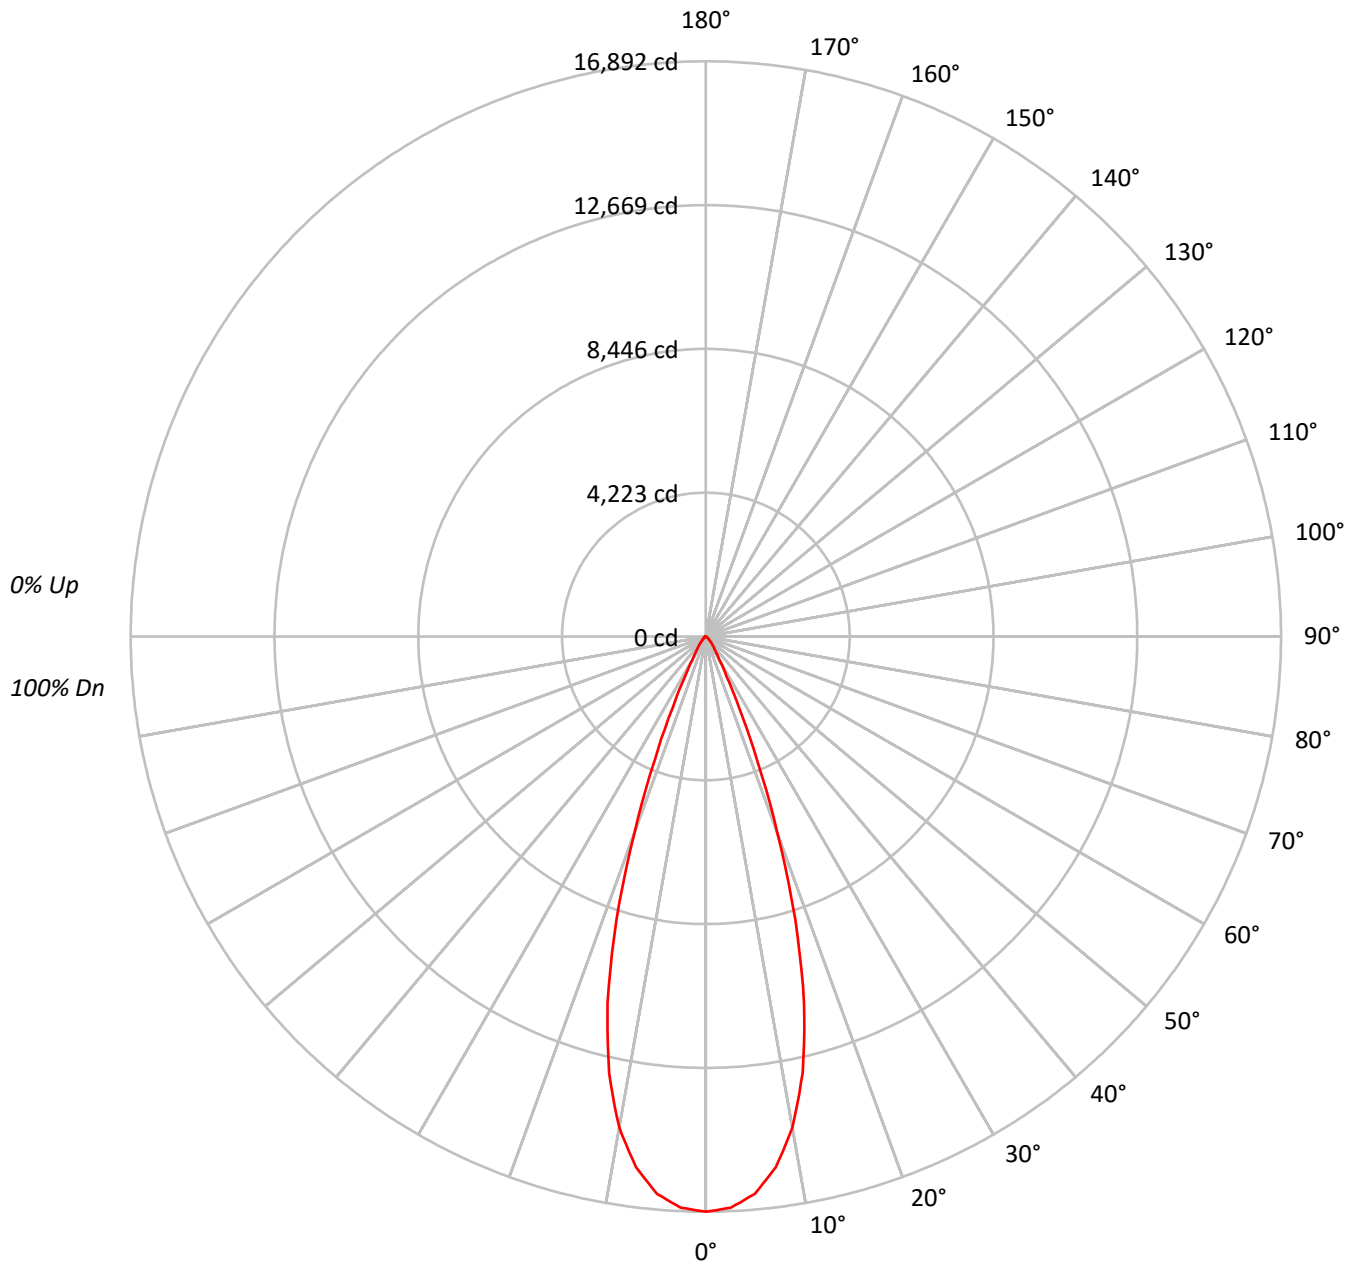



TEST NUMBER: P752328

CATALOG NUMBER: LD4D70BD010-EU4DR3570959035-4LBDP1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	115	112	110	108	112	110	108	107	106	105	103		103	101	100		99
2	110	106	103	101	108	105	102	99	102	99	97		99	97	95		96
3	106	101	97	94	105	100	96	93	97	95	92		95	93	91		93
4	103	97	92	89	101	96	92	89	94	90	88		92	89	87		90
5	99	93	88	85	98	92	87	84	90	86	84		89	85	83		87
6	96	89	84	81	94	88	84	81	87	83	80		85	82	80		84
7	93	85	81	78	91	85	80	77	84	80	77		83	79	77		82
8	90	82	78	74	88	82	77	74	81	77	74		80	76	74		79
9	87	79	75	72	86	79	75	72	78	74	71		77	74	71		77
10	84	77	72	69	83	76	72	69	76	72	69		75	71	69		74

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1845676
5°	1802318
10°	1624364
15°	1260769
20°	715090
25°	278207
30°	103795
35°	56888
40°	37184
45°	22637
50°	14414
55°	10172
60°	7452
65°	4059
70°	288
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 22637 cd/sqm

TEST NUMBER: P752328

CATALOG NUMBER: LD4D70BD010-EU4DR3570959035-4LBDP1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1511.3	24.6
10°-20°	2950.8	48.1
20°-30°	1203.4	19.6
30°-40°	288.0	4.7
40°-50°	120.0	2.0
50°-60°	49.7	0.8
60°-70°	15.6	0.3
70°-80°	0.4	0.0
80°-90°	0.2	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	5665.5	92.3
0°-40°	5953.5	97.0
0°-60°	6123.2	99.7
0°-90°	6139.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6139.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	16892	
5°	16433	###
15°	11146	2951
25°	2308	1203
35°	426	288
45°	146	120
55°	53	50
65°	16	16
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P752328

CATALOG NUMBER: LD4D70BD010-EU4DR3570959035-4LBDP1MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	16892.4
2.5°	16791.1
5°	16432.8
7.5°	15717.9
10°	14641.0
12.5°	13124.6
15°	11145.9
17.5°	8725.8
20°	6150.1
22.5°	3921.6
25°	2307.7
27.5°	1304.5
30°	822.7
32.5°	577.6
35°	426.5
37.5°	329.8
40°	260.7
42.5°	200.8
45°	146.5
47.5°	109.6
50°	84.8
52.5°	67.2
55°	53.4
57.5°	43.3
60°	34.1
62.5°	24.9
65°	15.7
67.5°	5.5
70°	0.9
72.5°	0.9
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.9
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-T8S5UU9





— 0°-180°







(END OF REPORT)