

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P752404

Luminaire Tested: LD4D70BD010-EU4DR4070959035-4LBDP1H

Issue Date: 1/30/2024

Test Information

Test Method: LM-79-2019
Report Number: P752404
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-28)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/30/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D70BD010-EU4DR4070959035-4LBDP1H
Description: 4 INCH ROUND DEEP 45° CUTOFF SEMI-SPECULAR CLEAR TRIM, WITH 40° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7155.5 lumens
Efficiency: N/A
Efficacy: 107.4 lumens/watt
Spacing Criteria (0/90/45): 0.68 / 0.68 / 0.6
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 66.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P752404

CATALOG NUMBER: LD4D70BD010-EU4DR4070959035-4LBDP1H

Luminous Intensity Polar Plot

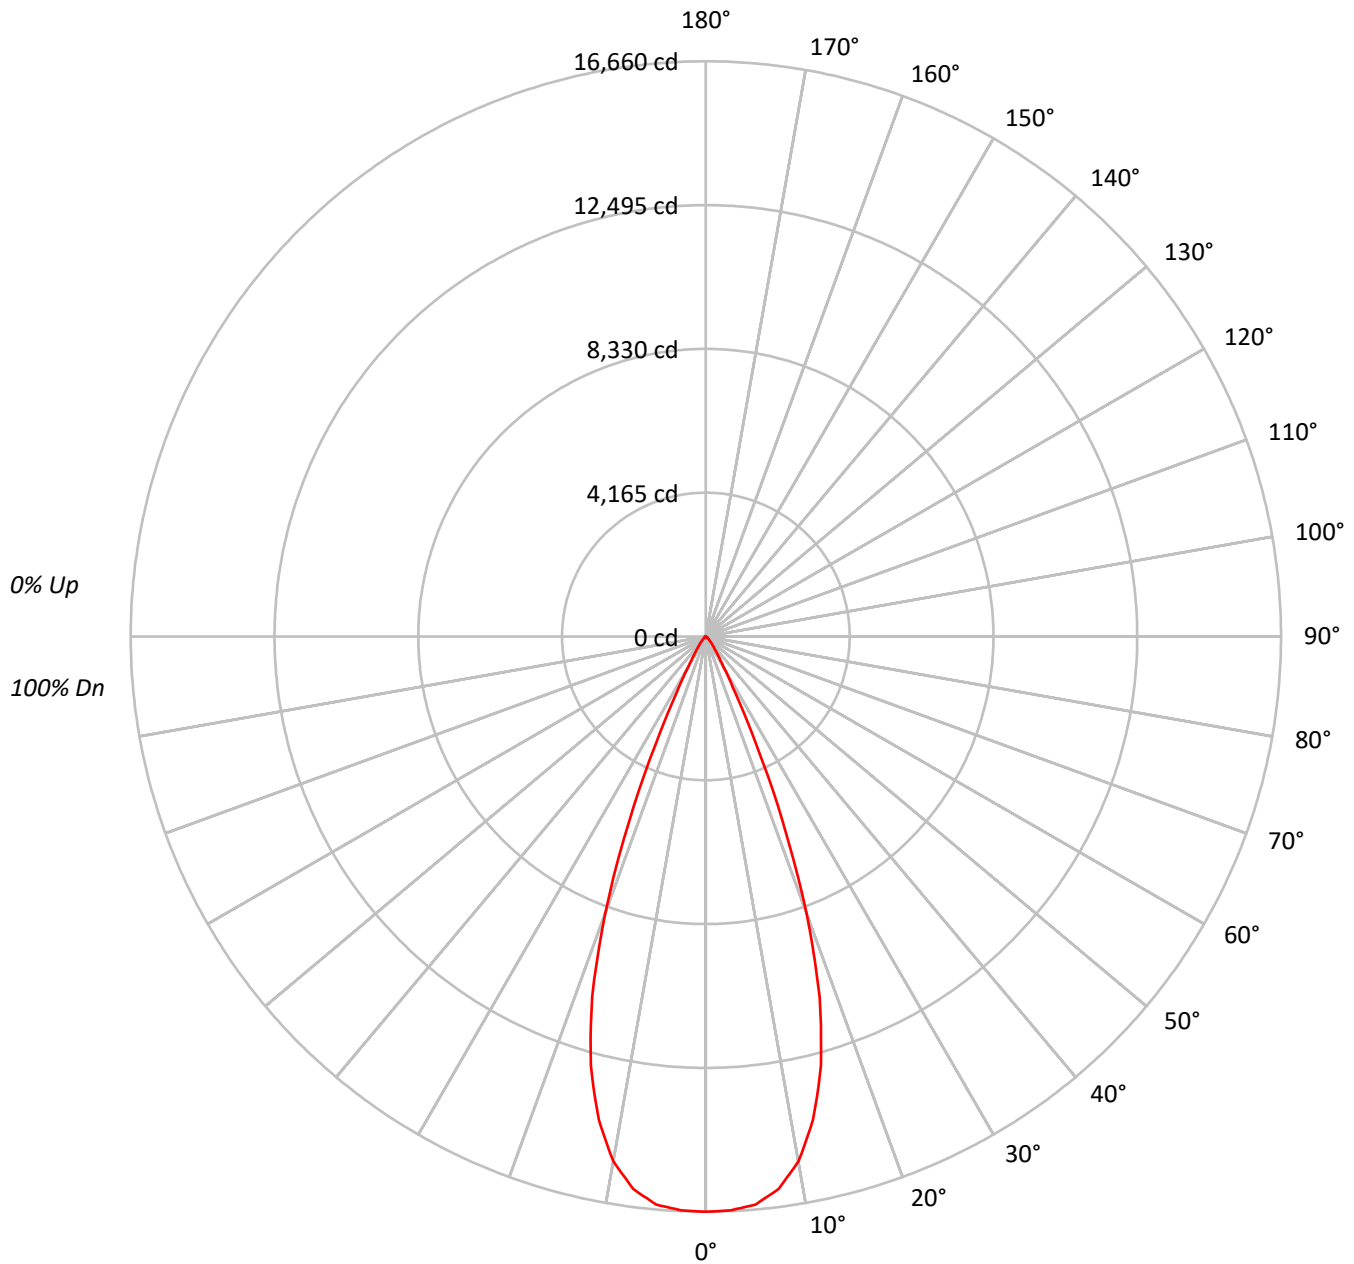



TEST NUMBER: P752404

CATALOG NUMBER: LD4D70BD010-EU4DR4070959035-4LBDP1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	115	112	110	108	112	110	108	107	106	105	103		103	101	100		99
2	110	106	103	100	108	105	102	99	102	99	97		99	97	95		96
3	106	101	97	94	104	100	96	93	97	94	92		95	93	90		93
4	102	97	92	89	101	95	91	88	93	90	87		92	89	86		90
5	99	92	88	84	97	91	87	84	90	86	83		88	85	83		87
6	95	88	84	80	94	88	83	80	86	82	80		85	82	79		84
7	92	85	80	77	91	84	80	77	83	79	76		82	79	76		81
8	89	82	77	74	88	81	77	74	80	76	73		79	76	73		78
9	86	79	74	71	85	78	74	71	77	73	71		76	73	70		76
10	83	76	71	68	82	75	71	68	75	71	68		74	70	68		73

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1820284
5°	1811444
10°	1712201
15°	1455587
20°	992087
25°	413941
30°	130150
35°	60489
40°	33461
45°	15344
50°	7445
55°	4076
60°	2120
65°	750
70°	319
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 15344 cd/sqm



TEST NUMBER: P752404

CATALOG NUMBER: LD4D70BD010-EU4DR4070959035-4LBDP1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1542.2	21.6
10°-20°	3454.9	48.3
20°-30°	1729.4	24.2
30°-40°	317.0	4.4
40°-50°	87.5	1.2
50°-60°	20.5	0.3
60°-70°	3.9	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	6726.4	94.0
0°-40°	7043.5	98.4
0°-60°	7151.5	99.9
0°-90°	7155.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	7155.5	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	16660	
5°	16516	###
15°	12868	3455
25°	3434	1729
35°	454	317
45°	99	87
55°	21	21
65°	3	4
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P752404

CATALOG NUMBER: LD4D70BD010-EU4DR4070959035-4LBDP1H

CANDELA DISTRIBUTION (FULL):

	0°
0°	16660.0
2.5°	16635.7
5°	16516.0
7.5°	16134.4
10°	15432.7
12.5°	14338.8
15°	12868.2
17.5°	10955.8
20°	8532.4
22.5°	5817.1
25°	3433.6
27.5°	1815.1
30°	1031.6
32.5°	666.7
35°	453.5
37.5°	324.1
40°	234.6
42.5°	160.6
45°	99.3
47.5°	63.3
50°	43.8
52.5°	31.1
55°	21.4
57.5°	13.6
60°	9.7
62.5°	5.8
65°	2.9
67.5°	1.9
70°	1.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-T8S5UU9





— 0°-180°







(END OF REPORT)