

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P752484

Luminaire Tested: LD4D70BD010-EU4DR4570959035-4LBDP1MW

Issue Date: 1/30/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P752484  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-36)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 1/30/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D70BD010-EU4DR4570959035-4LBDP1MW  
Description: 4 INCH ROUND DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 45° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 6643.5 lumens  
Efficiency: N/A  
Efficacy: 99.8 lumens/watt  
Spacing Criteria (0/90/45): 0.75 / 0.75 / 0.69  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 66.6  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight

TEST NUMBER: P752484

CATALOG NUMBER: LD4D70BD010-EU4DR4570959035-4LBDP1MW

### Luminous Intensity Polar Plot

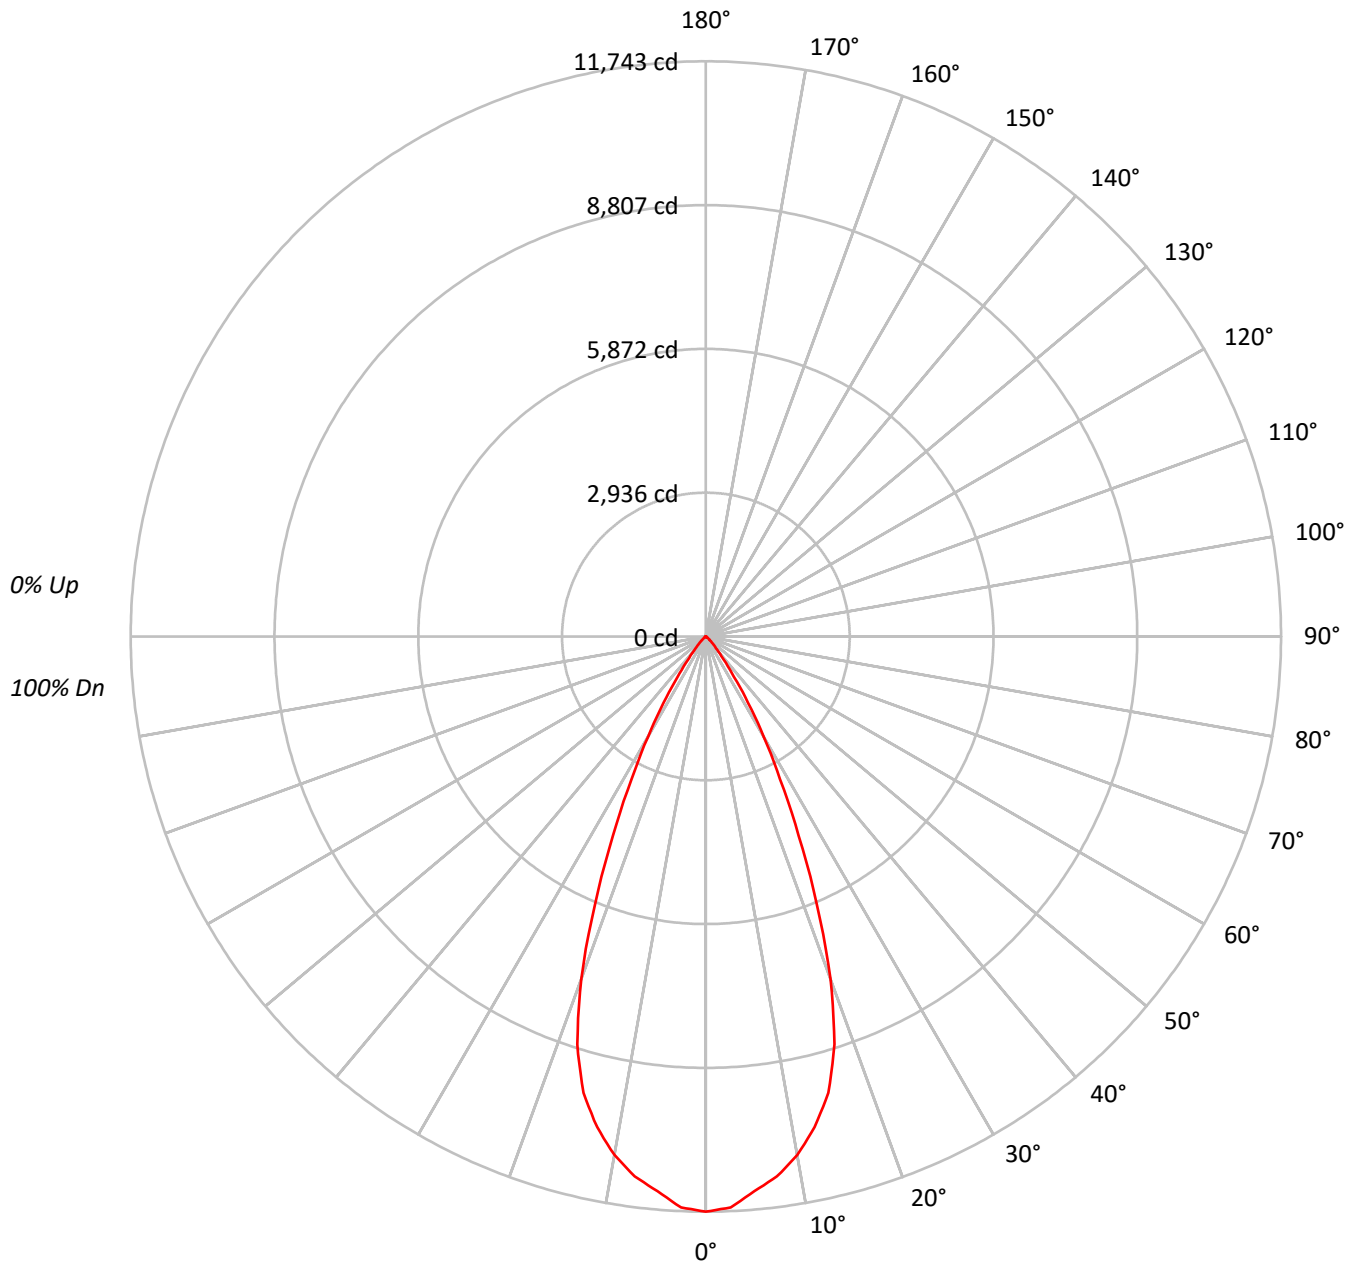



TEST NUMBER: P752484

CATALOG NUMBER: LD4D70BD010-EU4DR4570959035-4LBDP1MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|
| RF  | 20  |     |     |     | 20  |     |     |     |     | 20  |     |     |     |     | 20  |     |     |     |    | 20 |
| RC  | 80  |     |     |     | 70  |     |     |     |     | 50  |     |     |     |     | 30  |     |     |     |    | 0  |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30 | 10 |
| RCR |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 |    |    |
| 1   | 114 | 112 | 110 | 108 | 112 | 110 | 108 | 106 | 106 | 104 | 103 | 102 | 101 | 100 | 98  | 98  | 97  | 95  |    |    |
| 2   | 109 | 105 | 102 | 99  | 107 | 103 | 100 | 98  | 100 | 98  | 95  | 97  | 95  | 93  | 95  | 93  | 91  | 90  |    |    |
| 3   | 105 | 99  | 95  | 91  | 103 | 98  | 94  | 91  | 95  | 92  | 89  | 93  | 90  | 88  | 91  | 89  | 87  | 85  |    |    |
| 4   | 100 | 94  | 89  | 85  | 99  | 93  | 88  | 85  | 91  | 87  | 84  | 89  | 86  | 83  | 87  | 84  | 82  | 81  |    |    |
| 5   | 96  | 89  | 84  | 80  | 95  | 88  | 83  | 80  | 86  | 82  | 79  | 85  | 81  | 79  | 83  | 80  | 78  | 77  |    |    |
| 6   | 92  | 85  | 80  | 76  | 91  | 84  | 79  | 76  | 83  | 78  | 75  | 81  | 77  | 75  | 80  | 77  | 74  | 73  |    |    |
| 7   | 89  | 81  | 75  | 72  | 87  | 80  | 75  | 72  | 79  | 74  | 71  | 78  | 74  | 71  | 77  | 73  | 71  | 69  |    |    |
| 8   | 85  | 77  | 72  | 68  | 84  | 76  | 71  | 68  | 75  | 71  | 68  | 74  | 70  | 67  | 73  | 70  | 67  | 66  |    |    |
| 9   | 82  | 73  | 68  | 65  | 81  | 73  | 68  | 65  | 72  | 68  | 65  | 71  | 67  | 64  | 71  | 67  | 64  | 63  |    |    |
| 10  | 79  | 70  | 65  | 62  | 78  | 70  | 65  | 62  | 69  | 65  | 62  | 68  | 64  | 61  | 68  | 64  | 61  | 60  |    |    |

**AVERAGE LUMINANCE (cd/sqm):**

|     |         |
|-----|---------|
|     | 0°      |
| 0°  | 1283005 |
| 5°  | 1246481 |
| 10° | 1192539 |
| 15° | 1091425 |
| 20° | 865884  |
| 25° | 540585  |
| 30° | 297948  |
| 35° | 133783  |
| 40° | 52687   |
| 45° | 24831   |
| 50° | 11780   |
| 55° | 6153    |
| 60° | 3037    |
| 65° | 724     |
| 70° | 288     |
| 75° | 0       |
| 80° | 0       |
| 85° | 0       |

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 24831 cd/sqm



TEST NUMBER: P752484

CATALOG NUMBER: LD4D70BD010-EU4DR4570959035-4LBDP1MW

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 1067.8 | 16.1      |
| 10°-20°   | 2628.1 | 39.6      |
| 20°-30°   | 2081.2 | 31.3      |
| 30°-40°   | 693.0  | 10.4      |
| 40°-50°   | 137.5  | 2.1       |
| 50°-60°   | 31.2   | 0.5       |
| 60°-70°   | 4.5    | 0.1       |
| 70°-80°   | 0.1    | 0.0       |
| 80°-90°   | 0.0    | 0.0       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| 0°-30°    | 5777.1 | 87.0      |
| 0°-40°    | 6470.1 | 97.4      |
| 0°-60°    | 6638.9 | 99.9      |
| 0°-90°    | 6643.5 | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 6643.5 | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°    | Flux |
|-----|-------|------|
| 0°  | 11743 |      |
| 5°  | 11365 | ###  |
| 15° | 9649  | 2628 |
| 25° | 4484  | 2081 |
| 35° | 1003  | 693  |
| 45° | 161   | 138  |
| 55° | 32    | 31   |
| 65° | 3     | 5    |
| 75° | 0     | 0    |
| 85° | 0     | 0    |
| 90° | 0     |      |



TEST NUMBER: P752484

CATALOG NUMBER: LD4D70BD010-EU4DR4570959035-4LBDP1MW

**CANDELA DISTRIBUTION (FULL):**

|       | 0°      |
|-------|---------|
| 0°    | 11742.6 |
| 2.5°  | 11665.9 |
| 5°    | 11364.9 |
| 7.5°  | 11116.4 |
| 10°   | 10748.8 |
| 12.5° | 10259.3 |
| 15°   | 9648.8  |
| 17.5° | 8730.8  |
| 20°   | 7447.0  |
| 22.5° | 5917.5  |
| 25°   | 4484.1  |
| 27.5° | 3283.4  |
| 30°   | 2361.6  |
| 32.5° | 1606.1  |
| 35°   | 1003.0  |
| 37.5° | 594.8   |
| 40°   | 369.4   |
| 42.5° | 242.9   |
| 45°   | 160.7   |
| 47.5° | 103.4   |
| 50°   | 69.3    |
| 52.5° | 46.2    |
| 55°   | 32.3    |
| 57.5° | 21.2    |
| 60°   | 13.9    |
| 62.5° | 7.4     |
| 65°   | 2.8     |
| 67.5° | 0.9     |
| 70°   | 0.9     |
| 72.5° | 0.0     |
| 75°   | 0.0     |
| 77.5° | 0.0     |
| 80°   | 0.0     |
| 82.5° | 0.0     |
| 85°   | 0.0     |
| 87.5° | 0.0     |
| 90°   | 0.0     |



Report Generated By 670245859 / DESKTOP-T8S5UU9





— 0°-180°







(END OF REPORT)