

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P752559

Luminaire Tested: LD4D70BD010-EU4DR5070959035-4LBDP1B

Issue Date: 1/30/2024

Test Information

Test Method: LM-79-2019
Report Number: P752559
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-44)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/30/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D70BD010-EU4DR5070959035-4LBDP1B
Description: 4 INCH ROUND DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 50° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6340.5 lumens
Efficiency: N/A
Efficacy: 95.2 lumens/watt
Spacing Criteria (0/90/45): 0.8 / 0.8 / 0.73
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 66.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P752559

CATALOG NUMBER: LD4D70BD010-EU4DR5070959035-4LBDP1B

Luminous Intensity Polar Plot

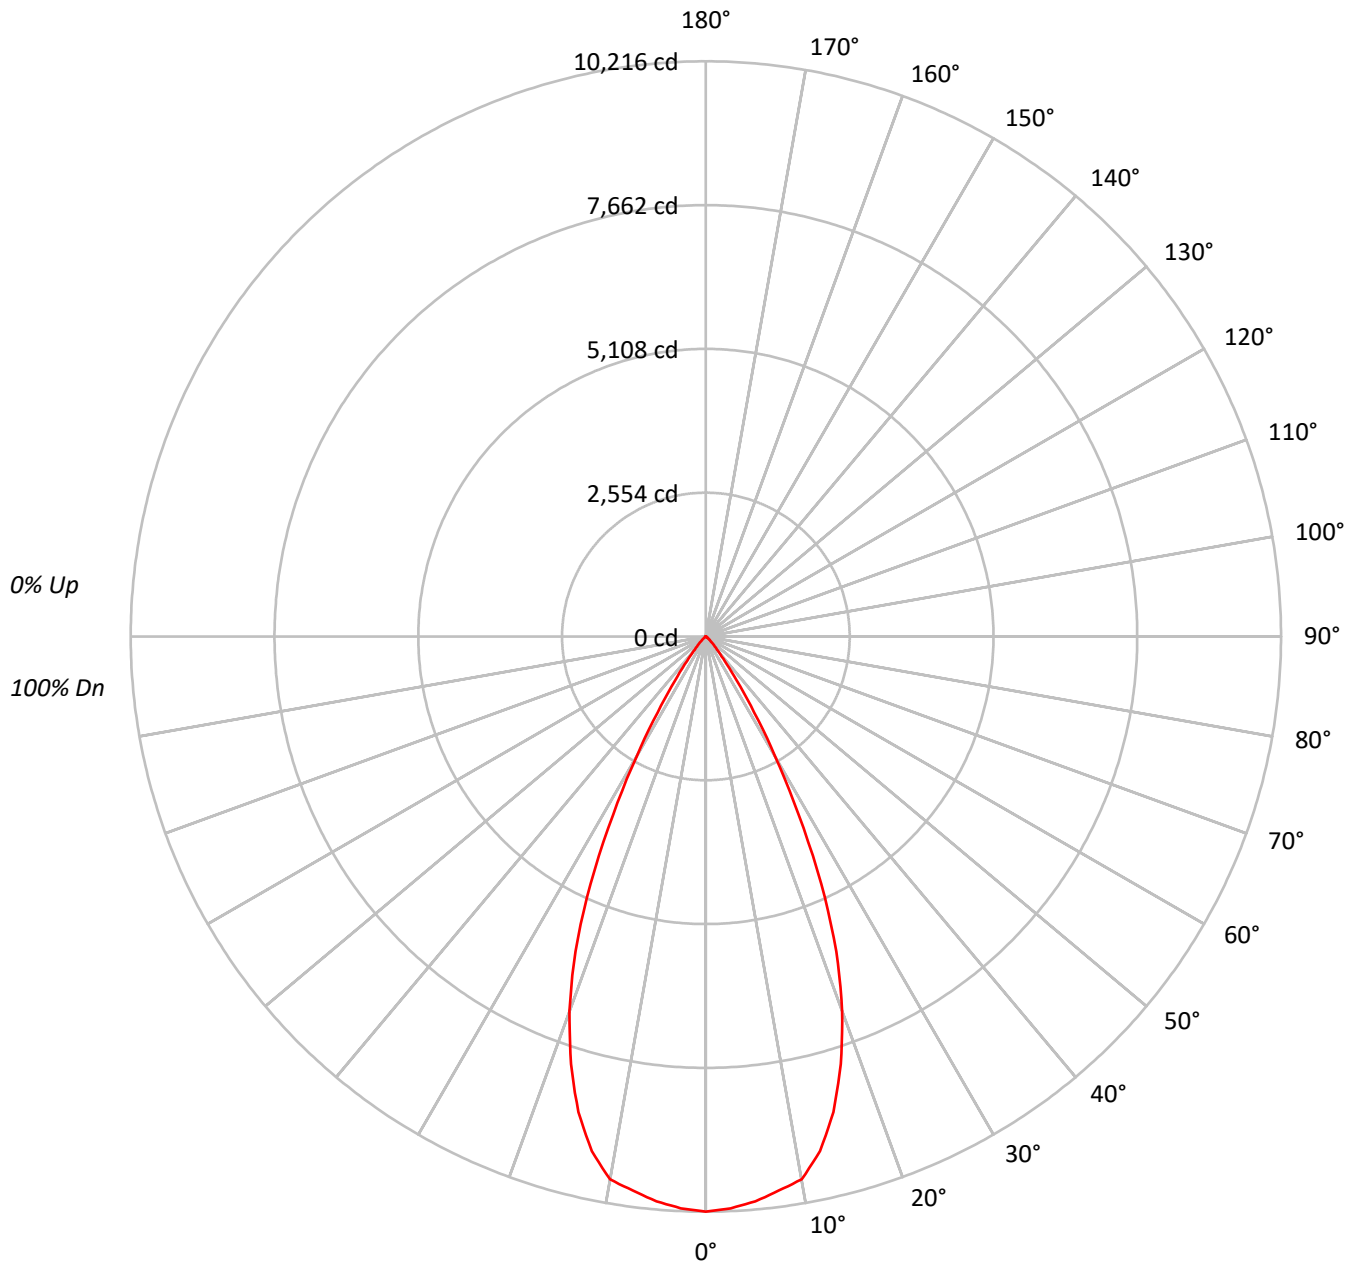

TEST NUMBER: P752559

CATALOG NUMBER: LD4D70BD010-EU4DR5070959035-4LBDP1B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	114	112	109	107	112	110	108	106	106	104	102	102	101	99	98	97	97	95		
2	109	105	101	98	107	103	100	97	100	98	95	97	95	93	95	93	91	90		
3	105	99	95	91	103	98	94	90	95	92	89	93	90	88	91	88	86	85		
4	100	94	89	85	99	93	88	85	90	87	84	89	85	83	87	84	82	80		
5	96	89	84	80	95	88	83	79	86	82	79	85	81	78	83	80	77	76		
6	92	84	79	75	91	83	79	75	82	78	74	81	77	74	79	76	74	72		
7	88	80	75	71	87	79	74	71	78	74	71	77	73	70	76	73	70	69		
8	85	76	71	67	84	76	71	67	75	70	67	74	70	67	73	69	66	65		
9	81	73	68	64	80	72	67	64	71	67	64	71	67	64	70	66	63	62		
10	78	70	64	61	77	69	64	61	68	64	61	68	64	61	67	63	60	59		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1116219
5°	1104513
10°	1086330
15°	989191
20°	823119
25°	584286
30°	309264
35°	126033
40°	46811
45°	21432
50°	8788
55°	4591
60°	2251
65°	672
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 21432 cd/sqm



TEST NUMBER: P752559

CATALOG NUMBER: LD4D70BD010-EU4DR5070959035-4LBDP1B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	951.9	15.0
10°-20°	2405.6	37.9
20°-30°	2160.8	34.1
30°-40°	676.5	10.7
40°-50°	118.5	1.9
50°-60°	23.6	0.4
60°-70°	3.6	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	5518.3	87.0
0°-40°	6194.8	97.7
0°-60°	6336.9	99.9
0°-90°	6340.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6340.5	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	10216	
5°	10070	952
15°	8745	2406
25°	4847	2161
35°	945	677
45°	139	118
55°	24	24
65°	3	4
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P752559

CATALOG NUMBER: LD4D70BD010-EU4DR5070959035-4LBDP1B

CANDELA DISTRIBUTION (FULL):

	0°
0°	10216.1
2.5°	10165.3
5°	10070.5
7.5°	9925.8
10°	9791.5
12.5°	9360.8
15°	8745.0
17.5°	7962.9
20°	7079.2
22.5°	6056.8
25°	4846.6
27.5°	3563.3
30°	2451.3
32.5°	1596.0
35°	944.9
37.5°	542.6
40°	328.2
42.5°	213.6
45°	138.7
47.5°	84.4
50°	51.7
52.5°	35.3
55°	24.1
57.5°	16.4
60°	10.3
62.5°	6.0
65°	2.6
67.5°	0.9
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report





— 0°-180°







(END OF REPORT)