

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P752562

Luminaire Tested: LD4D70BD010-EU4DR5070959035-4LBDP1MW

Issue Date: 1/30/2024

Test Information

Test Method: LM-79-2019
Report Number: P752562
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-44)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/30/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D70BD010-EU4DR5070959035-4LBDP1MW
Description: 4 INCH ROUND DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 50° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6762.8 lumens
Efficiency: N/A
Efficacy: 101.5 lumens/watt
Spacing Criteria (0/90/45): 0.8 / 0.8 / 0.73
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 66.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P752562

CATALOG NUMBER: LD4D70BD010-EU4DR5070959035-4LBDP1MW

Luminous Intensity Polar Plot

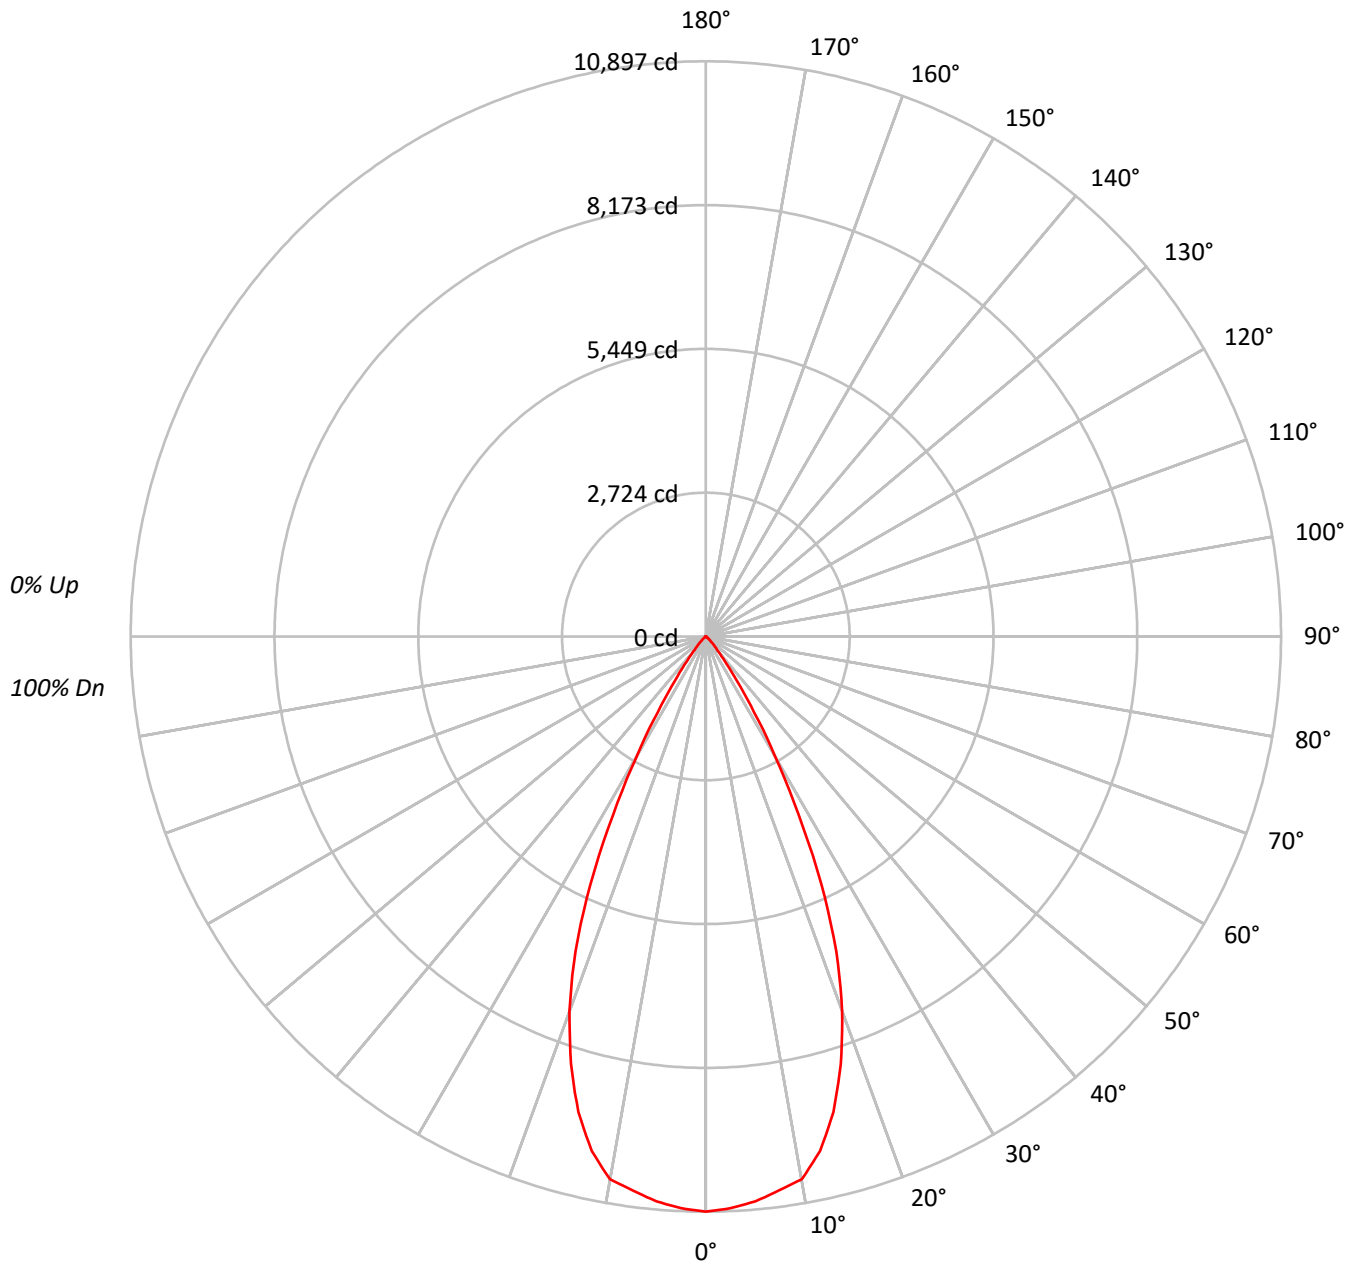



TEST NUMBER: P752562

CATALOG NUMBER: LD4D70BD010-EU4DR5070959035-4LBDP1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					0
RW	70	50	30	10	70	50	30	10		50	30	10			50	30	10			0
RCR																				
0	119	119	119	119	116	116	116	116		111	111	111			106	106	106			100
1	114	112	109	107	112	110	108	106		106	104	102			102	101	99			95
2	109	105	101	98	107	103	100	97		100	98	95			97	95	93			90
3	105	99	95	91	103	98	94	90		95	92	89			93	90	88			85
4	100	94	89	85	99	93	88	85		90	87	84			89	85	83			80
5	96	89	84	80	95	88	83	79		86	82	79			85	81	78			76
6	92	84	79	75	91	83	79	75		82	78	74			81	77	74			72
7	88	80	75	71	87	79	74	71		78	74	71			77	73	70			69
8	85	76	71	67	84	76	71	67		75	70	67			74	70	67			65
9	81	73	68	64	80	72	67	64		71	67	64			71	67	64			62
10	78	70	64	61	77	69	64	61		68	64	61			68	64	61			59

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1190571
5°	1178096
10°	1158690
15°	1055081
20°	877953
25°	623214
30°	329867
35°	134423
40°	49920
45°	22853
50°	9366
55°	4896
60°	2404
65°	724
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 22853 cd/sqm



TEST NUMBER: P752562

CATALOG NUMBER: LD4D70BD010-EU4DR5070959035-4LBDP1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1015.3	15.0
10°-20°	2565.8	37.9
20°-30°	2304.8	34.1
30°-40°	721.6	10.7
40°-50°	126.3	1.9
50°-60°	25.2	0.4
60°-70°	3.8	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	5885.9	87.0
0°-40°	6607.5	97.7
0°-60°	6759.0	99.9
0°-90°	6762.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6762.8	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	10897	
5°	10741	###
15°	9328	2566
25°	5170	2305
35°	1008	722
45°	148	126
55°	26	25
65°	3	4
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P752562

CATALOG NUMBER: LD4D70BD010-EU4DR5070959035-4LBDP1MW

CANDELA DISTRIBUTION (FULL):

0°	
0°	10896.6
2.5°	10842.4
5°	10741.4
7.5°	10587.0
10°	10443.7
12.5°	9984.4
15°	9327.5
17.5°	8493.3
20°	7550.8
22.5°	6460.3
25°	5169.5
27.5°	3800.6
30°	2614.6
32.5°	1702.3
35°	1007.8
37.5°	578.8
40°	350.0
42.5°	227.8
45°	147.9
47.5°	90.0
50°	55.1
52.5°	37.7
55°	25.7
57.5°	17.5
60°	11.0
62.5°	6.4
65°	2.8
67.5°	0.9
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-T8S5UU9





— 0°-180°







(END OF REPORT)