

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P752653

Luminaire Tested: LD4D70BD010-EU4DR5570959040-4LBDP1MW

Issue Date: 1/30/2024

Test Information

Test Method: LM-79-2019
Report Number: P752653
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-52)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/30/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D70BD010-EU4DR5570959040-4LBDP1MW
Description: 4 INCH ROUND DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 55° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6716.4 lumens
Efficiency: N/A
Efficacy: 100.8 lumens/watt
Spacing Criteria (0/90/45): 0.89 / 0.89 / 0.87
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 66.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P752653

CATALOG NUMBER: LD4D70BD010-EU4DR5570959040-4LBDP1MW

Luminous Intensity Polar Plot

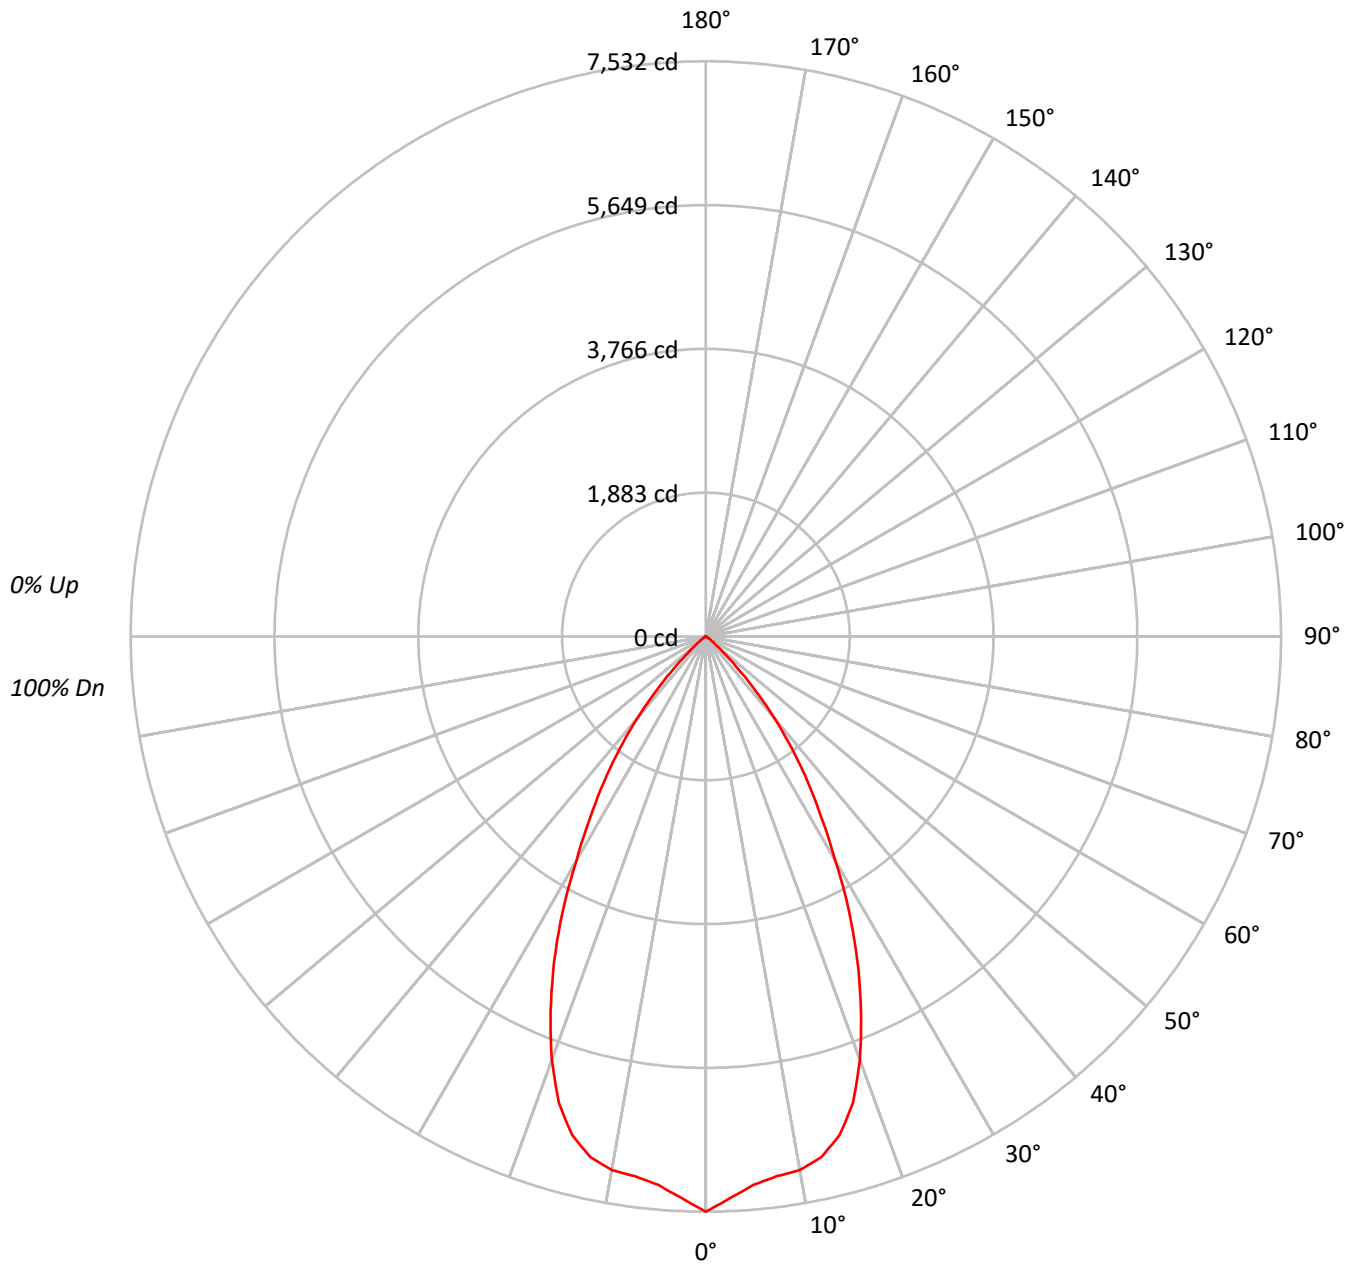



TEST NUMBER: P752653

CATALOG NUMBER: LD4D70BD010-EU4DR5570959040-4LBDP1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	111	108	106	111	109	106	104	105	103	101		101	99	98		97
2	108	103	99	96	106	101	98	95	98	95	92		95	93	90		92
3	102	96	91	87	100	95	90	86	92	88	85		90	86	84		87
4	97	90	84	80	95	88	83	79	86	82	78		84	81	78		82
5	92	84	78	74	91	83	77	73	81	76	73		79	75	72		78
6	88	79	73	68	86	78	72	68	76	71	68		75	70	67		74
7	83	74	68	64	82	73	67	63	72	67	63		71	66	63		70
8	79	69	63	59	78	69	63	59	68	63	59		67	62	59		66
9	75	66	60	56	74	65	59	55	64	59	55		63	58	55		62
10	72	62	56	52	71	61	56	52	61	56	52		60	55	52		59

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	822897
5°	790209
10°	787230
15°	764613
20°	685591
25°	566601
30°	427997
35°	310328
40°	198598
45°	90702
50°	29661
55°	12801
60°	5507
65°	724
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 90702 cd/sqm



TEST NUMBER: P752653

CATALOG NUMBER: LD4D70BD010-EU4DR5570959040-4LBDP1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	685.6	10.2
10°-20°	1871.1	27.9
20°-30°	2132.3	31.7
30°-40°	1451.5	21.6
40°-50°	500.2	7.4
50°-60°	69.1	1.0
60°-70°	6.7	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4688.9	69.8
0°-40°	6140.4	91.4
0°-60°	6709.8	99.9
0°-90°	6716.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6716.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	7532	
5°	7205	686
15°	6760	1871
25°	4700	2132
35°	2327	1452
45°	587	500
55°	67	69
65°	3	7
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P752653

CATALOG NUMBER: LD4D70BD010-EU4DR5570959040-4LBDP1MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	7531.5
2.5°	7358.8
5°	7204.8
7.5°	7129.2
10°	7095.6
12.5°	6983.6
15°	6759.6
17.5°	6404.1
20°	5896.4
22.5°	5310.3
25°	4699.9
27.5°	4064.4
30°	3392.4
32.5°	2823.1
35°	2326.6
37.5°	1854.4
40°	1392.4
42.5°	965.0
45°	587.0
47.5°	316.4
50°	174.5
52.5°	103.6
55°	67.2
57.5°	42.9
60°	25.2
62.5°	11.2
65°	2.8
67.5°	0.9
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-T8S5UU9





— 0°-180°







(END OF REPORT)