

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P752811

Luminaire Tested: LD4D70BD010-EU4DR6570959040-4LBS1H

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P752811
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-147)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D70BD010-EU4DR6570959040-4LBS1H
Description: 4 INCH ROUND SHALLOW SEMI-SPECULAR CLEAR TRIM, WITH 65° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6617.8 lumens
Efficiency: N/A
Efficacy: 99.4 lumens/watt
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.96
Luminous Opening: Circular (Dia: 0.48' x H: 0')
CIE Type: Direct

Input Watts (W): 66.6
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P752811

CATALOG NUMBER: LD4D70BD010-EU4DR6570959040-4LBS1H

Luminous Intensity Polar Plot

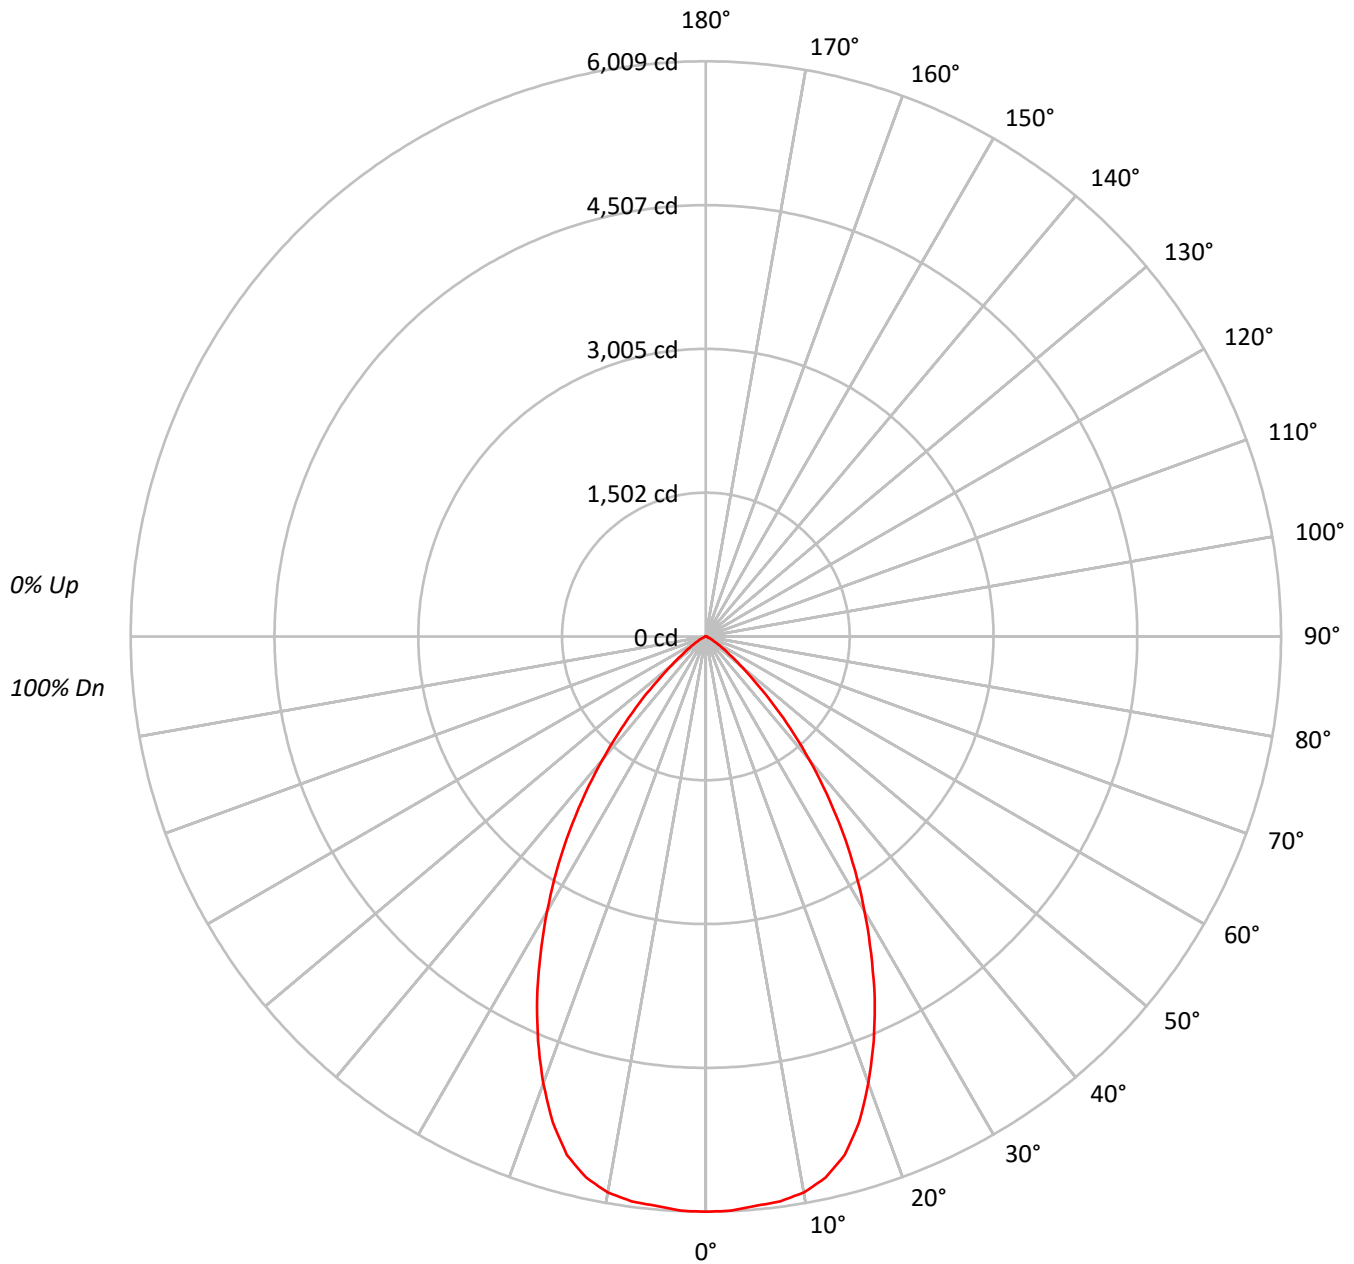



TEST NUMBER: P752811

CATALOG NUMBER: LD4D70BD010-EU4DR6570959040-4LBS1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	110	107	105	111	108	105	103	104	102	100		100	99	97		97
2	107	102	97	94	105	100	96	92	97	93	90		94	91	88		91
3	101	94	88	84	99	92	87	83	90	86	82		87	84	81		85
4	95	87	81	76	93	86	80	76	84	79	75		82	77	74		80
5	90	81	74	70	88	80	74	69	78	73	69		76	72	68		75
6	85	75	69	64	83	74	68	64	73	67	63		71	67	63		70
7	80	70	64	59	79	69	63	59	68	63	59		67	62	58		66
8	76	66	59	55	75	65	59	55	64	58	54		63	58	54		62
9	72	61	55	51	71	61	55	51	60	54	51		59	54	50		58
10	68	58	52	47	67	57	51	47	57	51	47		56	51	47		55

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	350937
5°	350056
10°	349756
15°	338974
20°	308591
25°	268921
30°	223668
35°	177218
40°	127909
45°	80811
50°	42123
55°	22391
60°	11763
65°	6468
70°	2715
75°	2979
80°	2085
85°	1742

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 80811 cd/sqm



TEST NUMBER: P752811

CATALOG NUMBER: LD4D70BD010-EU4DR6570959040-4LBS1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	568.2	8.6
10°-20°	1556.1	23.5
20°-30°	1902.0	28.7
30°-40°	1543.3	23.3
40°-50°	769.1	11.6
50°-60°	214.5	3.2
60°-70°	48.8	0.7
70°-80°	12.7	0.2
80°-90°	3.2	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4026.4	60.8
0°-40°	5569.6	84.2
0°-60°	6553.2	99.0
0°-90°	6617.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6617.8	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	6009	
5°	5971	568
15°	5606	1556
25°	4173	1902
35°	2486	1543
45°	978	769
55°	220	214
65°	47	49
75°	13	13
85°	3	3
90°	0	



TEST NUMBER: P752811

CATALOG NUMBER: LD4D70BD010-EU4DR6570959040-4LBS1H

CANDELA DISTRIBUTION (FULL):

	0°
0°	6008.8
2.5°	6004.4
5°	5970.9
7.5°	5951.4
10°	5897.6
12.5°	5788.1
15°	5606.2
17.5°	5321.8
20°	4965.1
22.5°	4580.1
25°	4173.1
27.5°	3737.7
30°	3316.6
32.5°	2900.7
35°	2485.6
37.5°	2071.5
40°	1677.7
42.5°	1308.6
45°	978.4
47.5°	681.7
50°	463.6
52.5°	319.6
55°	219.9
57.5°	148.3
60°	100.7
62.5°	69.8
65°	46.8
67.5°	23.8
70°	15.9
72.5°	15.0
75°	13.2
77.5°	8.8
80°	6.2
82.5°	4.4
85°	2.6
87.5°	1.8
90°	0.0



Report Generated By 670245859 / DESKTOP-T8S5UU9





— 0°-180°







(END OF REPORT)