

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P756344

Luminaire Tested: LD4D95BD010-EU4DR4570959024-4LBDP1LI

Issue Date: 1/30/2024

Test Information

Test Method: LM-79-2019
Report Number: P756344
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-36)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/30/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D95BD010-EU4DR4570959024-4LBDP1LI
Description: 4 INCH ROUND DEEP 45° CUTOFF SPECULAR CLEAR TRIM, WITH 45° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 8112.5 lumens
Efficiency: N/A
Efficacy: 81.8 lumens/watt
Spacing Criteria (0/90/45): 0.75 / 0.75 / 0.69
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 99.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P756344

CATALOG NUMBER: LD4D95BD010-EU4DR4570959024-4LBDP1LI

Luminous Intensity Polar Plot

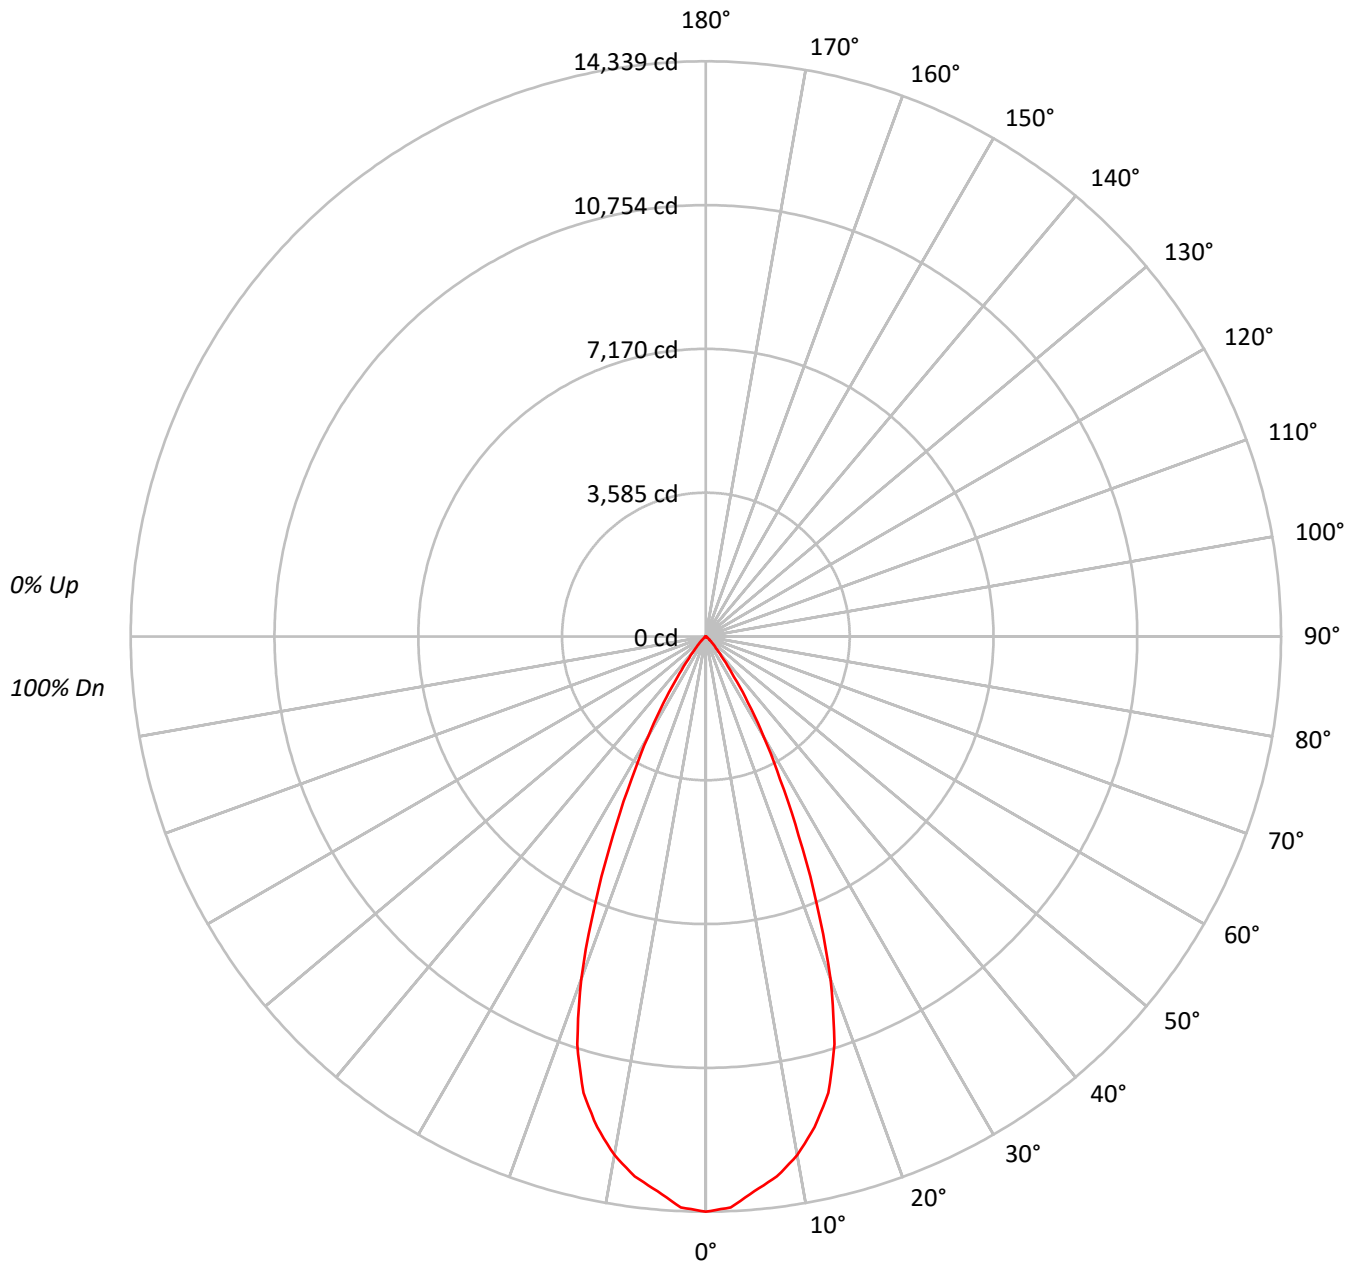

TEST NUMBER: P756344

CATALOG NUMBER: LD4D95BD010-EU4DR4570959024-4LBDP1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	112	110	108	112	110	108	106	106	104	103		102	101	100		98
2	109	105	102	99	107	103	100	98	100	98	95		97	95	93		95
3	105	99	95	91	103	98	94	91	95	92	89		93	90	88		91
4	100	94	89	85	99	93	88	85	91	87	84		89	86	83		87
5	96	89	84	80	95	88	83	80	86	82	79		85	81	79		83
6	92	85	80	76	91	84	79	76	83	78	75		81	77	75		80
7	89	81	75	72	87	80	75	72	79	74	71		78	74	71		77
8	85	77	72	68	84	76	71	68	75	71	68		74	70	67		73
9	82	73	68	65	81	73	68	65	72	68	65		71	67	64		71
10	79	70	65	62	78	70	65	62	69	65	62		68	64	61		68

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1566712
5°	1522102
10°	1456236
15°	1332767
20°	1057339
25°	660116
30°	363830
35°	163367
40°	64340
45°	30316
50°	14380
55°	7524
60°	3693
65°	879
70°	351
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 30316 cd/sqm



TEST NUMBER: P756344

CATALOG NUMBER: LD4D95BD010-EU4DR4570959024-4LBDP1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1304.0	16.1
10°-20°	3209.2	39.6
20°-30°	2541.4	31.3
30°-40°	846.3	10.4
40°-50°	167.9	2.1
50°-60°	38.1	0.5
60°-70°	5.5	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	7054.5	87.0
0°-40°	7900.8	97.4
0°-60°	8106.9	99.9
0°-90°	8112.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	8112.5	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	14339	
5°	13878	###
15°	11782	3209
25°	5476	2541
35°	1225	846
45°	196	168
55°	40	38
65°	3	5
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P756344

CATALOG NUMBER: LD4D95BD010-EU4DR4570959024-4LBDP1LI

CANDELA DISTRIBUTION (FULL):

0°	
0°	14339.2
2.5°	14245.5
5°	13877.9
7.5°	13574.5
10°	13125.6
12.5°	12527.9
15°	11782.4
17.5°	10661.3
20°	9093.6
22.5°	7226.0
25°	5475.6
27.5°	4009.4
30°	2883.8
32.5°	1961.3
35°	1224.8
37.5°	726.3
40°	451.1
42.5°	296.6
45°	196.2
47.5°	126.3
50°	84.6
52.5°	56.4
55°	39.5
57.5°	25.9
60°	16.9
62.5°	9.0
65°	3.4
67.5°	1.1
70°	1.1
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-T8S5UU9





— 0°-180°







(END OF REPORT)