

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P756356

Luminaire Tested: LD4D95BD010-EU4DR4570959027-4LBDP1H

Issue Date: 1/30/2024

Test Information

Test Method: LM-79-2019
Report Number: P756356
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-36)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/30/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D95BD010-EU4DR4570959027-4LBDP1H
Description: 4 INCH ROUND DEEP 45° CUTOFF SEMI-SPECULAR CLEAR TRIM, WITH 45° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 8752.2 lumens
Efficiency: N/A
Efficacy: 88.2 lumens/watt
Spacing Criteria (0/90/45): 0.75 / 0.75 / 0.69
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 99.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P756356

CATALOG NUMBER: LD4D95BD010-EU4DR4570959027-4LBDP1H

Luminous Intensity Polar Plot

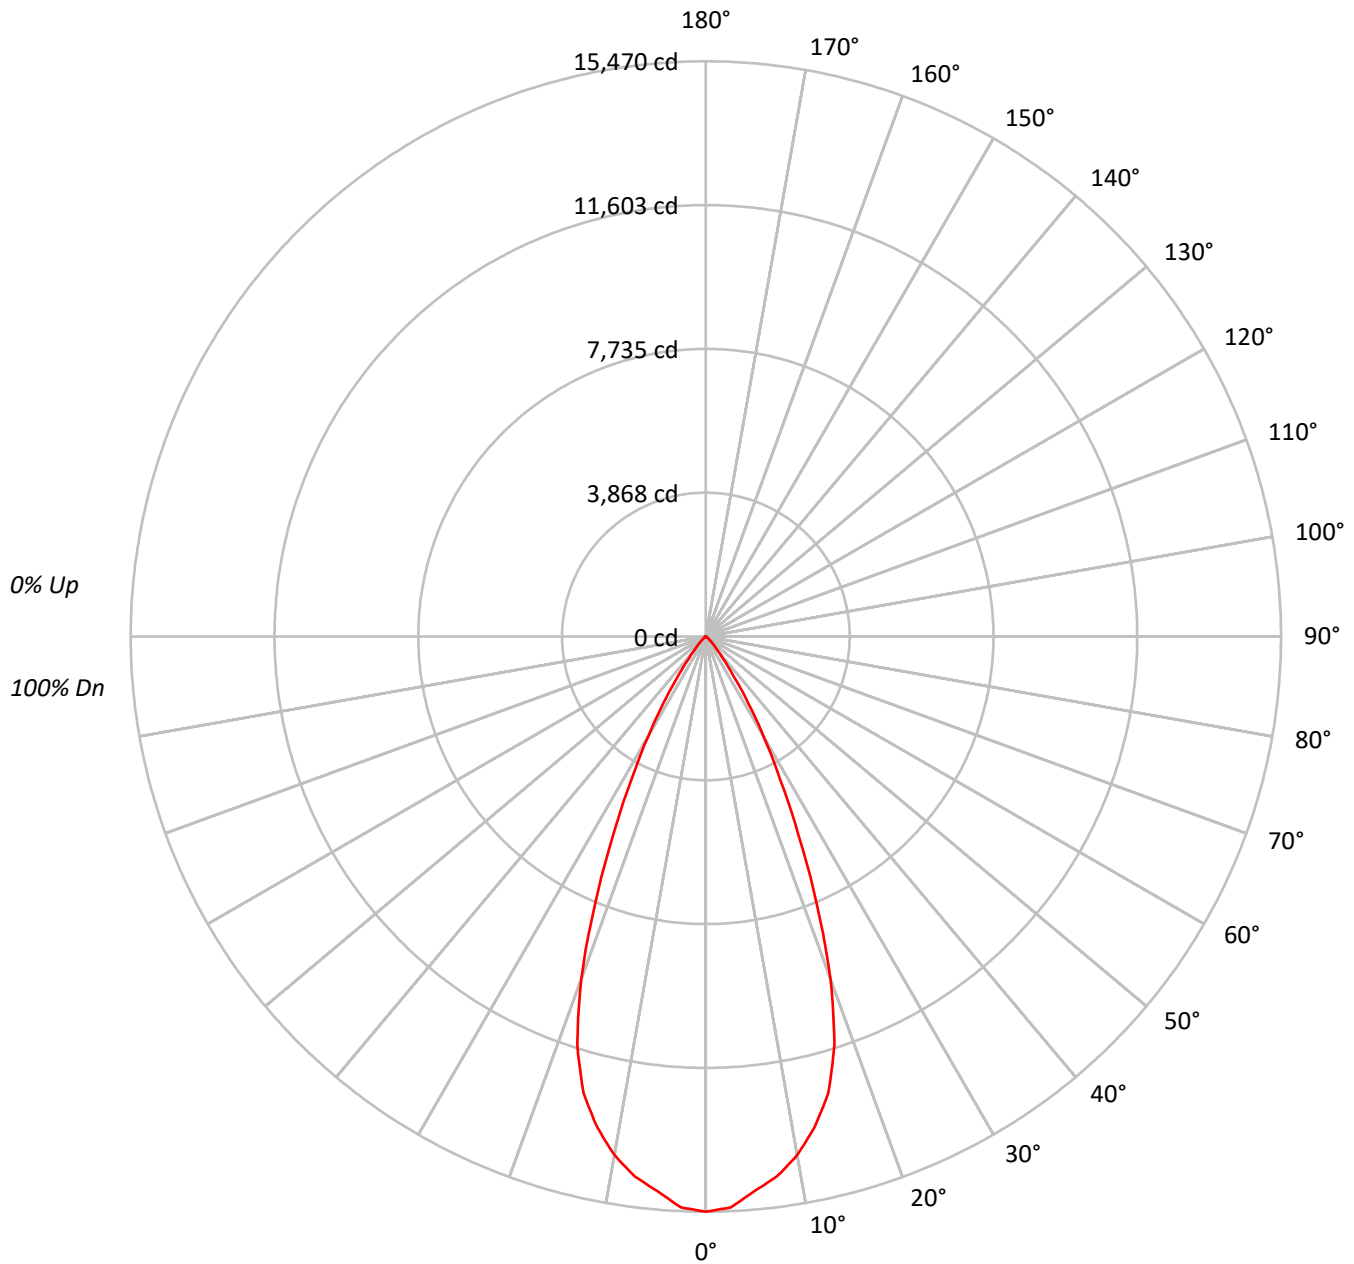

TEST NUMBER: P756356

CATALOG NUMBER: LD4D95BD010-EU4DR4570959027-4LBDP1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	112	110	108	112	110	108	106	106	104	103		102	101	100		98
2	109	105	102	99	107	103	100	98	100	98	95		97	95	93		95
3	105	99	95	91	103	98	94	91	95	92	89		93	90	88		91
4	100	94	89	85	99	93	88	85	91	87	84		89	86	83		87
5	96	89	84	80	95	88	83	80	86	82	79		85	81	79		83
6	92	85	80	76	91	84	79	76	83	78	75		81	77	75		80
7	89	81	75	72	87	80	75	72	79	74	71		78	74	71		77
8	85	77	72	68	84	76	71	68	75	71	68		74	70	67		73
9	82	73	68	65	81	73	68	65	72	68	65		71	67	64		71
10	79	70	65	62	78	70	65	62	69	65	62		68	64	61		68

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1690220
5°	1642101
10°	1571044
15°	1437839
20°	1140707
25°	712160
30°	392520
35°	176252
40°	69418
45°	32711
50°	15519
55°	8115
60°	3999
65°	957
70°	383
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 32711 cd/sqm



TEST NUMBER: P756356

CATALOG NUMBER: LD4D95BD010-EU4DR4570959027-4LBDP1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1406.8	16.1
10°-20°	3462.2	39.6
20°-30°	2741.7	31.3
30°-40°	913.0	10.4
40°-50°	181.2	2.1
50°-60°	41.2	0.5
60°-70°	5.9	0.1
70°-80°	0.2	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	7610.7	87.0
0°-40°	8523.7	97.4
0°-60°	8746.1	99.9
0°-90°	8752.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	8752.2	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	15470	
5°	14972	###
15°	12711	3462
25°	5907	2742
35°	1321	913
45°	212	181
55°	43	41
65°	4	6
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P756356

CATALOG NUMBER: LD4D95BD010-EU4DR4570959027-4LBDP1H

CANDELA DISTRIBUTION (FULL):

	0°
0°	15469.6
2.5°	15368.6
5°	14972.0
7.5°	14644.7
10°	14160.4
12.5°	13515.5
15°	12711.3
17.5°	11501.8
20°	9810.6
22.5°	7795.6
25°	5907.3
27.5°	4325.5
30°	3111.2
32.5°	2115.9
35°	1321.4
37.5°	783.6
40°	486.7
42.5°	320.0
45°	211.7
47.5°	136.3
50°	91.3
52.5°	60.8
55°	42.6
57.5°	28.0
60°	18.3
62.5°	9.7
65°	3.7
67.5°	1.2
70°	1.2
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-T8S5UU9





— 0°-180°







(END OF REPORT)