

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P756361

Luminaire Tested: LD4D95BD010-EU4DR4570959027-4LBS1LI

Issue Date: 1/30/2024

Test Information

Test Method: LM-79-2019
Report Number: P756361
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-36)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/30/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D95BD010-EU4DR4570959027-4LBS1LI
Description: 4 INCH ROUND SHALLOW SPECULAR CLEAR TRIM, WITH 45° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 9673.4 lumens
Efficiency: N/A
Efficacy: 97.5 lumens/watt
Spacing Criteria (0/90/45): 0.75 / 0.75 / 0.69
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 99.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P756361

CATALOG NUMBER: LD4D95BD010-EU4DR4570959027-4LBS1LI

Luminous Intensity Polar Plot

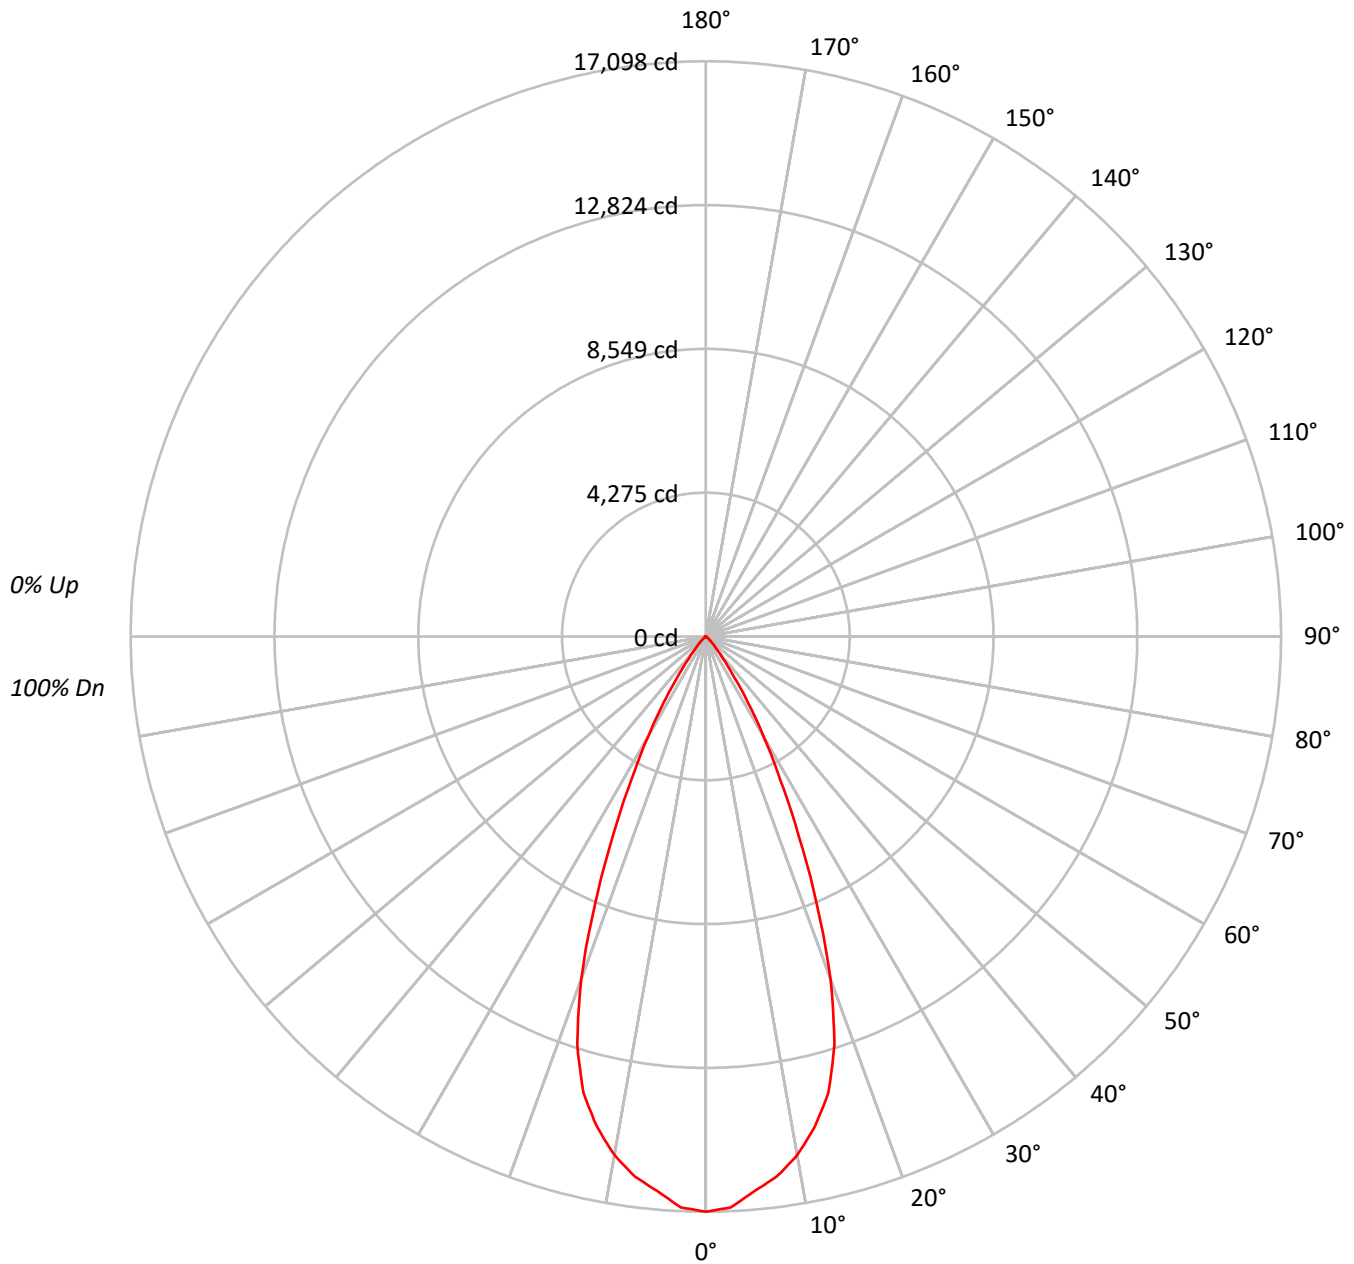



TEST NUMBER: P756361

CATALOG NUMBER: LD4D95BD010-EU4DR4570959027-4LBS1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	112	110	108	112	110	108	106	106	104	103		102	101	100		98
2	109	105	102	99	107	103	100	98	100	98	95		97	95	93		95
3	105	99	95	91	103	98	94	91	95	92	89		93	90	88		91
4	100	94	89	85	99	93	88	85	91	87	84		89	86	83		87
5	96	89	84	80	95	88	83	80	86	82	79		85	81	79		83
6	92	85	80	76	91	84	79	76	83	78	75		81	77	75		80
7	89	81	75	72	87	80	75	72	79	74	71		78	74	71		77
8	85	77	72	68	84	76	71	68	75	71	68		74	70	67		73
9	82	73	68	65	81	73	68	65	72	68	65		71	67	64		71
10	79	70	65	62	78	70	65	62	69	65	62		68	64	61		68

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1868140
5°	1814953
10°	1736420
15°	1589187
20°	1260782
25°	787122
30°	433838
35°	194806
40°	76721
45°	36157
50°	17151
55°	8972
60°	4414
65°	1034
70°	415
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 36157 cd/sqm



TEST NUMBER: P756361

CATALOG NUMBER: LD4D95BD010-EU4DR4570959027-4LBS1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1554.8	16.1
10°-20°	3826.7	39.6
20°-30°	3030.3	31.3
30°-40°	1009.1	10.4
40°-50°	200.3	2.1
50°-60°	45.5	0.5
60°-70°	6.5	0.1
70°-80°	0.2	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	8411.8	87.0
0°-40°	9420.9	97.4
0°-60°	9666.7	99.9
0°-90°	9673.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	9673.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	17098	
5°	16548	###
15°	14049	3827
25°	6529	3030
35°	1460	1009
45°	234	200
55°	47	45
65°	4	7
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P756361

CATALOG NUMBER: LD4D95BD010-EU4DR4570959027-4LBS1LI

CANDELA DISTRIBUTION (FULL):

	0°
0°	17098.0
2.5°	16986.4
5°	16548.0
7.5°	16186.2
10°	15651.0
12.5°	14938.2
15°	14049.3
17.5°	12712.6
20°	10843.3
22.5°	8616.2
25°	6529.1
27.5°	4780.8
30°	3438.7
32.5°	2338.6
35°	1460.5
37.5°	866.1
40°	537.9
42.5°	353.7
45°	234.0
47.5°	150.6
50°	100.9
52.5°	67.2
55°	47.1
57.5°	30.9
60°	20.2
62.5°	10.8
65°	4.0
67.5°	1.3
70°	1.3
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report





— 0°-180°







(END OF REPORT)