

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P756787

Luminaire Tested: LD4D95BD010-EU4DR7070959040-4LBDP1MW

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P756787
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-73)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D95BD010-EU4DR7070959040-4LBDP1MW
Description: 4 INCH ROUND DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 70° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7342.1 lumens
Efficiency: N/A
Efficacy: 74.0 lumens/watt
Spacing Criteria (0/90/45): 0.88 / 0.88 / 0.82
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 99.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P756787

CATALOG NUMBER: LD4D95BD010-EU4DR7070959040-4LBDP1MW

Luminous Intensity Polar Plot

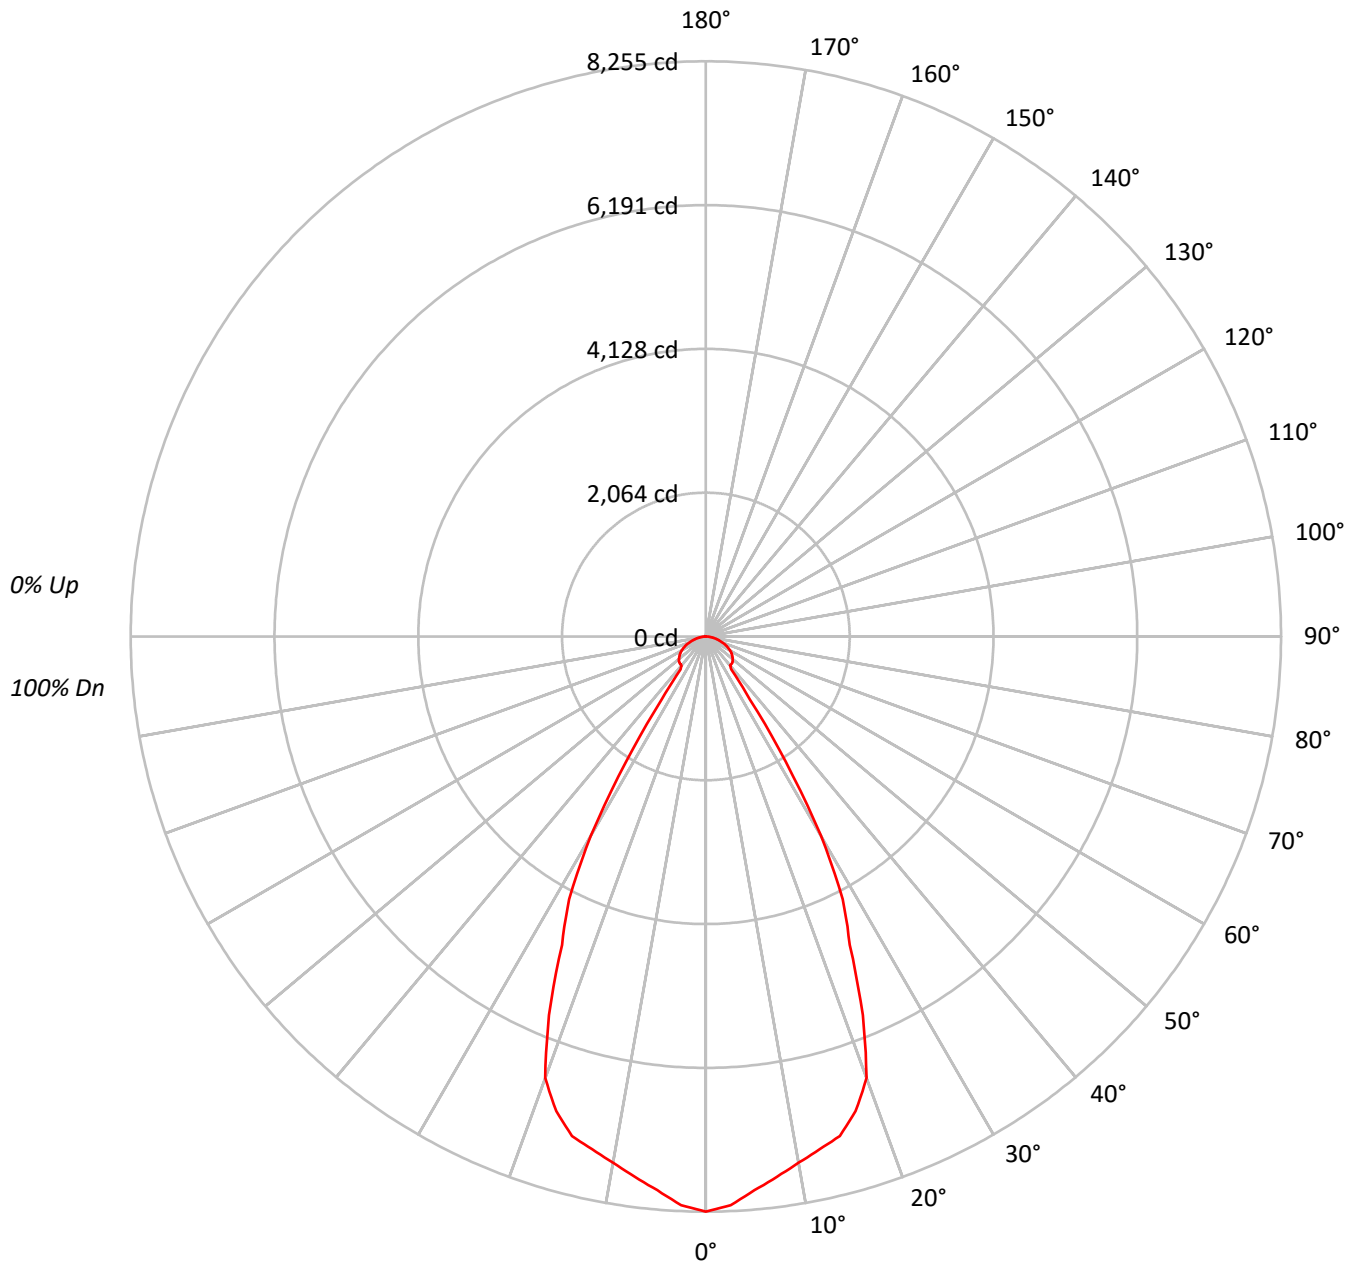



TEST NUMBER: P756787

CATALOG NUMBER: LD4D95BD010-EU4DR7070959040-4LBDP1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	112	109	106	103	110	107	104	102	103	101	99		99	97	96		95
2	106	100	95	91	103	98	94	90	95	91	88		92	89	86		89
3	100	92	87	82	98	91	86	81	88	84	80		86	82	79		83
4	94	86	80	75	92	85	79	74	82	77	73		80	76	73		78
5	89	80	74	69	87	79	73	69	77	72	68		75	71	67		74
6	85	75	68	64	83	74	68	64	73	67	63		71	66	63		70
7	80	70	64	59	79	70	64	59	68	63	59		67	62	59		66
8	77	66	60	56	75	66	60	56	65	59	55		64	59	55		63
9	73	63	57	52	72	62	56	52	61	56	52		60	55	52		60
10	70	59	53	49	69	59	53	49	58	53	49		57	52	49		57

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	901915
5°	875111
10°	850725
15°	839563
20°	783970
25°	588964
30°	416339
35°	147481
40°	77548
45°	82590
50°	85534
55°	87130
60°	87671
65°	85833
70°	80982
75°	75016
80°	66633
85°	54031

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 57.5°

Luminance: 87706 cd/sqm



TEST NUMBER: P756787

CATALOG NUMBER: LD4D95BD010-EU4DR7070959040-4LBDP1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	752.6	10.3
10°-20°	2064.3	28.1
20°-30°	2273.5	31.0
30°-40°	868.7	11.8
40°-50°	410.2	5.6
50°-60°	407.8	5.6
60°-70°	326.5	4.4
70°-80°	187.6	2.6
80°-90°	51.0	0.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	5090.4	69.3
0°-40°	5959.1	81.2
0°-60°	6777.0	92.3
0°-90°	7342.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	7342.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	8255	
5°	7979	753
15°	7422	2064
25°	4885	2274
35°	1106	869
45°	534	410
55°	457	408
65°	332	326
75°	178	188
85°	43	51
90°	0	



TEST NUMBER: P756787

CATALOG NUMBER: LD4D95BD010-EU4DR7070959040-4LBDP1MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	8254.7
2.5°	8168.4
5°	7978.9
7.5°	7820.8
10°	7667.9
12.5°	7538.5
15°	7422.2
17.5°	7141.2
20°	6742.5
22.5°	5882.6
25°	4885.4
27.5°	4252.8
30°	3300.0
32.5°	2131.6
35°	1105.7
37.5°	597.3
40°	543.7
42.5°	539.8
45°	534.5
47.5°	522.8
50°	503.2
52.5°	481.0
55°	457.4
57.5°	431.3
60°	401.2
62.5°	367.3
65°	332.0
67.5°	292.8
70°	253.5
72.5°	214.3
75°	177.7
77.5°	139.8
80°	105.9
82.5°	74.5
85°	43.1
87.5°	17.0
90°	0.0



Report Generated By 670245859 / DESKTOP-T8S5UU9





— 0°-180°







(END OF REPORT)