

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P756719

Luminaire Tested: LD4D95BD010-EU4DR6570959050-4LBDP1B

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P756719
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-59)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D95BD010-EU4DR6570959050-4LBDP1B
Description: 4 INCH ROUND DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 65° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 5000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6121.6 lumens
Efficiency: N/A
Efficacy: 61.7 lumens/watt
Spacing Criteria (0/90/45): 0.98 / 0.98 / 0.92
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 99.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P756719

CATALOG NUMBER: LD4D95BD010-EU4DR6570959050-4LBDP1B

Luminous Intensity Polar Plot

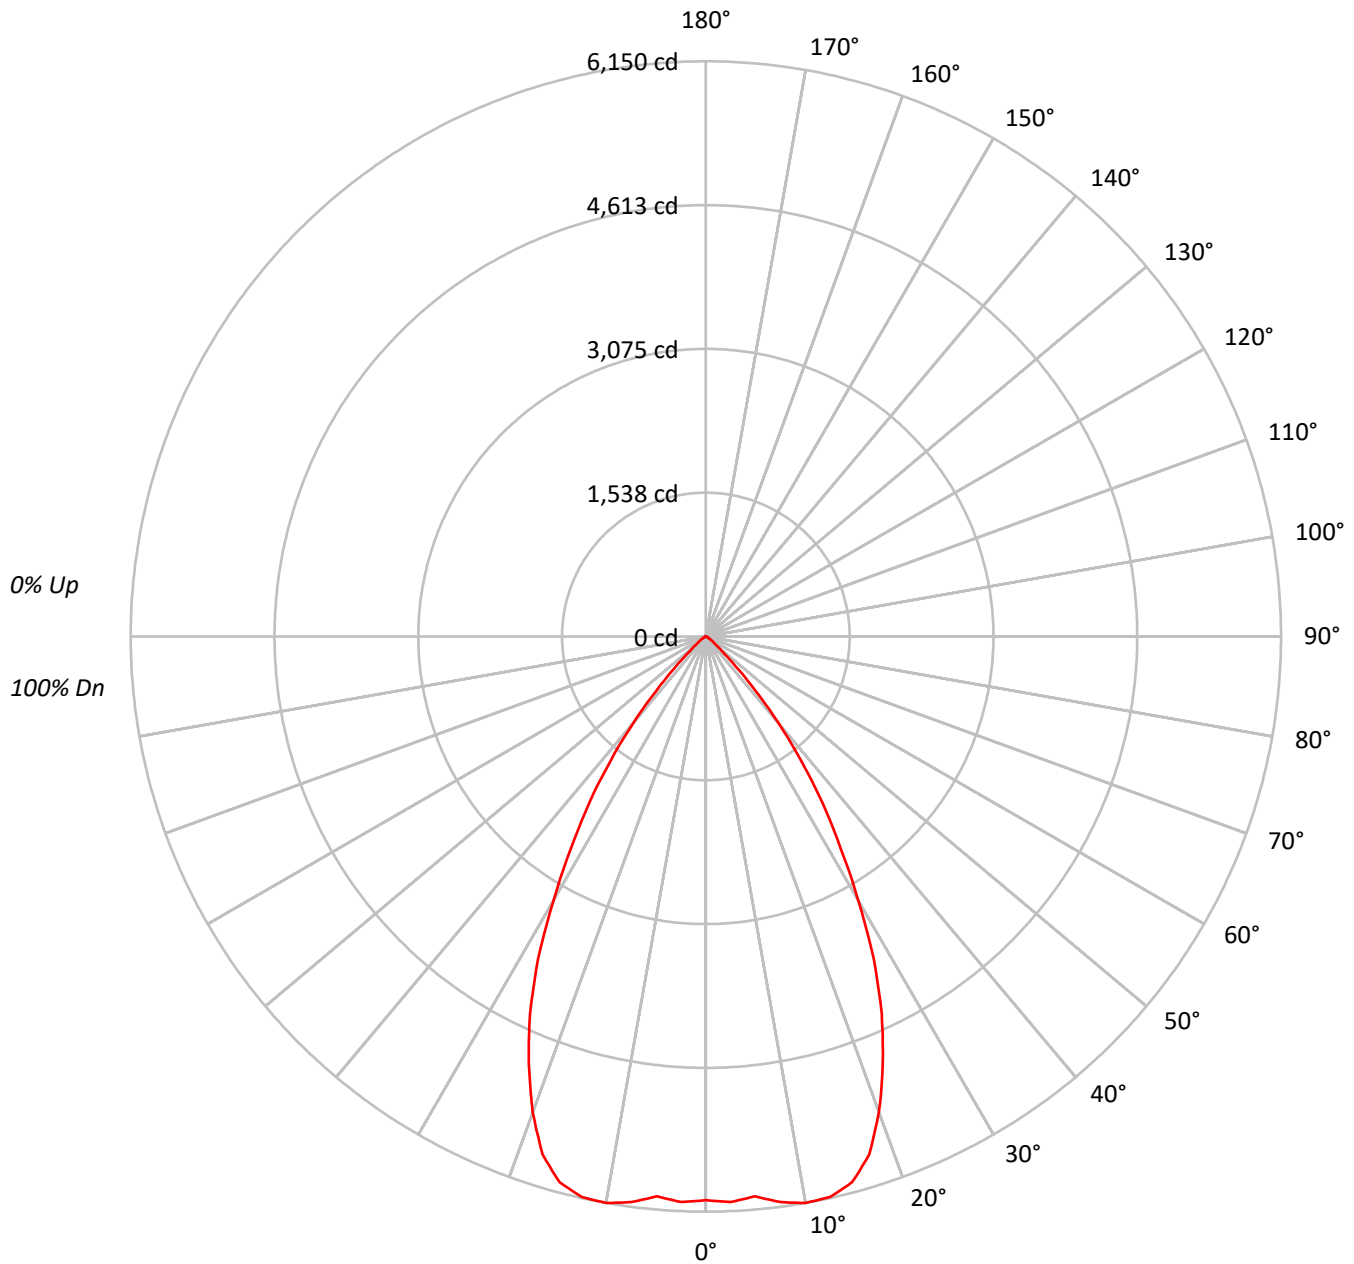



TEST NUMBER: P756719

CATALOG NUMBER: LD4D95BD010-EU4DR6570959050-4LBDP1B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	111	108	106	111	108	106	104	104	103	101		101	99	98		97
2	108	103	99	95	106	101	97	94	98	95	92		95	92	90		92
3	102	96	91	87	100	94	90	86	92	88	85		89	86	83		87
4	97	89	84	79	95	88	83	79	86	82	78		84	80	77		82
5	92	83	78	73	90	83	77	73	81	76	72		79	75	72		77
6	87	78	72	68	86	77	72	68	76	71	67		74	70	67		73
7	83	73	67	63	81	73	67	63	71	66	62		70	66	62		69
8	79	69	63	59	77	68	63	59	67	62	58		66	62	58		65
9	75	65	59	55	74	65	59	55	64	58	55		63	58	55		62
10	71	61	56	52	70	61	55	52	60	55	51		59	55	51		59

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	658525
5°	659067
10°	682275
15°	683407
20°	629187
25°	536100
30°	410397
35°	289947
40°	171141
45°	69487
50°	25191
55°	14039
60°	8042
65°	4421
70°	4664
75°	3630
80°	3775
85°	3259

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 69487 cd/sqm



TEST NUMBER: P756719

CATALOG NUMBER: LD4D95BD010-EU4DR6570959050-4LBDP1B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	580.4	9.5
10°-20°	1674.1	27.3
20°-30°	2008.6	32.8
30°-40°	1349.8	22.0
40°-50°	404.1	6.6
50°-60°	71.3	1.2
60°-70°	20.3	0.3
70°-80°	9.9	0.2
80°-90°	3.2	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4263.0	69.6
0°-40°	5612.8	91.7
0°-60°	6088.2	99.5
0°-90°	6121.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6121.6	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	6027	
5°	6009	580
15°	6042	1674
25°	4447	2009
35°	2174	1350
45°	450	404
55°	74	71
65°	17	20
75°	9	10
85°	3	3
90°	0	



TEST NUMBER: P756719

CATALOG NUMBER: LD4D95BD010-EU4DR6570959050-4LBDP1B

CANDELA DISTRIBUTION (FULL):

	0°
0°	6027.1
2.5°	6052.8
5°	6009.1
7.5°	6099.9
10°	6149.6
12.5°	6137.6
15°	6041.7
17.5°	5807.0
20°	5411.3
22.5°	4945.4
25°	4446.9
27.5°	3884.2
30°	3252.9
32.5°	2680.8
35°	2173.8
37.5°	1672.7
40°	1199.9
42.5°	783.7
45°	449.7
47.5°	238.1
50°	148.2
52.5°	102.8
55°	73.7
57.5°	53.1
60°	36.8
62.5°	24.0
65°	17.1
67.5°	15.4
70°	14.6
72.5°	11.1
75°	8.6
77.5°	7.7
80°	6.0
82.5°	4.3
85°	2.6
87.5°	1.7
90°	0.0



Report Generated By 670245859 / DESKTOP-T8S5UU9





— 0°-180°







(END OF REPORT)