

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P743495

Luminaire Tested: LD4D15D010-EU4DR550215IC9024-4LBSQW1MW

Issue Date: 1/30/2024

Test Information

Test Method: LM-79-2019
Report Number: P743495
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-52)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/30/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D15D010-EU4DR550215IC9024-4LBSQW1MW
Description: 4 INCH SQAURE DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 55° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1091.6 lumens
Efficiency: N/A
Efficacy: 69.1 lumens/watt
Spacing Criteria (0/90/45): 0.89 / 0.89 / 0.87
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 15.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P743495

CATALOG NUMBER: LD4D15D010-EU4DR550215IC9024-4LBSQW1MW

Luminous Intensity Polar Plot

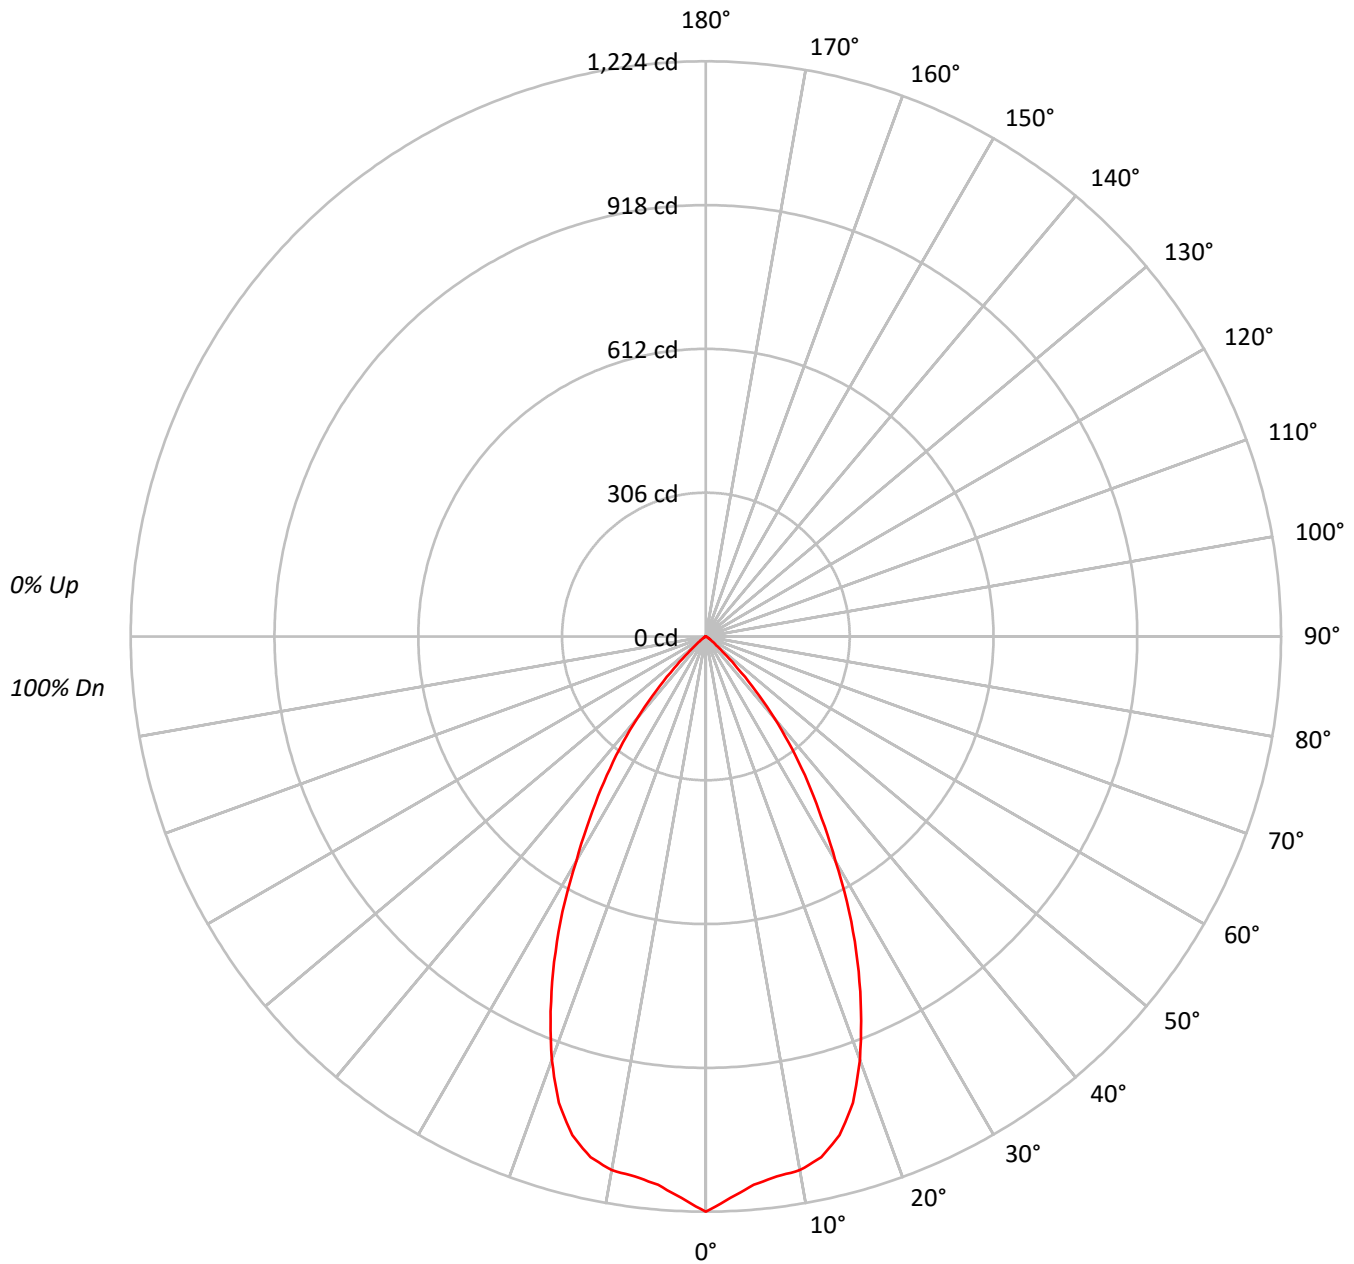



TEST NUMBER: P743495

CATALOG NUMBER: LD4D15D010-EU4DR550215IC9024-4LBSQW1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	111	108	106	111	109	106	104	105	103	101		101	99	98		97
2	108	103	99	96	106	101	98	95	98	95	92		95	93	90		92
3	102	96	91	87	100	95	90	86	92	88	85		90	86	84		87
4	97	90	84	80	95	88	83	79	86	82	78		84	81	78		82
5	92	84	78	74	91	83	77	73	81	76	73		79	75	72		78
6	88	79	73	68	86	78	72	68	76	71	68		75	70	67		74
7	83	74	68	64	82	73	67	63	72	67	63		71	66	63		70
8	79	69	63	59	78	69	63	59	68	63	59		67	62	59		66
9	75	66	60	56	74	65	59	55	64	59	55		63	58	55		62
10	72	62	56	52	71	61	56	52	61	56	52		60	55	52		59

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	133746
5°	128433
10°	127943
15°	124268
20°	111424
25°	92093
30°	69567
35°	50432
40°	32277
45°	14741
50°	4827
55°	2076
60°	896
65°	129
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 14741 cd/sqm



TEST NUMBER: P743495

CATALOG NUMBER: LD4D15D010-EU4DR550215IC9024-4LBSQW1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	111.4	10.2
10°-20°	304.1	27.9
20°-30°	346.6	31.7
30°-40°	235.9	21.6
40°-50°	81.3	7.4
50°-60°	11.2	1.0
60°-70°	1.1	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	762.1	69.8
0°-40°	998.0	91.4
0°-60°	1090.5	99.9
0°-90°	1091.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1091.6	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1224	
5°	1171	111
15°	1099	304
25°	764	347
35°	378	236
45°	95	81
55°	11	11
65°	0	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P743495

CATALOG NUMBER: LD4D15D010-EU4DR550215IC9024-4LBSQW1MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	1224.1
2.5°	1196.0
5°	1171.0
7.5°	1158.7
10°	1153.2
12.5°	1135.0
15°	1098.6
17.5°	1040.8
20°	958.3
22.5°	863.1
25°	763.9
27.5°	660.6
30°	551.4
32.5°	458.8
35°	378.1
37.5°	301.4
40°	226.3
42.5°	156.8
45°	95.4
47.5°	51.4
50°	28.4
52.5°	16.8
55°	10.9
57.5°	7.0
60°	4.1
62.5°	1.8
65°	0.5
67.5°	0.2
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-T8S5UU9





— 0°-180°







(END OF REPORT)