

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P749460

Luminaire Tested: LD4D50D010-EU4DR5040509040-4LBSQW1B

Issue Date: 1/30/2024

Test Information

Test Method: LM-79-2019
Report Number: P749460
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-44)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/30/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D50D010-EU4DR5040509040-4LBSQW1B
Description: 4 INCH SQAURE DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 50° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4633.2 lumens
Efficiency: N/A
Efficacy: 98.6 lumens/watt
Spacing Criteria (0/90/45): 0.8 / 0.8 / 0.73
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct


Input Watts (W): 47
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P749460

CATALOG NUMBER: LD4D50D010-EU4DR5040509040-4LBSQW1B

Luminous Intensity Polar Plot

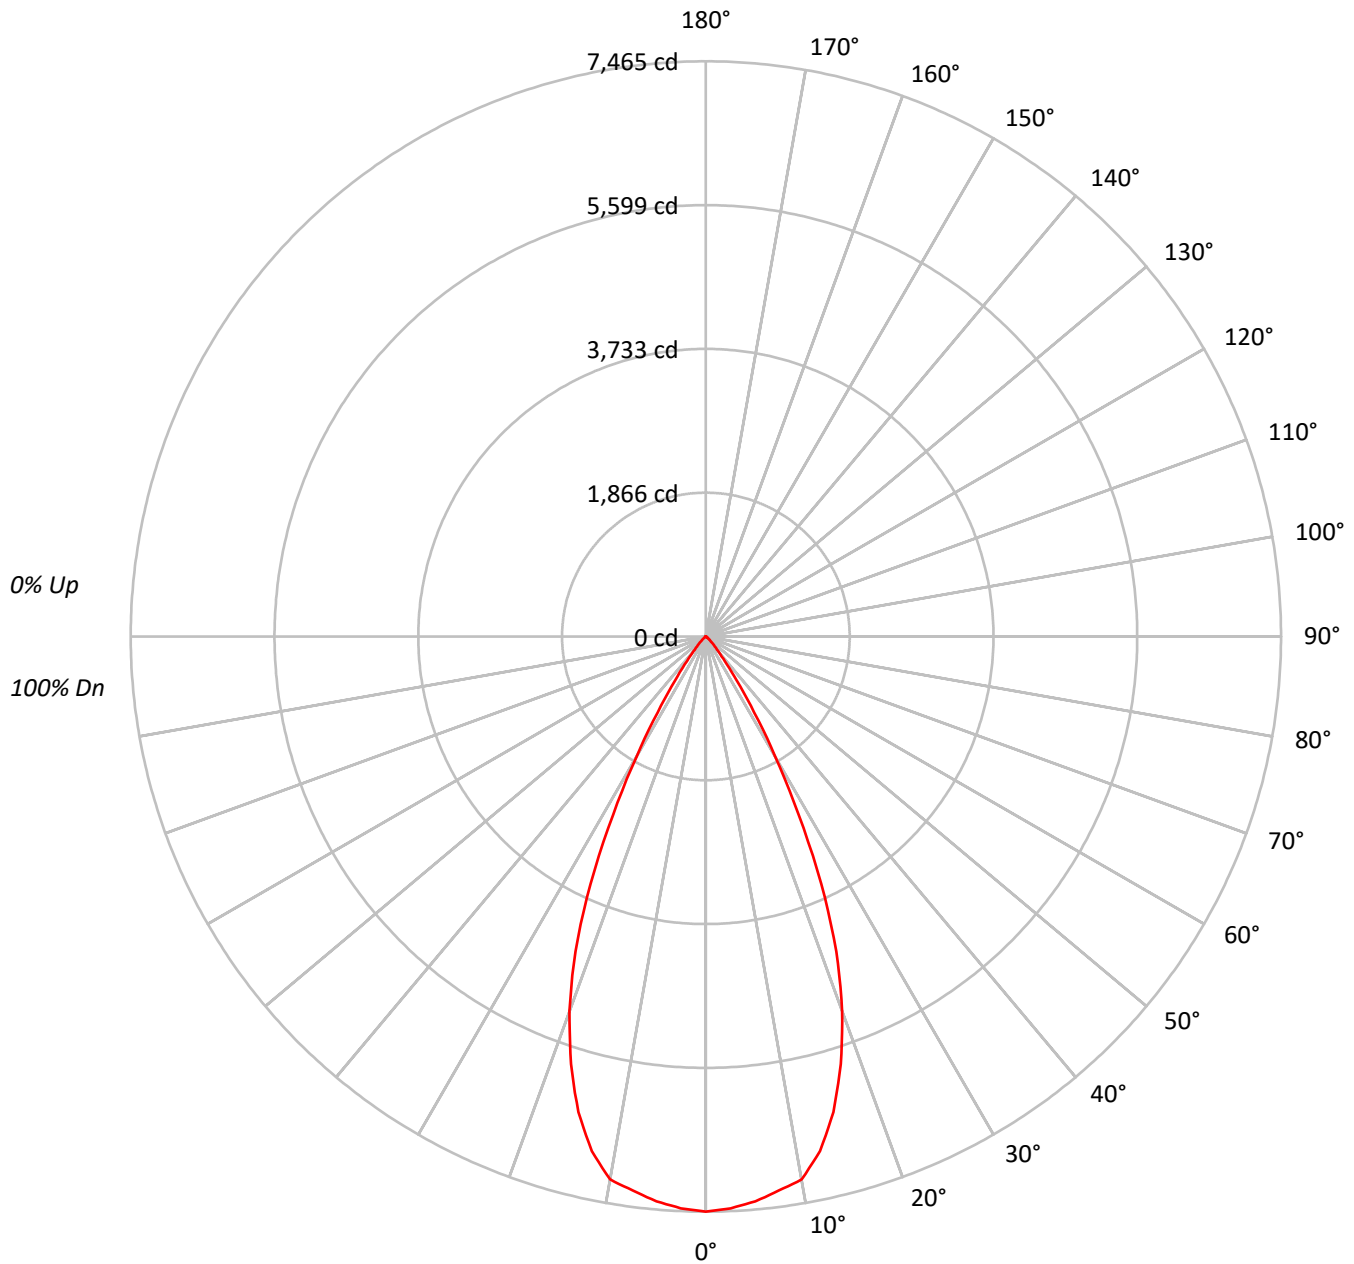



TEST NUMBER: P749460

CATALOG NUMBER: LD4D50D010-EU4DR5040509040-4LBSQW1B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	112	109	107	112	110	108	106	106	104	102		102	101	99		98
2	109	105	101	98	107	103	100	97	100	98	95		97	95	93		95
3	105	99	95	91	103	98	94	90	95	92	89		93	90	88		91
4	100	94	89	85	99	93	88	85	90	87	84		89	85	83		87
5	96	89	84	80	95	88	83	79	86	82	79		85	81	78		83
6	92	84	79	75	91	83	79	75	82	78	74		81	77	74		79
7	88	80	75	71	87	79	74	71	78	74	71		77	73	70		76
8	85	76	71	67	84	76	71	67	75	70	67		74	70	67		73
9	81	73	68	64	80	72	67	64	71	67	64		71	67	64		70
10	78	70	64	61	77	69	64	61	68	64	61		68	64	61		67

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	815664
5°	807110
10°	793821
15°	722839
20°	601480
25°	426961
30°	225997
35°	92101
40°	34203
45°	15653
50°	6425
55°	3353
60°	1661
65°	491
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 15653 cd/sqm



TEST NUMBER: P749460

CATALOG NUMBER: LD4D50D010-EU4DR5040509040-4LBSQW1B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	695.6	15.0
10°-20°	1757.8	37.9
20°-30°	1579.0	34.1
30°-40°	494.4	10.7
40°-50°	86.6	1.9
50°-60°	17.3	0.4
60°-70°	2.6	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4032.4	87.0
0°-40°	4526.8	97.7
0°-60°	4630.6	99.9
0°-90°	4633.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4633.2	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	7465	
5°	7359	696
15°	6390	1758
25°	3542	1579
35°	690	494
45°	101	87
55°	18	17
65°	2	3
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P749460

CATALOG NUMBER: LD4D50D010-EU4DR5040509040-4LBSQW1B

CANDELA DISTRIBUTION (FULL):

	0°
0°	7465.3
2.5°	7428.2
5°	7358.9
7.5°	7253.2
10°	7155.0
12.5°	6840.3
15°	6390.3
17.5°	5818.8
20°	5173.0
22.5°	4425.9
25°	3541.6
27.5°	2603.8
30°	1791.3
32.5°	1166.3
35°	690.5
37.5°	396.5
40°	239.8
42.5°	156.1
45°	101.3
47.5°	61.7
50°	37.8
52.5°	25.8
55°	17.6
57.5°	12.0
60°	7.6
62.5°	4.4
65°	1.9
67.5°	0.6
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-T8S5UU9





— 0°-180°







(END OF REPORT)