

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P252069

Luminaire Tested: **LD4B15D010 EU4B10209027 4LBBA1MB**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P252069
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1712-453-4)
Test Lab: INNOVATION CENTER(G1)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD4B15D010 EU4B10209027 4LBBA1MB
Description: PORTFOLIO 4 INCH BAFFLE RECESSED DOWNLIGHT, WITH MATTE BLACK TRIM
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 614.0 lumens
Efficiency: N/A
Efficacy: 42.7 lumens/watt
Spacing Criteria (0/90/45): 1.04 / 1.04 / 0.94
Luminous Opening: Circular (Dia: 0.38' x H: 0')
CIE Type: Direct


Input Watts (W): 14.39
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P252069

CATALOG NUMBER: LD4B15D010 EU4B10209027 4LBBA1MB

Luminous Intensity Polar Plot

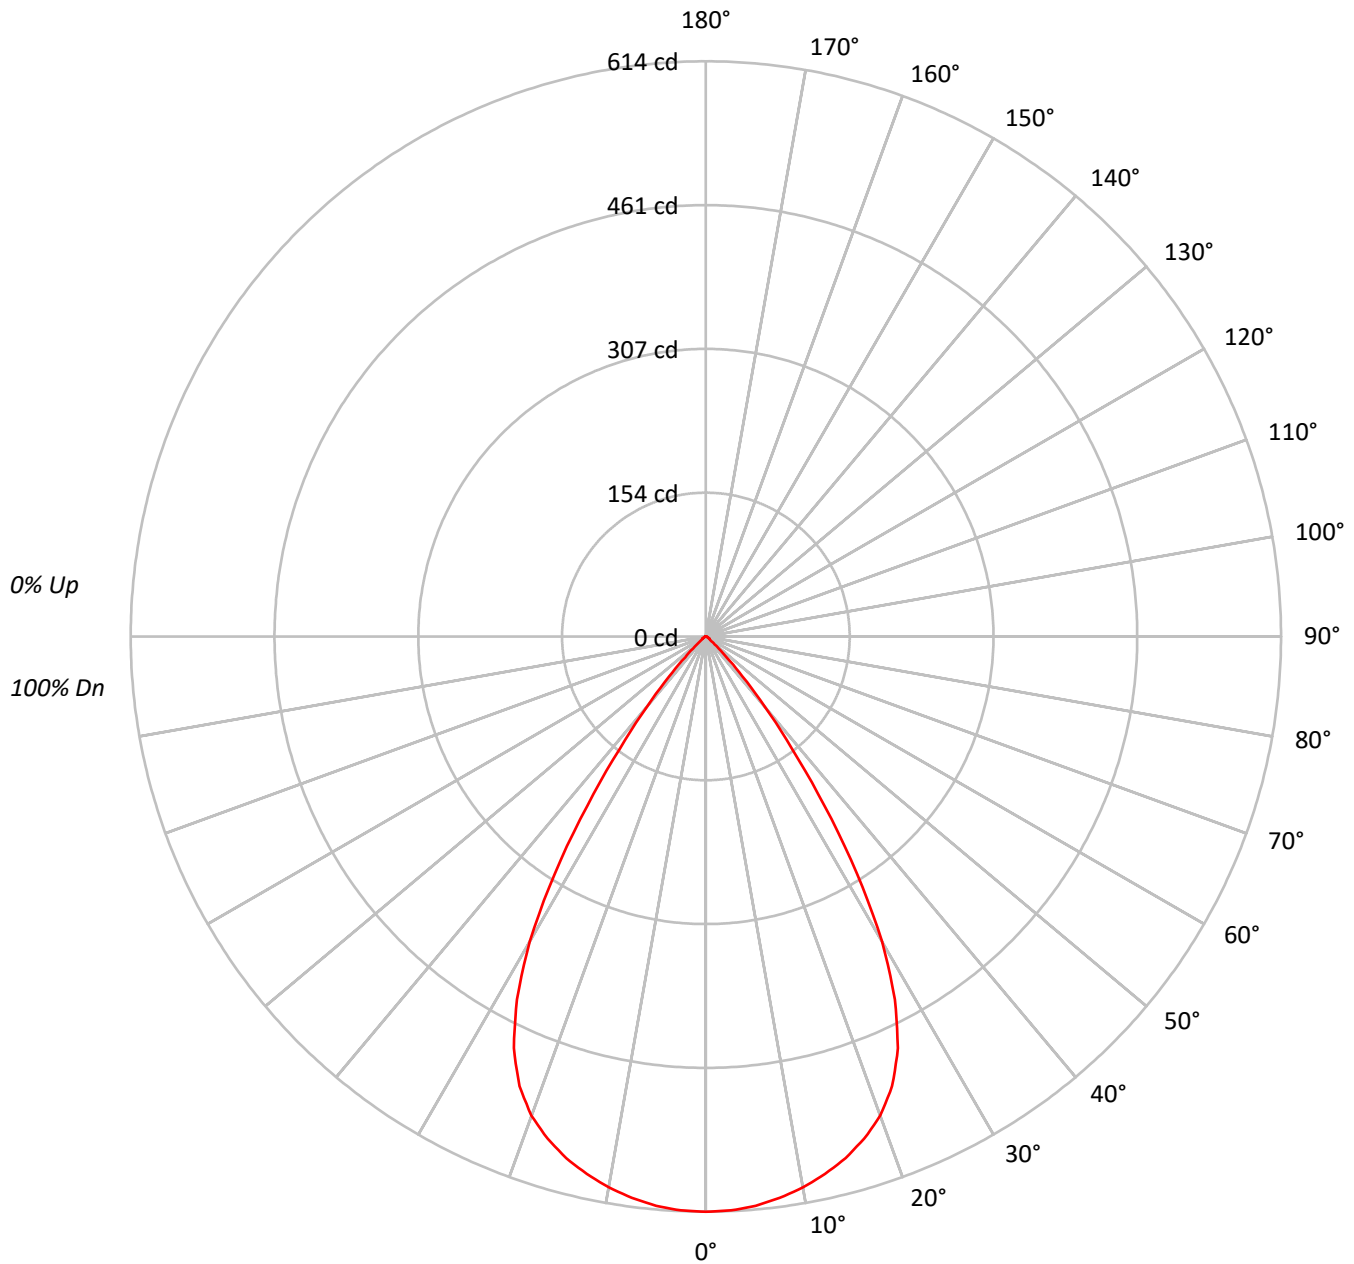



TEST NUMBER: P252069

CATALOG NUMBER: LD4B15D010 EU4B10209027 4LBBA1MB

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	111	108	106	111	109	106	104	105	103	101		101	99	98		97
2	108	103	99	96	106	101	98	94	98	95	92		95	93	90		92
3	102	96	91	87	100	95	90	86	92	88	85		90	86	84		87
4	97	90	84	80	95	88	83	79	86	82	78		84	81	77		82
5	92	84	78	74	91	83	77	73	81	76	73		79	75	72		78
6	88	79	73	68	86	78	72	68	76	71	68		75	70	67		74
7	83	74	68	63	82	73	67	63	72	67	63		71	66	63		69
8	79	69	63	59	78	69	63	59	68	63	59		67	62	59		66
9	75	65	59	55	74	65	59	55	64	59	55		63	58	55		62
10	72	62	56	52	71	61	56	52	60	55	52		60	55	52		59

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	59849
5°	59686
10°	59100
15°	58156
20°	56451
25°	52154
30°	42313
35°	26234
40°	12341
45°	4314
50°	1213
55°	816
60°	624
65°	553
70°	456
75°	301
80°	449
85°	0



TEST NUMBER: P252069

CATALOG NUMBER: LD4B15D010 EU4B10209027 4LBBA1MB

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	57.8	9.4
10°-20°	162.0	26.4
20°-30°	217.8	35.5
30°-40°	139.1	22.7
40°-50°	29.6	4.8
50°-60°	4.4	0.7
60°-70°	2.2	0.4
70°-80°	1.0	0.2
80°-90°	0.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	437.6	71.3
0°-40°	576.7	93.9
0°-60°	610.8	99.5
0°-90°	614.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	614.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	614	
5°	610	58
15°	576	162
25°	485	218
35°	220	139
45°	31	30
55°	5	4
65°	2	2
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P252069

CATALOG NUMBER: LD4B15D010 EU4B10209027 4LBBA1MB

CANDELA DISTRIBUTION (FULL):

	0°
0°	614.1
2.5°	613.3
5°	610.1
7.5°	604.4
10°	597.2
12.5°	587.6
15°	576.4
17.5°	562.0
20°	544.3
22.5°	519.5
25°	485.0
27.5°	436.9
30°	376.0
32.5°	300.6
35°	220.5
37.5°	150.7
40°	97.0
42.5°	57.7
45°	31.3
47.5°	16.0
50°	8.0
52.5°	5.6
55°	4.8
57.5°	4.0
60°	3.2
62.5°	2.4
65°	2.4
67.5°	1.6
70°	1.6
72.5°	0.8
75°	0.8
77.5°	0.8
80°	0.8
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)