

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P208167

Luminaire Tested: **LD4B15D010 EU4B10208030 4LBMLI1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P208167
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD4B15D010 EU4B10208030 4LBMLI1
Description: PORTFOLIO 4 INCH 50 DEGREE CUTOFF RECESSED DOWNLIGHT
MEDIUM DISTRIBUTION WITH SPECULAR CLEAR TRIM
WATTAGE D010TR-14.39W DE010-14.29W D5LT-14.34W DMX-14.46W DL2-15.8W
DL3-15.28W DLE-15.432W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1402.4 lumens
Efficiency: N/A
Efficacy: 98.1 lumens/watt
Spacing Criteria (0/90/45): 0.7 / 0.7 / 0.76
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 14.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P208167

CATALOG NUMBER: LD4B15D010 EU4B10208030 4LBMLI1

Luminous Intensity Polar Plot

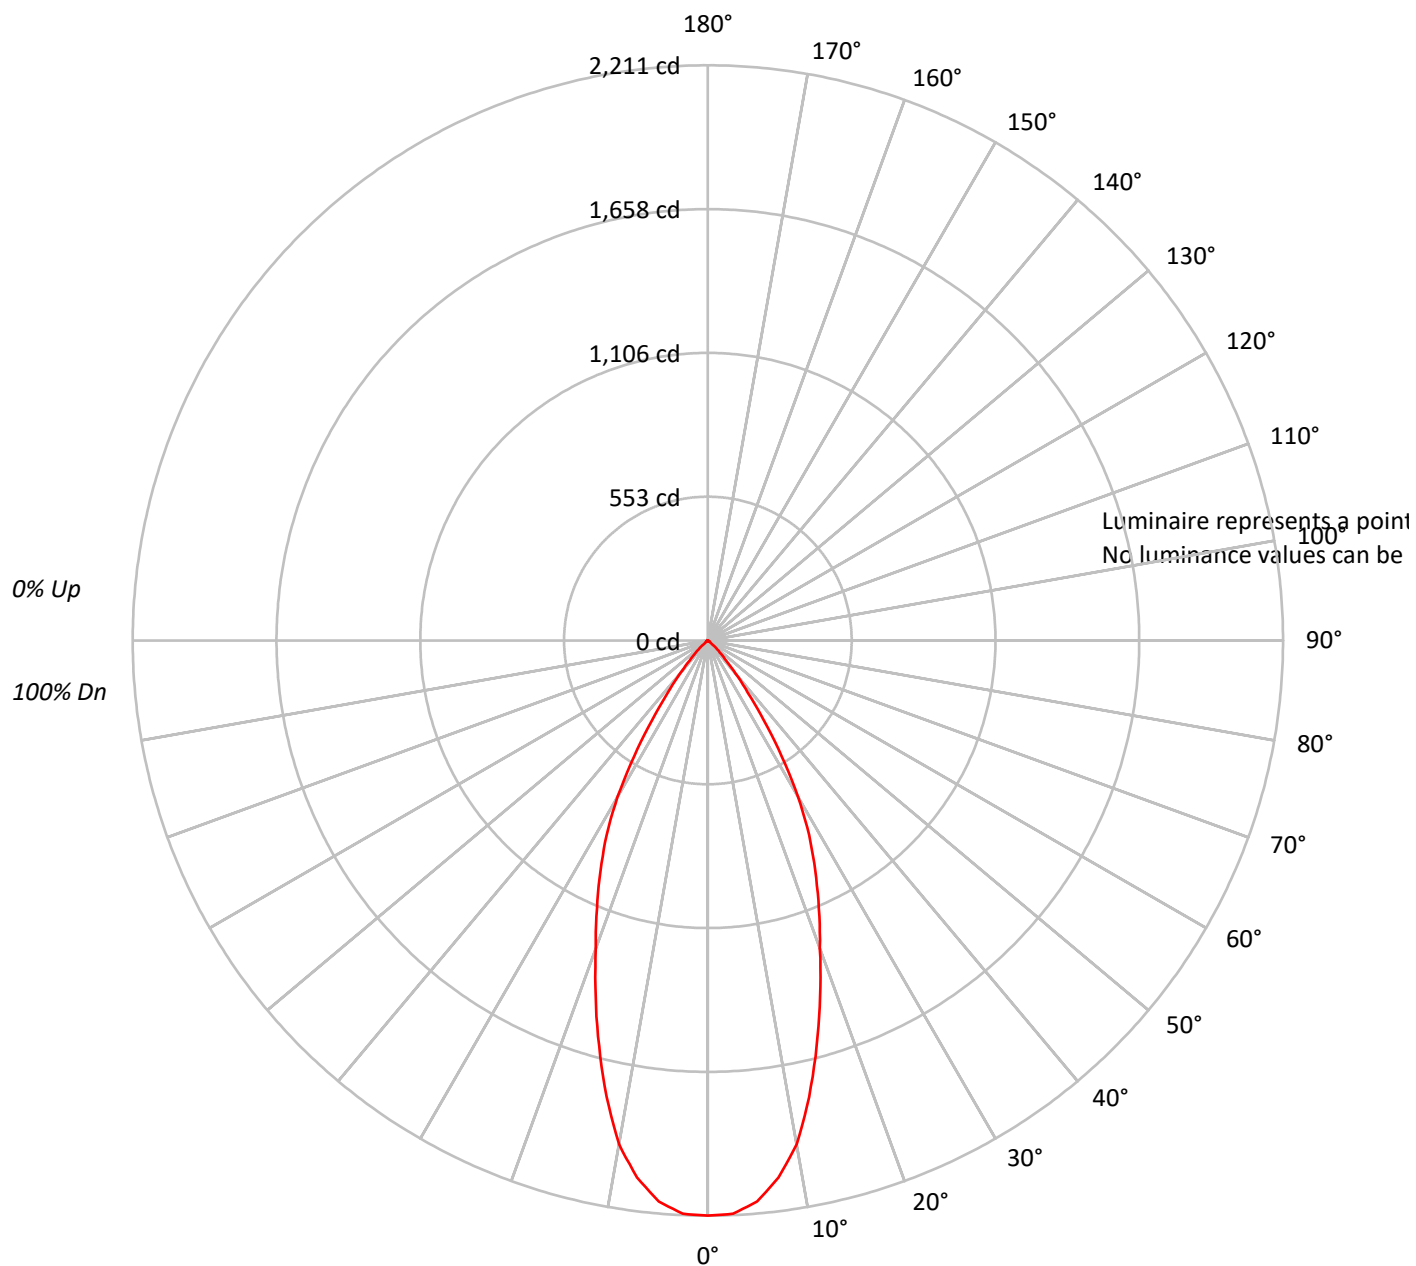



TEST NUMBER: P208167

CATALOG NUMBER: LD4B15D010 EU4B10208030 4LBMLI1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10		50	30	10			50	30	10			50
RCR																				
0	119	119	119	119	116	116	116	116		111	111	111			106	106	106			102
1	114	111	109	107	111	109	107	105		105	103	102			101	100	99			98
2	109	104	100	97	107	102	99	96		99	96	94			96	94	92			94
3	104	98	93	89	102	96	92	89		94	90	87			91	88	86			89
4	99	92	87	83	97	91	86	82		89	85	81			87	83	80			85
5	94	87	81	77	93	86	81	77		84	79	76			82	78	75			81
6	90	82	76	72	89	81	76	72		80	75	71			78	74	71			77
7	86	77	72	68	85	77	71	68		75	71	67			74	70	67			73
8	82	73	68	64	81	73	67	64		72	67	64			71	66	63			70
9	79	70	64	60	78	69	64	60		68	63	60			67	63	60			67
10	75	66	61	57	74	66	61	57		65	60	57			64	60	57			64

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P208167

CATALOG NUMBER: LD4B15D010 EU4B10208030 4LBMLI1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	200.2	14.3
10°-20°	447.5	31.9
20°-30°	444.9	31.7
30°-40°	242.3	17.3
40°-50°	56.0	4.0
50°-60°	7.9	0.6
60°-70°	2.9	0.2
70°-80°	0.7	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1092.6	77.9
0°-40°	1334.9	95.2
0°-60°	1398.8	99.7
0°-90°	1402.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1402.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2211	
5°	2165	200
15°	1615	448
25°	976	445
35°	375	242
45°	64	56
55°	8	8
65°	3	3
75°	0	1
85°	0	0
90°	0	



TEST NUMBER: P208167

CATALOG NUMBER: LD4B15D010 EU4B10208030 4LBMLI1

CANDELA DISTRIBUTION (FULL):

	0°
0°	2210.8
2.5°	2205.7
5°	2165.0
7.5°	2081.9
10°	1966.5
12.5°	1796.8
15°	1615.3
17.5°	1435.4
20°	1259.0
22.5°	1114.7
25°	975.6
27.5°	843.3
30°	694.0
32.5°	527.7
35°	375.0
37.5°	252.8
40°	164.6
42.5°	103.5
45°	64.5
47.5°	37.3
50°	18.7
52.5°	10.2
55°	8.5
57.5°	5.1
60°	5.1
62.5°	3.4
65°	3.4
67.5°	1.7
70°	1.7
72.5°	1.7
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)