

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P205899

Luminaire Tested: **LD4B15D010 EU4B10208030 4LBSGPH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P205899
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD4B15D010 EU4B10208030 4LBSGPH1
Description: PORTFOLIO 4 INCH SHALLOW RECESSED DOWNLIGHT
SHALLOW DISTRIBUTION WITH GRAPHITE HAZE TRIM
WATTAGE D010TR-14.39W DE010-14.29W D5LT-14.34W DMX-14.46W DL2-15.8W
DL3-15.28W DLE-15.432W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1347.1 lumens
Efficiency: N/A
Efficacy: 94.2 lumens/watt
Spacing Criteria (0/90/45): 1.16 / 1.16 / 1.26
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 14.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P205899

CATALOG NUMBER: LD4B15D010 EU4B10208030 4LBSGPH1

Luminous Intensity Polar Plot

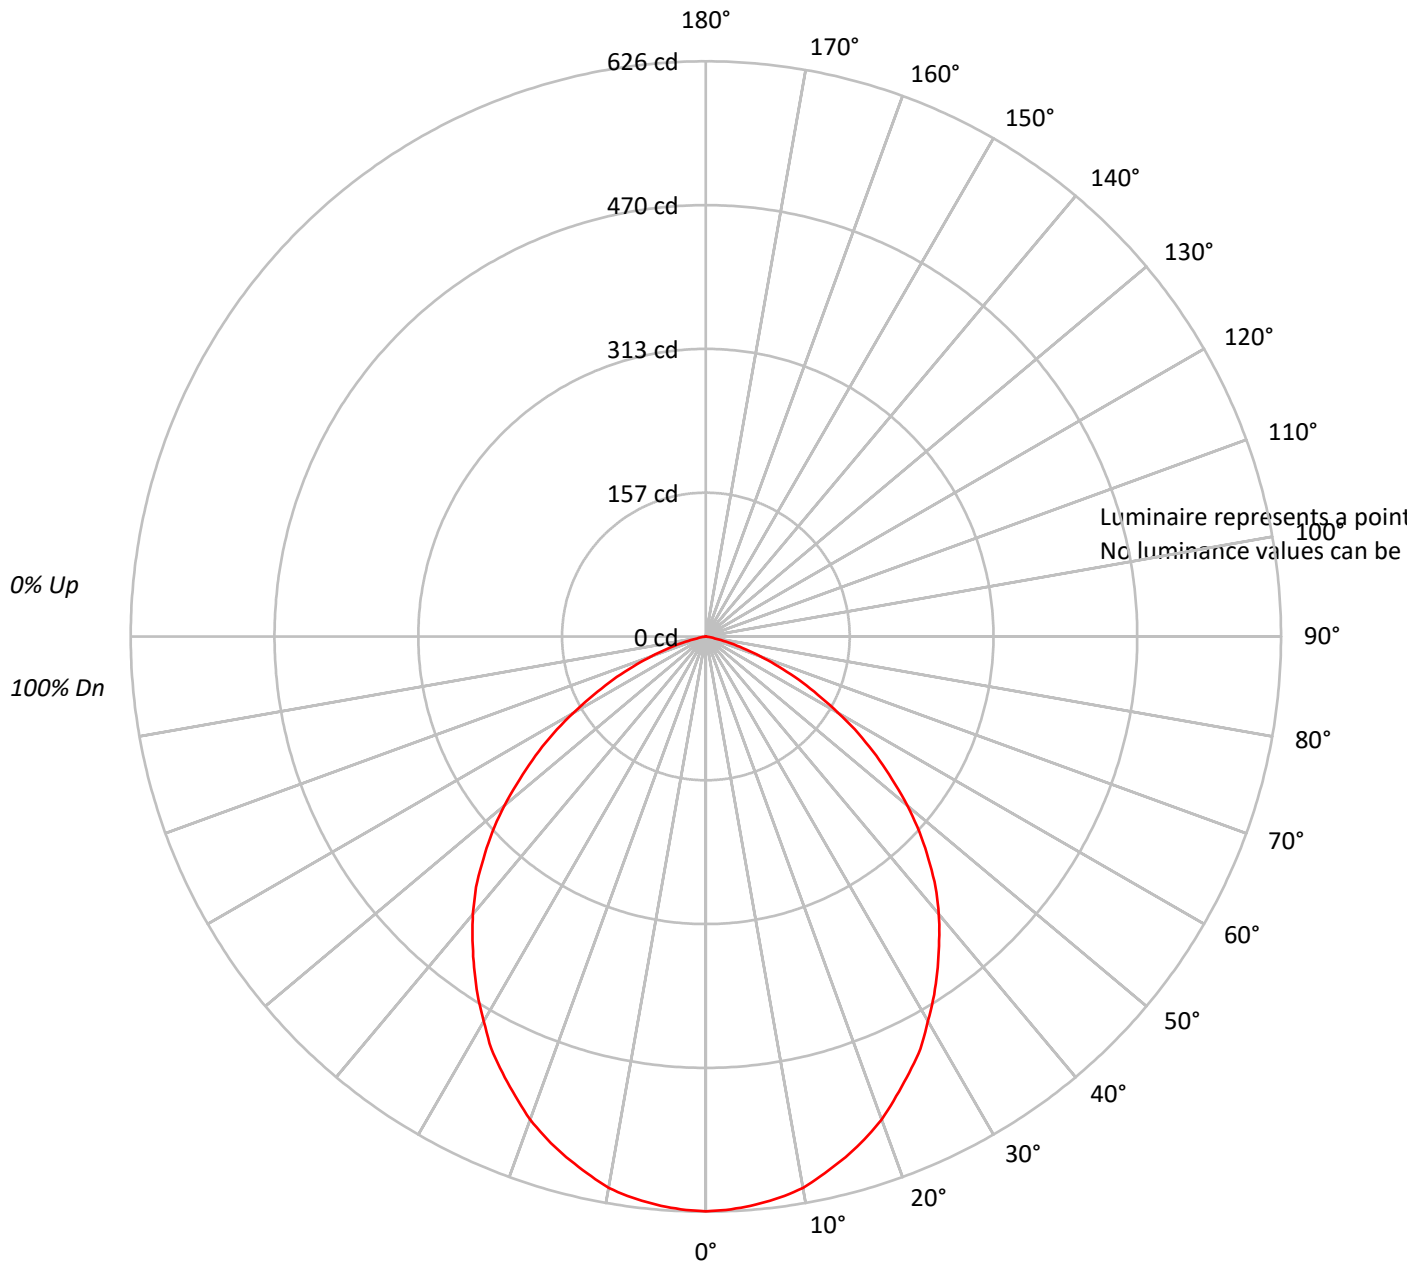




TEST NUMBER: P205899

CATALOG NUMBER: LD4B15D010 EU4B10208030 4LBSGPH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	111	107	103	100	108	105	102	99	101	98	96	97	95	93	93	91	90	88		
2	102	95	89	84	100	93	88	83	90	85	82	87	83	80	84	81	78	76		
3	94	85	78	72	92	83	77	71	80	75	70	78	73	69	75	71	68	66		
4	87	76	68	62	85	75	67	62	72	66	61	70	65	60	68	63	59	57		
5	80	68	60	54	78	67	60	54	65	59	53	63	58	53	62	56	52	50		
6	74	62	54	48	73	61	53	48	59	52	47	58	52	47	56	51	47	45		
7	69	57	48	43	68	56	48	43	54	47	42	53	47	42	52	46	42	40		
8	65	52	44	38	63	51	44	38	50	43	38	49	42	38	48	42	38	36		
9	60	48	40	35	59	47	40	35	46	39	35	45	39	34	44	38	34	32		
10	57	44	37	32	56	44	36	32	43	36	31	42	36	31	41	35	31	30		

AVERAGE LUMINANCE (cd/sqm):

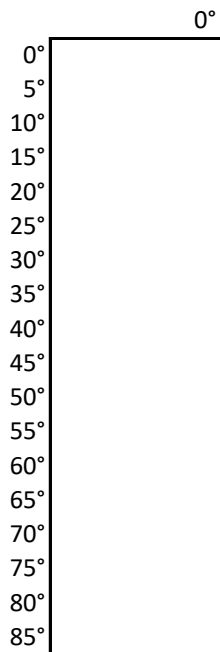



TEST NUMBER: P205899

CATALOG NUMBER: LD4B15D010 EU4B10208030 4LBSGPH1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	58.9	4.4
10°-20°	165.4	12.3
20°-30°	241.2	17.9
30°-40°	275.0	20.4
40°-50°	263.8	19.6
50°-60°	202.0	15.0
60°-70°	110.9	8.2
70°-80°	29.5	2.2
80°-90°	0.4	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	465.4	34.6
0°-40°	740.5	55.0
0°-60°	1206.3	89.5
0°-90°	1347.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1347.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	626	
5°	621	59
15°	587	165
25°	524	241
35°	440	275
45°	343	264
55°	226	202
65°	112	111
75°	26	29
85°	0	0
90°	0	



TEST NUMBER: P205899

CATALOG NUMBER: LD4B15D010 EU4B10208030 4LBSGPH1

CANDELA DISTRIBUTION (FULL):

0°	
0°	625.7
2.5°	624.1
5°	620.8
7.5°	616.0
10°	609.5
12.5°	598.2
15°	586.9
17.5°	573.9
20°	559.4
22.5°	541.6
25°	523.8
27.5°	506.0
30°	483.4
32.5°	462.4
35°	439.8
37.5°	417.1
40°	394.5
42.5°	370.2
45°	342.7
47.5°	315.3
50°	286.2
52.5°	255.4
55°	226.3
57.5°	197.2
60°	166.5
62.5°	137.4
65°	111.6
67.5°	85.7
70°	63.1
72.5°	42.0
75°	25.9
77.5°	11.3
80°	3.2
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)