

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P205795

Luminaire Tested: **LD4B15D010 EU4B10208030 4LBSWH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P205795
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD4B15D010 EU4B10208030 4LBSWH1
Description: PORTFOLIO 4 INCH SHALLOW RECESSED DOWNLIGHT
SHALLOW DISTRIBUTION WITH WHEAT TRIM
WATTAGE D010TR-14.39W DE010-14.29W D5LT-14.34W DMX-14.46W DL2-15.8W
DL3-15.28W DLE-15.432W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1476.3 lumens
Efficiency: N/A
Efficacy: 103.2 lumens/watt
Spacing Criteria (0/90/45): 0.94 / 0.94 / 1.08
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 14.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P205795

CATALOG NUMBER: LD4B15D010 EU4B10208030 4LBSWH1

Luminous Intensity Polar Plot

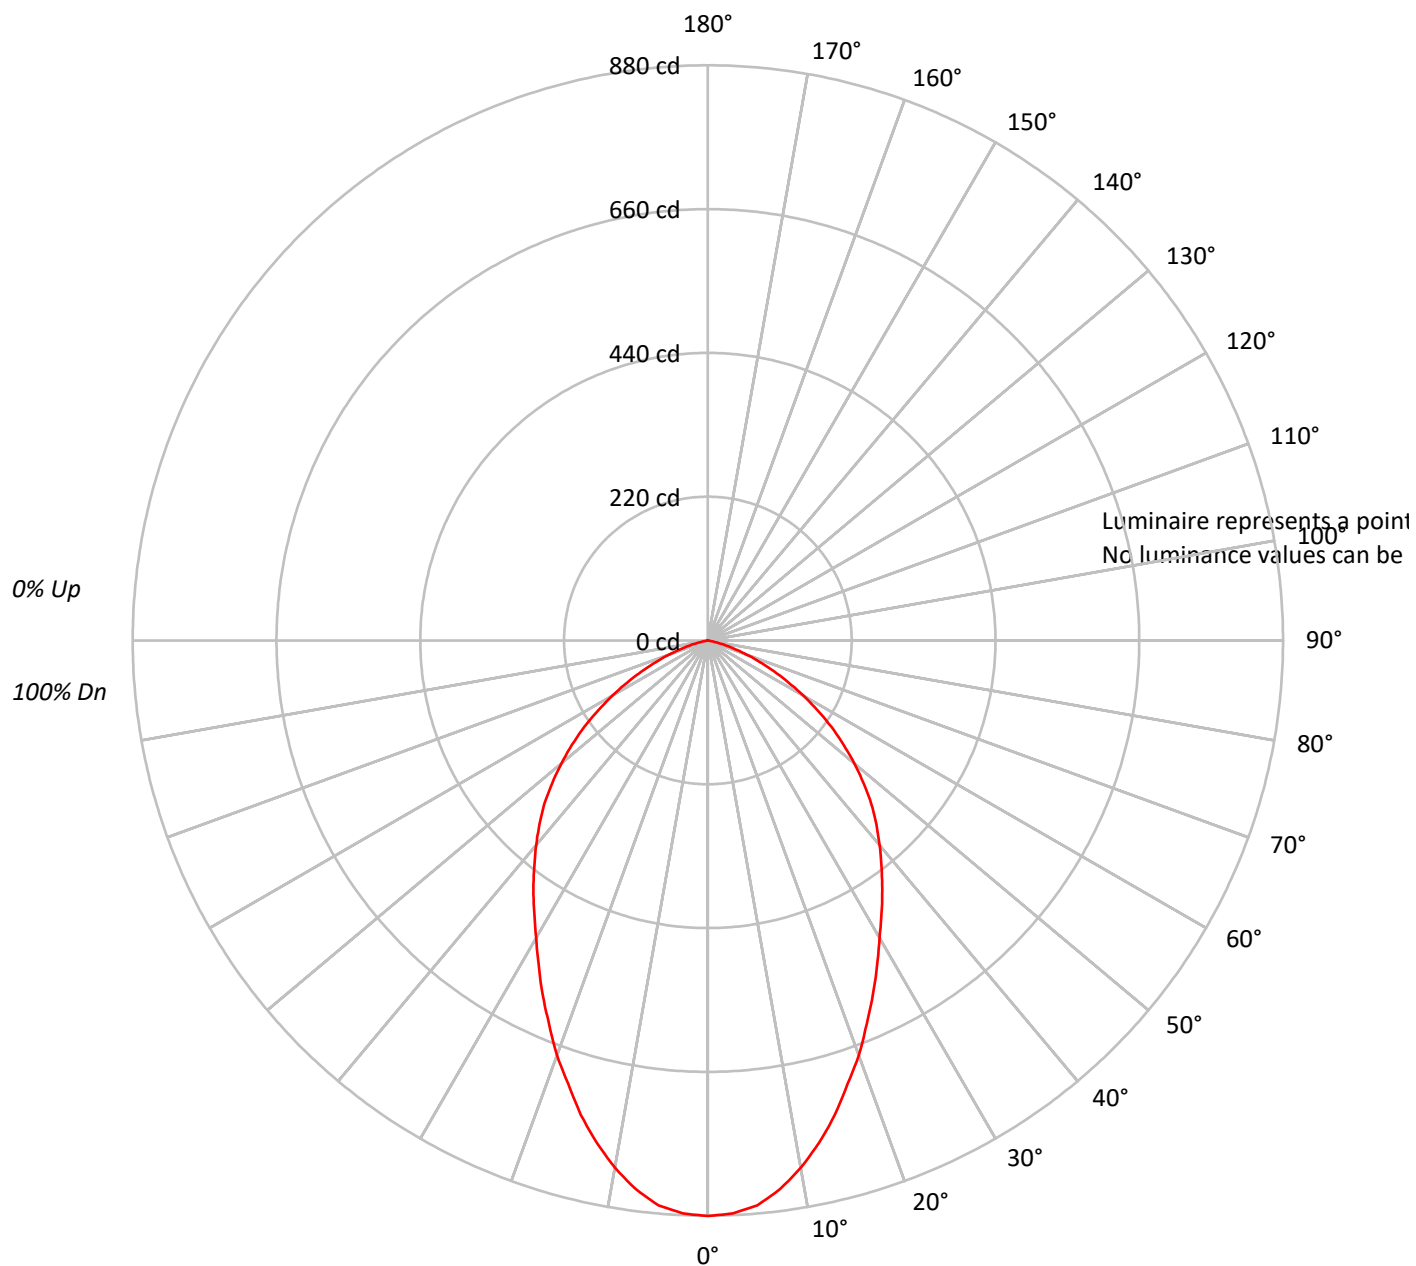



TEST NUMBER: P205795

CATALOG NUMBER: LD4B15D010 EU4B10208030 4LBSWH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	111	107	104	101	108	105	102	99	101	98	96	97	95	93	94	92	90	89		
2	103	96	90	85	100	94	89	85	91	86	83	87	84	81	85	82	79	77		
3	95	86	79	73	93	84	78	73	82	76	72	79	74	70	76	73	69	67		
4	88	77	70	64	86	76	69	63	74	68	63	72	66	62	69	65	61	59		
5	81	70	62	56	79	69	62	56	67	60	55	65	59	55	63	58	54	52		
6	76	64	56	50	74	63	55	50	61	54	49	60	54	49	58	53	49	47		
7	71	58	51	45	69	58	50	45	56	49	45	55	49	44	54	48	44	42		
8	66	54	46	41	65	53	46	41	52	45	40	51	45	40	50	44	40	38		
9	62	50	42	37	61	49	42	37	48	41	37	47	41	37	46	41	37	35		
10	58	46	39	34	57	46	39	34	45	38	34	44	38	34	43	38	34	32		

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P205795

CATALOG NUMBER: LD4B15D010 EU4B10208030 4LBSWH1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	81.2	5.5
10°-20°	210.2	14.2
20°-30°	274.9	18.6
30°-40°	291.1	19.7
40°-50°	271.5	18.4
50°-60°	205.6	13.9
60°-70°	111.4	7.5
70°-80°	29.9	2.0
80°-90°	0.4	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	566.4	38.4
0°-40°	857.5	58.1
0°-60°	1334.6	90.4
0°-90°	1476.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1476.3	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	880	
5°	868	81
15°	751	210
25°	598	275
35°	465	291
45°	354	272
55°	231	206
65°	112	111
75°	26	30
85°	0	0
90°	0	



TEST NUMBER: P205795

CATALOG NUMBER: LD4B15D010 EU4B10208030 4LBSWH1

CANDELA DISTRIBUTION (FULL):

0°	
0°	880.5
2.5°	877.3
5°	867.6
7.5°	846.6
10°	819.1
12.5°	786.8
15°	751.2
17.5°	710.9
20°	675.3
22.5°	634.9
25°	597.8
27.5°	560.6
30°	525.1
32.5°	494.4
35°	465.3
37.5°	436.2
40°	408.7
42.5°	381.3
45°	353.8
47.5°	323.1
50°	292.4
52.5°	261.7
55°	231.0
57.5°	198.7
60°	168.0
62.5°	138.9
65°	111.5
67.5°	85.6
70°	63.0
72.5°	43.6
75°	25.8
77.5°	11.3
80°	3.2
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)