

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P207259

Luminaire Tested: **LD4B20D010 EU4B10209024 4LBMWH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P207259
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD4B20D010 EU4B10209024 4LBMWH1
Description: PORTFOLIO 4 INCH 50 DEGREE CUTOFF RECESSED DOWNLIGHT
MEDIUM DISTRIBUTION WITH WHEAT TRIM
WATTAGE D010TR-21.86W DE010-20.46W D5LT-21.24W DMX-20.89W DL2-22.5W
DL3-21.8 6W DLE-22.46W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1123.5 lumens
Efficiency: N/A
Efficacy: 54.0 lumens/watt
Spacing Criteria (0/90/45): 0.88 / 0.88 / 0.87
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 20.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P207259

CATALOG NUMBER: LD4B20D010 EU4B10209024 4LBMWH1

Luminous Intensity Polar Plot

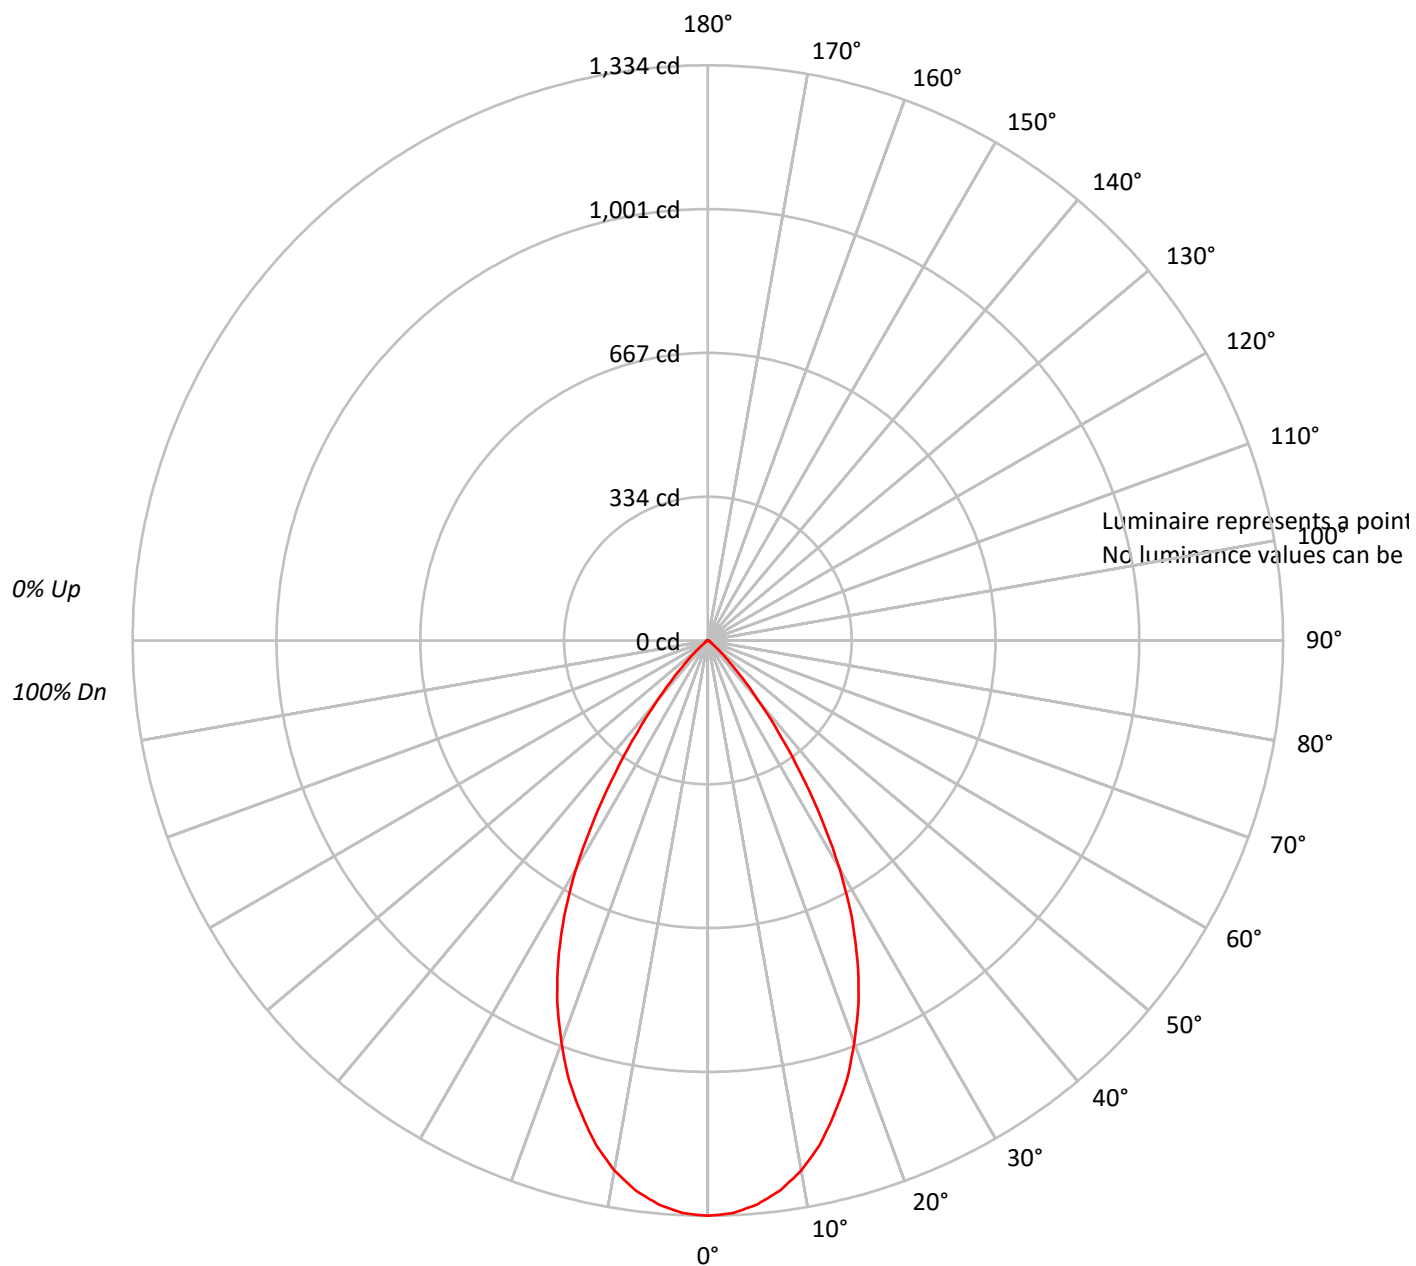




TEST NUMBER: P207259

CATALOG NUMBER: LD4B20D010 EU4B10209024 4LBMWH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	111	108	106	111	109	106	105	105	103	101		101	100	98		98
2	108	103	99	96	106	102	98	95	98	95	93		95	93	91		93
3	103	96	91	88	101	95	90	87	92	89	85		90	87	84		88
4	98	90	85	81	96	89	84	80	87	83	79		85	81	78		83
5	93	84	79	74	91	84	78	74	82	77	73		80	76	73		79
6	88	79	73	69	87	79	73	69	77	72	68		76	71	68		74
7	84	75	69	65	82	74	68	64	73	68	64		72	67	64		70
8	80	70	64	60	79	70	64	60	69	64	60		68	63	60		67
9	76	66	61	57	75	66	60	57	65	60	56		64	60	56		63
10	73	63	57	53	72	62	57	53	62	57	53		61	56	53		60

AVERAGE LUMINANCE (cd/sqm):

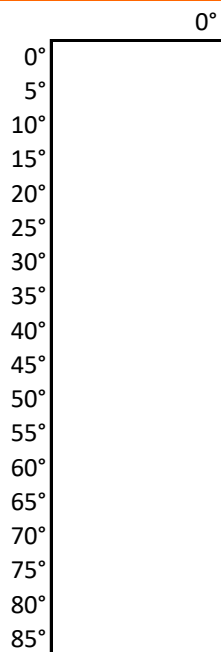



TEST NUMBER: P207259

CATALOG NUMBER: LD4B20D010 EU4B10209024 4LBMWH1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	123.3	11.0
10°-20°	316.9	28.2
20°-30°	371.8	33.1
30°-40°	235.3	20.9
40°-50°	63.0	5.6
50°-60°	8.8	0.8
60°-70°	3.3	0.3
70°-80°	1.1	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	812.0	72.3
0°-40°	1047.3	93.2
0°-60°	1119.2	99.6
0°-90°	1123.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1123.5	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1334	
5°	1313	123
15°	1135	317
25°	822	372
35°	373	235
45°	71	63
55°	8	9
65°	3	3
75°	2	1
85°	0	0
90°	0	



TEST NUMBER: P207259

CATALOG NUMBER: LD4B20D010 EU4B10209024 4LBMWH1

CANDELA DISTRIBUTION (FULL):

0°	
0°	1334.3
2.5°	1329.4
5°	1312.8
7.5°	1286.2
10°	1248.0
12.5°	1198.2
15°	1135.2
17.5°	1070.5
20°	992.5
22.5°	912.8
25°	821.5
27.5°	721.9
30°	610.7
32.5°	489.6
35°	373.4
37.5°	270.5
40°	185.9
42.5°	119.5
45°	71.4
47.5°	39.8
50°	21.6
52.5°	11.6
55°	8.3
57.5°	6.6
60°	5.0
62.5°	5.0
65°	3.3
67.5°	1.7
70°	1.7
72.5°	1.7
75°	1.7
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)