

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P205708

Luminaire Tested: **LD4B20D010 EU4B10209024 4LBSH1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P205708  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LD4B20D010 EU4B10209024 4LBSH1  
Description: PORTFOLIO 4 INCH SHALLOW RECESSED DOWNLIGHT  
SHALLOW DISTRIBUTION WITH SEMI-SPECULAR CLEAR TRIM  
WATTAGE D010TR-21.86W DE010-20.46W D5LT-21.24W DMX-20.89W DL2-22.5W  
DL3-21.8 6W DLE-22.46W  
Light Source: HIGH LUMEN LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1437.0 lumens  
Efficiency: N/A  
Efficacy: 69.1 lumens/watt  
Spacing Criteria (0/90/45): 1.06 / 1.06 / 1.17  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 20.8  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P205708

CATALOG NUMBER: LD4B20D010 EU4B10209024 4LBSH1

### Luminous Intensity Polar Plot

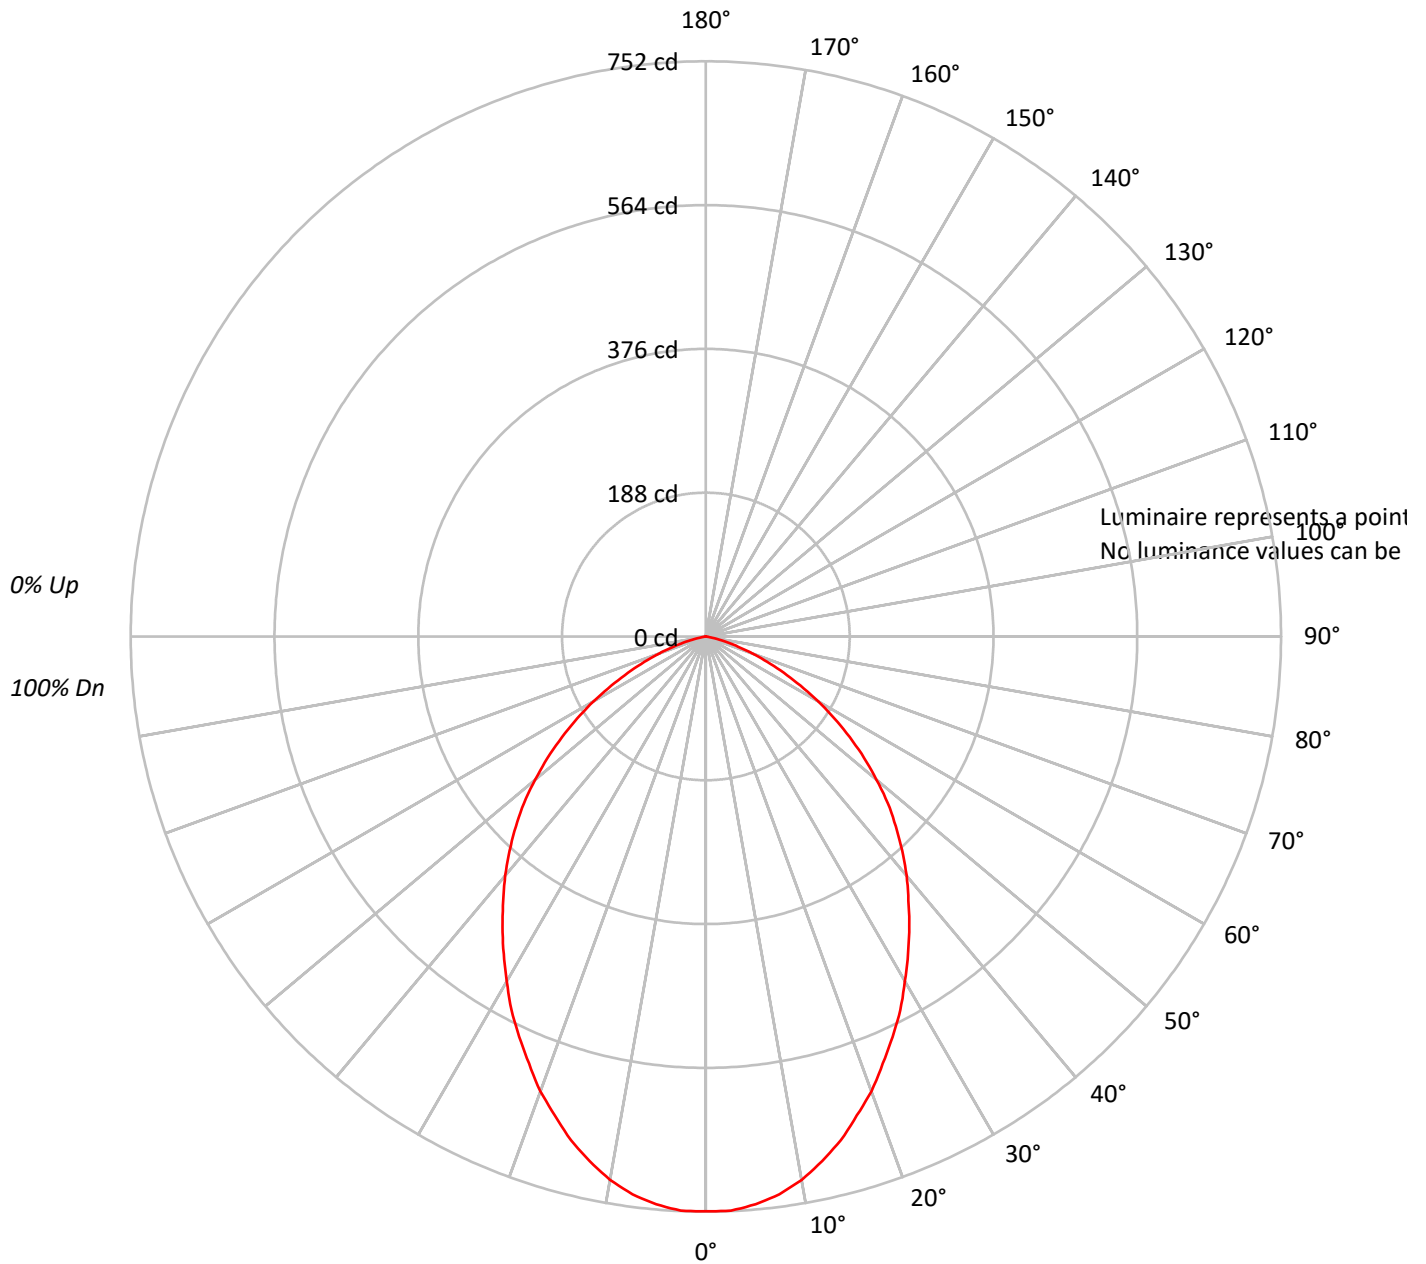




TEST NUMBER: P205708

CATALOG NUMBER: LD4B20D010 EU4B10209024 4LBSH1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |  |     |     |     |  |  |     |     |     |  |  |     |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|--|-----|-----|-----|--|--|-----|-----|-----|--|--|-----|
| RF  | 20  |     |     |     | 20  |     |     |     |  | 20  |     |     |  |  | 20  |     |     |  |  | 20  |
| RC  | 80  |     |     |     | 70  |     |     |     |  | 50  |     |     |  |  | 30  |     |     |  |  | 10  |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  |  | 50  | 30  | 10  |  |  | 50  | 30  | 10  |  |  | 50  |
| RCR |     |     |     |     |     |     |     |     |  |     |     |     |  |  |     |     |     |  |  |     |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 |  | 111 | 111 | 111 |  |  | 106 | 106 | 106 |  |  | 102 |
| 1   | 111 | 107 | 104 | 101 | 108 | 105 | 102 | 99  |  | 101 | 98  | 96  |  |  | 97  | 95  | 93  |  |  | 93  |
| 2   | 102 | 96  | 90  | 85  | 100 | 94  | 88  | 84  |  | 90  | 86  | 82  |  |  | 87  | 83  | 80  |  |  | 84  |
| 3   | 95  | 85  | 78  | 73  | 92  | 84  | 77  | 72  |  | 81  | 75  | 71  |  |  | 78  | 74  | 70  |  |  | 76  |
| 4   | 87  | 77  | 69  | 63  | 85  | 75  | 68  | 63  |  | 73  | 67  | 62  |  |  | 71  | 65  | 61  |  |  | 69  |
| 5   | 81  | 69  | 61  | 55  | 79  | 68  | 61  | 55  |  | 66  | 60  | 55  |  |  | 64  | 59  | 54  |  |  | 63  |
| 6   | 75  | 63  | 55  | 49  | 73  | 62  | 54  | 49  |  | 60  | 54  | 49  |  |  | 59  | 53  | 48  |  |  | 57  |
| 7   | 70  | 58  | 50  | 44  | 68  | 57  | 49  | 44  |  | 55  | 49  | 44  |  |  | 54  | 48  | 43  |  |  | 53  |
| 8   | 65  | 53  | 45  | 40  | 64  | 52  | 45  | 40  |  | 51  | 44  | 39  |  |  | 50  | 44  | 39  |  |  | 49  |
| 9   | 61  | 49  | 41  | 36  | 60  | 48  | 41  | 36  |  | 47  | 40  | 36  |  |  | 46  | 40  | 36  |  |  | 45  |
| 10  | 58  | 45  | 38  | 33  | 56  | 45  | 38  | 33  |  | 44  | 37  | 33  |  |  | 43  | 37  | 33  |  |  | 42  |

**AVERAGE LUMINANCE (cd/sqm):**

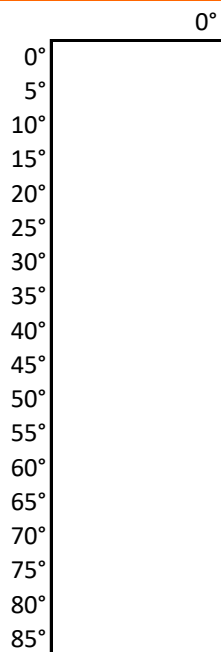



TEST NUMBER: P205708

CATALOG NUMBER: LD4B20D010 EU4B10209024 4LBSH1

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 70.4   | 4.9       |
| 10°-20°   | 191.3  | 13.3      |
| 20°-30°   | 265.7  | 18.5      |
| 30°-40°   | 290.0  | 20.2      |
| 40°-50°   | 270.5  | 18.8      |
| 50°-60°   | 205.3  | 14.3      |
| 60°-70°   | 112.4  | 7.8       |
| 70°-80°   | 31.0   | 2.2       |
| 80°-90°   | 0.4    | 0.0       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| 0°-30°    | 527.4  | 36.7      |
| 0°-40°    | 817.4  | 56.9      |
| 0°-60°    | 1293.2 | 90.0      |
| 0°-90°    | 1437.0 | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 1437.0 | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°  | Flux |
|-----|-----|------|
| 0°  | 752 |      |
| 5°  | 745 | 70   |
| 15° | 682 | 191  |
| 25° | 578 | 266  |
| 35° | 464 | 290  |
| 45° | 351 | 270  |
| 55° | 229 | 205  |
| 65° | 112 | 112  |
| 75° | 27  | 31   |
| 85° | 0   | 0    |
| 90° | 0   |      |



TEST NUMBER: P205708

CATALOG NUMBER: LD4B20D010 EU4B10209024 4LBSH1

**CANDELA DISTRIBUTION (FULL):**

|       | 0°    |
|-------|-------|
| 0°    | 751.5 |
| 2.5°  | 751.5 |
| 5°    | 745.2 |
| 7.5°  | 735.7 |
| 10°   | 721.5 |
| 12.5° | 702.5 |
| 15°   | 681.9 |
| 17.5° | 656.6 |
| 20°   | 632.9 |
| 22.5° | 604.4 |
| 25°   | 577.5 |
| 27.5° | 550.6 |
| 30°   | 520.5 |
| 32.5° | 492.0 |
| 35°   | 463.6 |
| 37.5° | 435.1 |
| 40°   | 408.2 |
| 42.5° | 379.7 |
| 45°   | 351.2 |
| 47.5° | 322.8 |
| 50°   | 291.1 |
| 52.5° | 261.1 |
| 55°   | 229.4 |
| 57.5° | 199.4 |
| 60°   | 169.3 |
| 62.5° | 139.2 |
| 65°   | 112.3 |
| 67.5° | 87.0  |
| 70°   | 64.9  |
| 72.5° | 44.3  |
| 75°   | 26.9  |
| 77.5° | 12.7  |
| 80°   | 3.2   |
| 82.5° | 0.0   |
| 85°   | 0.0   |
| 87.5° | 0.0   |
| 90°   | 0.0   |



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)