

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P207374

Luminaire Tested: **LD4B30D010 EU4B30508050 4LBMGPH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P207374
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD4B30D010 EU4B30508050 4LBMGPH1
Description: PORTFOLIO 4 INCH 50 DEGREE CUTOFF RECESSED DOWNLIGHT
MEDIUM DISTRIBUTION WITH GRAPHITE HAZE TRIM
WATTAGE D010TR-27.4W DE010-27.95W D5LT-27.65W DMX-27.73W DL2-29.56W
DL3-29.67W DLE-29.73W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1631.0 lumens
Efficiency: N/A
Efficacy: 58.3 lumens/watt
Spacing Criteria (0/90/45): 0.94 / 0.94 / 0.92
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 28
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P207374

CATALOG NUMBER: LD4B30D010 EU4B30508050 4LBMGPH1

Luminous Intensity Polar Plot

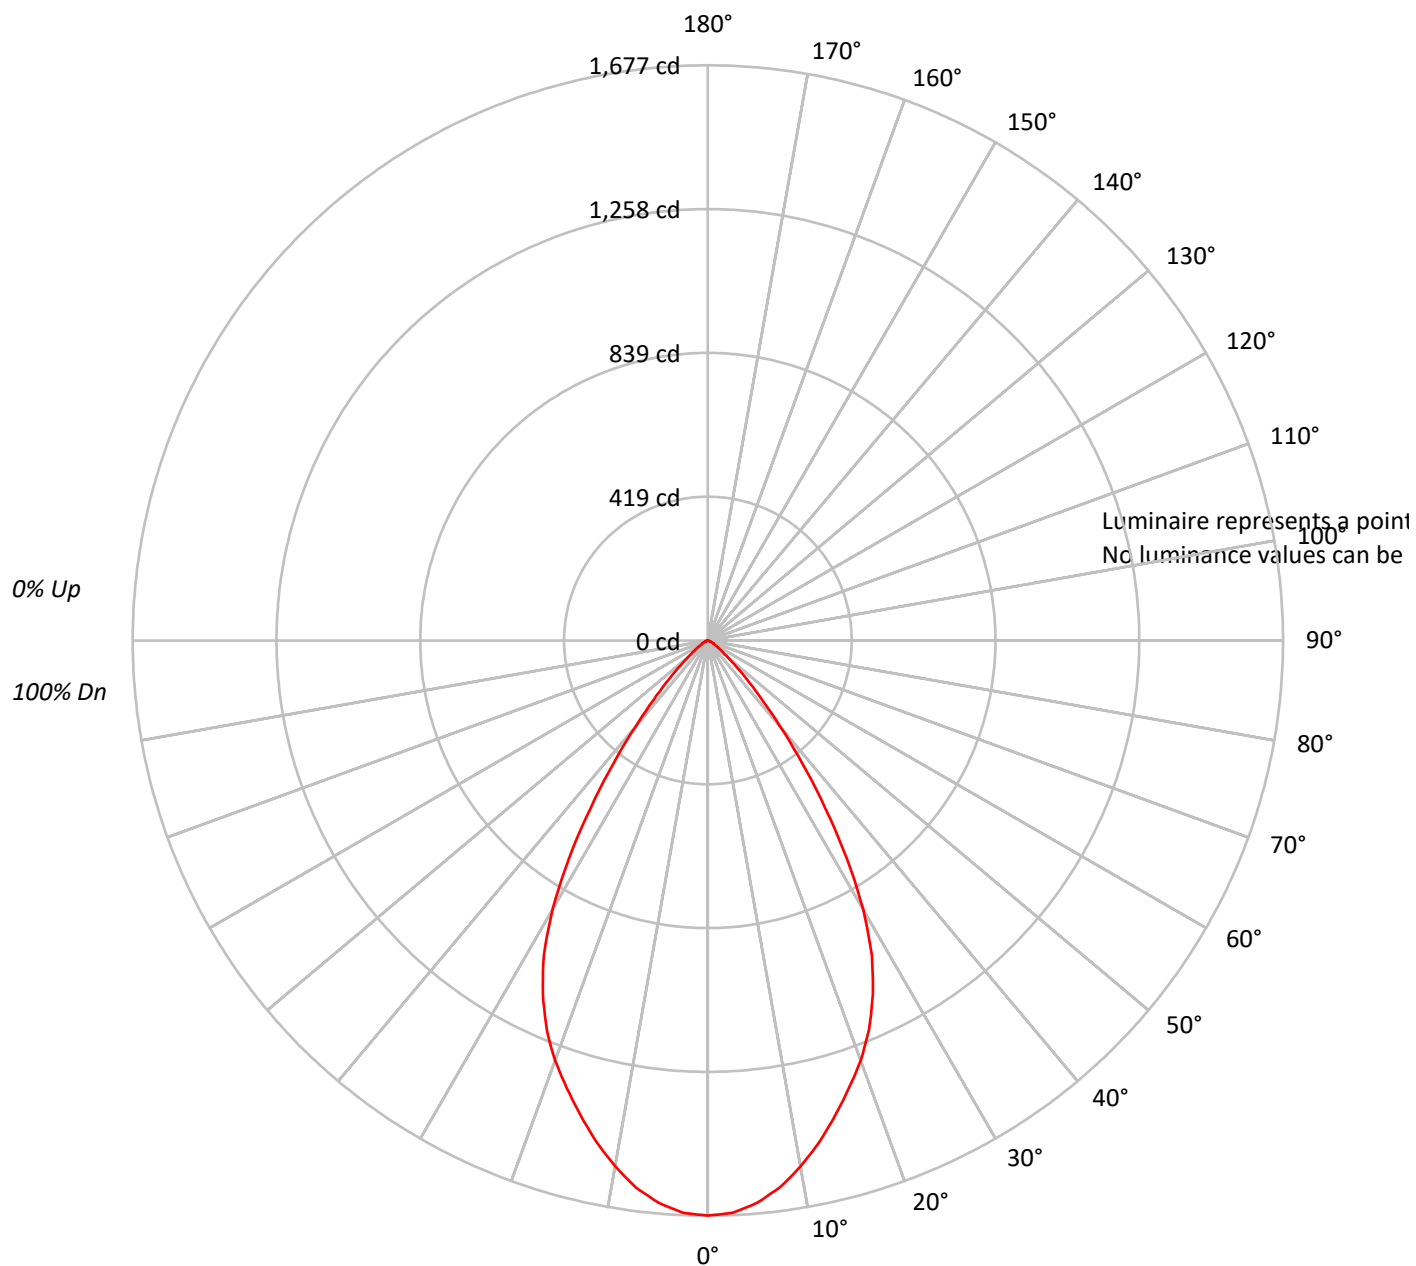



TEST NUMBER: P207374

CATALOG NUMBER: LD4B30D010 EU4B30508050 4LBMGPH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					0
RW	70	50	30	10	70	50	30	10		50	30	10			50	30	10			0
RCR																				
0	119	119	119	119	116	116	116	116		111	111	111			106	106	106			102
1	113	110	108	105	111	108	106	104		104	102	101			100	99	98			97
2	107	102	98	94	105	100	97	93		97	94	91			94	92	89			91
3	102	95	90	85	100	93	89	85		91	87	83			88	85	82			86
4	96	88	82	78	94	87	82	78		85	80	77			83	79	76			81
5	91	82	76	72	89	81	76	71		79	74	71			78	73	70			76
6	86	77	71	66	85	76	70	66		74	69	65			73	68	65			72
7	82	72	66	61	80	71	65	61		70	65	61			69	64	60			68
8	77	67	61	57	76	67	61	57		66	60	57			65	60	56			64
9	73	63	57	53	72	63	57	53		62	57	53			61	56	53			60
10	70	60	54	50	69	59	54	50		59	53	50			58	53	49			57

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P207374

CATALOG NUMBER: LD4B30D010 EU4B30508050 4LBMGPH1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	154.3	9.5
10°-20°	402.4	24.7
20°-30°	516.1	31.6
30°-40°	373.0	22.9
40°-50°	133.8	8.2
50°-60°	36.1	2.2
60°-70°	11.8	0.7
70°-80°	3.6	0.2
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1072.8	65.8
0°-40°	1445.8	88.6
0°-60°	1615.6	99.1
0°-90°	1631.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1631.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1677	
5°	1646	154
15°	1433	402
25°	1138	516
35°	597	373
45°	161	134
55°	38	36
65°	10	12
75°	3	4
85°	0	0
90°	0	



TEST NUMBER: P207374

CATALOG NUMBER: LD4B30D010 EU4B30508050 4LBMGPH1

CANDELA DISTRIBUTION (FULL):

0°	
0°	1676.9
2.5°	1670.0
5°	1646.0
7.5°	1608.3
10°	1556.8
12.5°	1498.5
15°	1433.4
17.5°	1368.2
20°	1303.1
22.5°	1227.6
25°	1138.5
27.5°	1035.6
30°	905.3
32.5°	754.4
35°	596.7
37.5°	452.6
40°	329.2
42.5°	233.2
45°	161.2
47.5°	109.7
50°	72.0
52.5°	51.4
55°	37.7
57.5°	27.4
60°	20.6
62.5°	17.1
65°	10.3
67.5°	6.9
70°	6.9
72.5°	3.4
75°	3.4
77.5°	3.4
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)